

Downloaded by



Jaybeam Limited

# Amateur Radio Antennas



# CONTENTS

PAGE		PAGE	
2-3	INTRODUCTION	22	LR1/2M
4	TB3	23	C5/2M
5	VR3	24	DC1/WB
6	4Y/4M	25	D8/70cm
7	5Y/2M	26	PBM18/70cm
8	8Y/2M	27	MBM48/70cm
9	10Y/2M	28	MBM88/70cm
10	PBM10/2M	29	C8/70cm
11	PBM14/2M	30	8XY/70cm
12	5XY/2M	31	12XY/70cm
13	8XY/2M	32	D15/1296
14	10XY/2M	33	PHASING HARNESSSES
15	X6/2M/X12/70cm	34	TAS
16	Q4/2M	35	U5/H
17	Q6/2M	36	9502/220
18	D5/2M	37	KR400
19	D8/2M	38	MASTS
20	UGP/2M	39	ACCESSORIES
21	HO/2M-HM/2M	40	MOUNTING BRACKETS

**Downloaded by**  
**RadioManual.EU**



## INTRODUCTION

**Jaybeam Limited** (A member of the Jones Stroud Group of Companies) continues to produce the world famous amateur antennas formerly manufactured by J. Beam Engineering Limited. Over a quarter of a century of experience in the telecommunications field is now backed by excellent research, development and production facilities at a new factory in Northampton, U.K.

### DESIGN LEADERSHIP

Recent advances in antenna design such as the use of inverse baluns, slant and circular polarisation that have been applied to telecommunications antennas are now applied to our amateur range. As part of a continued expansion programme there are several additions to the range of amateur antennas now available; however to simplify production and marketing and also to conform with telecommunication standards it has been decided to withdraw the 75 ohm models. Many antennas in the range will still be suitable for use on both 75 ohm and 50 ohm systems; and these are indicated on the relevant pages in the catalogue. However, a matching transformer is available for use on 75 ohm systems where necessary. The recommendations of the International Electrotechnical Commission (I.E.C. 138 and 138A) and the I.E.E. (Revision of 48 I.R.E.252 Jan. 1965) have been taken into account where technical details are quoted. Both these professional bodies stipulate stringent conditions on the measurement of the electrical and mechanical characteristics of antennas.

### STACKING AND BAYING

Where additional gain is required, stacking or baying two identical antennas at a spacing greater than one wavelength offers a further 3dB gain. The construction of an array of four gives 6dB gain above the single antenna. Stacking and baying distances are not critical for forward gain but the size and position of side lobes in the radiation pattern are affected. A compromise between maximum gain and minimum sidelobe levels is usually found at a spacing of 1.5 wavelengths.

### CHOICE OF POLARISATION

All amateur antennas may be mounted for horizontal or vertical polarisation if care is taken to support the booms correctly, and to avoid interference by nearby structures.

With the growing interest in long distance communications a range of crossed yagis is offered. By phasing cross yagis correctly, it is possible to obtain circular polarisation and make a great reduction in the fluctuation of signal levels caused by polarisation twisting owing to tropospheric conditions.

### MATCHING

In order to transfer power from the transmitter to antenna or from antenna to receiver it is essential that impedances are matched. For example a 50 ohm antenna should be used with 50 ohm coaxial cable and 50 ohm equipment. If a 75 ohm antenna is used with 50 ohm cable then a poor V.S.W.R. will result. When the receiver or transmitter is not matched to the rest of the system, the V.S.W.R. will appear dependent on cable length. For telecommunication antennas a limit of 1.5:1 for V.S.W.R. is generally accepted as this results in a loss of radiated or received power of only 0.18 dB; whereas a V.S.W.R. of 2:1 results in a loss of 0.5 dB. The V.S.W.R. of amateur antennas should be less than 1.5:1 but variations in siting and mounting can affect this. In some cases it can deteriorate to 2.5:1 which

represents a loss of 0.88 dB or 18.5% power. For values greater than 2.5:1 there must be some serious fault in the antenna or cable.


When two or more antennas are connected together a mismatch will result. For example, two 50 ohm antennas connected in parallel will result in an impedance of 25 ohms. It is essential therefore to use a matching device such as the PMH harness in which use is made of the impedance transformation offered by an odd multiple of quarter wavelengths of cable. In the PMH/2M for example two 50 ohms antennas are transformed through lengths of 75 ohm cable to give approximately 100 ohms at each side of a "T" junction and the two 100 ohms in parallel give 50 ohms. The downlead in the harness is a quarter wavelength of 50 ohm cable which presents 50 ohms at the plug. The same harness could be used to couple two 75 ohm antennas because in this case two 75 ohm impedances appear in parallel at the "T" junction i.e. 37.5 ohms. This is then transformed via the quarter wavelength of 50 ohm cable to give 75 ohms at the plug.

### CIRCULAR POLARISATION


Propagation of linear polarisation over 50 km can result in Q.S.B. Whilst the degree of Q.S.B. is nearly the same for vertical and horizontal polarisation over normal ground the exact time of the fade is rarely the same. Sometimes linear polarisation can be twisted as it propagates through urban and densely wooded areas, so the angle of polarisation is often unknown. The use of circularly polarised antennas ensures that any plane of linear polarisation can be received and results in a reduction in the amount and level of Q.S.B.

Circular polarisation is a special case of elliptical polarisation in which the electric field vector rotates steadily, with constant magnitude as it progresses in the direction of propagation. The helix is used widely as an antenna for circular polarisation; but with care two linearly polarised antennas can be phased to perform the same function. The sense of the helix and the phasing of linear antennas determine the sense of circular polarisation. A right handed helix will radiate a signal with a progressive phase lag clockwise in the direction of propagation when viewed from behind. To achieve the same polarisation from a pair of linear antennas incorporating baluns needs great care, otherwise slant or elliptical polarisation will result. There are two methods employed in the amateur range. The most common on 2 metres is by the use of two yagi arrays almost coincident; but at right angles on a common boom. One yagi array is connected to a coaxial cable one quarter wavelength longer than the cable to the other array, as in the PMH/2C in which matching is also incorporated. The other method incorporates a quarter wavelength stagger of the elements in each plane in which case a normal two way matching harness can be used. The second method is used for satellite band antennas and for the 70 cm band in which a patented configuration of elements is in use.

144-146 MHz




134-138 MHz and 430-440 MHz




. — directly fed side of dipole  
x — side fed via balun shown for right hand or clockwise circular polarisation

# TB3

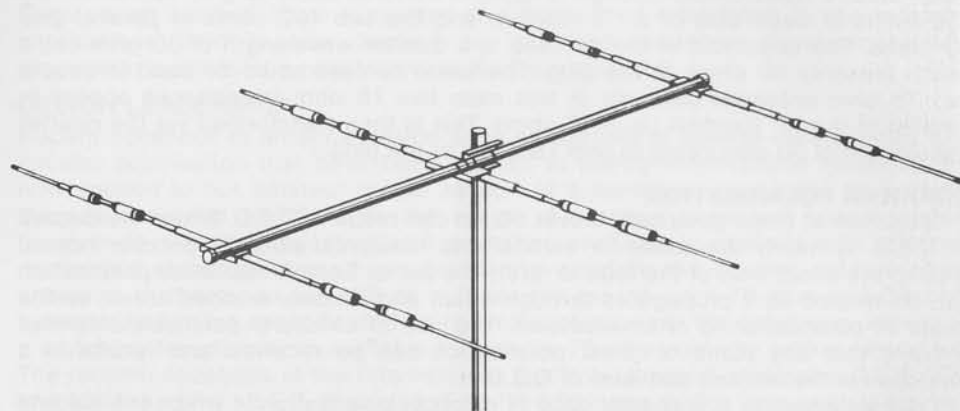

TYPICAL V.S.W.R. CURVES

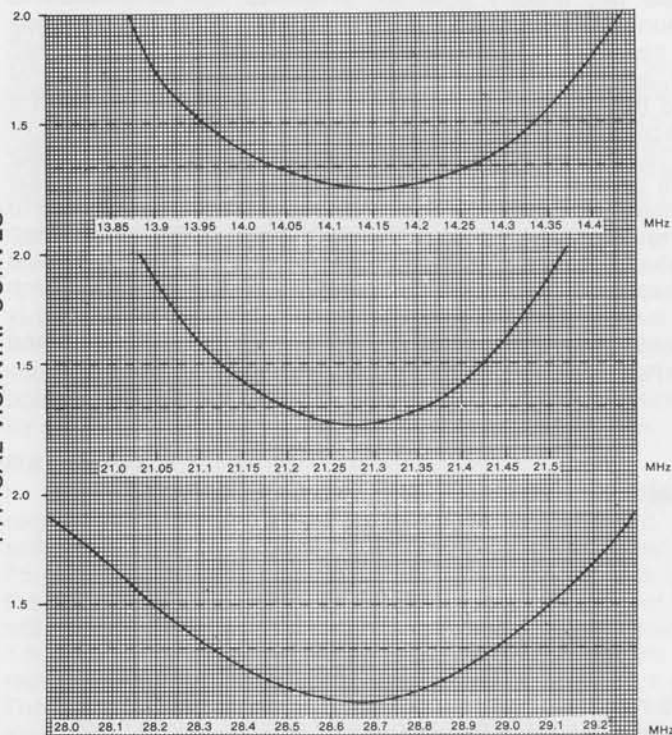


**TB3**  
 Input Impedance : 50 ohms  
 Gain : 8 db peak  
 Front to Back Ratio : 25 dB  
 Maximum Input Power : 2 Kw PEP  
 VSWR at Resonance : <1.5:1  
 Boom Length : 420 cm  
 Boom Diameter : 51 mm  
 Turning Circle : 902 cm  
 Mast Diameter : 47-51 mm  
 Net Weight : 17.3 kg  
 Wind Loading at 130 kph : 52 kgf

# VR3




## VR3


Input Impedance : 50 ohms  
 Frequency Range : 10, 15, 20 metres  
 VSWR at Resonance : <1.5:1  
 Maximum Power : 2 Kw PEP  
 Static Protection : DC Short Circuit  
 Termination : UHF socket  
 Height : 410 cm max  
 Wind Loading at 130 kph : 7.5 kgf  
 Mast Clamp Diameter : Upto 51 mm(max)  
 Net weight : 2.7 kg

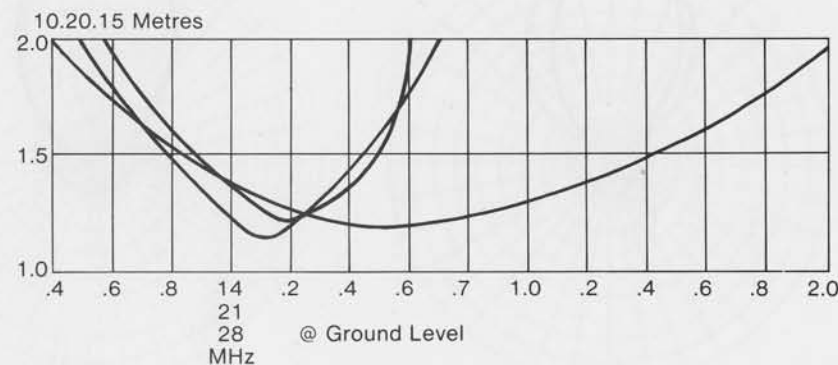

## 4Y/4M

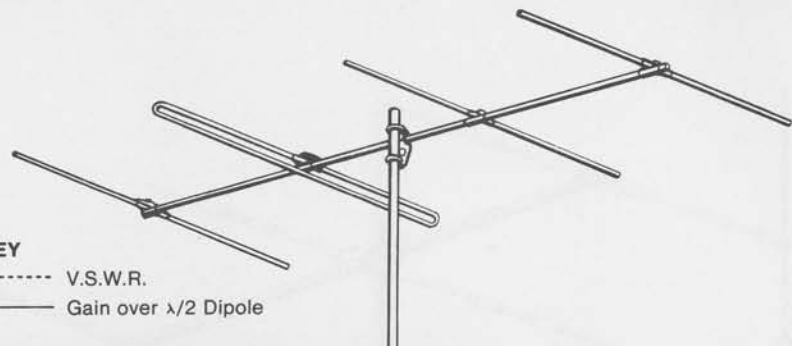


**KEY**  
 ----- V.S.W.R.  
 ——— Gain over  $\lambda/2$  Dipole

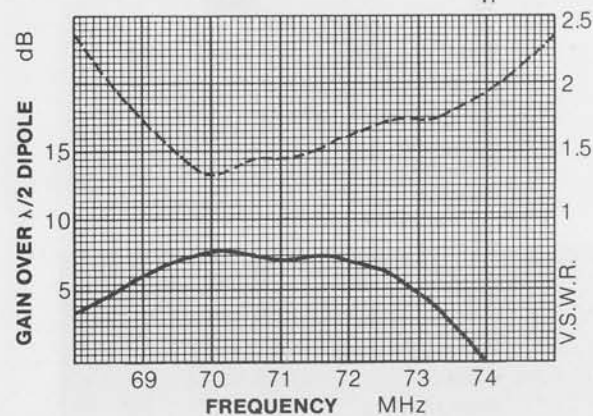


### 4Y/4M

Gain : 7 dBd  
 Horizontal Beamwidth : 58°  
 Power Rating : 1 Kw Peak  
 Weight : 4.1 Kg  
 Wind Load  
 160 Km/h : 25 kgf  
 Length : 2.3 metres  
 Design : Suitable for 50 ohms or 75 ohms  
 Impedance


**POLAR DIAGRAM  
E PLANE**

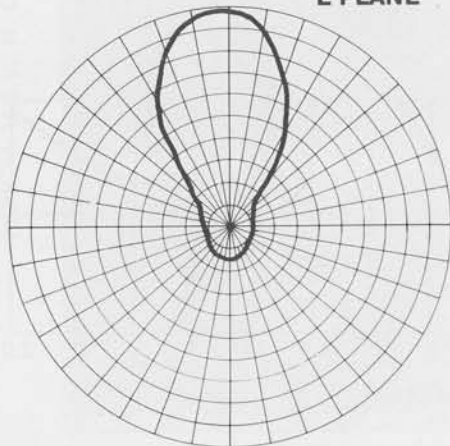


**POLAR DIAGRAM  
H PLANE**

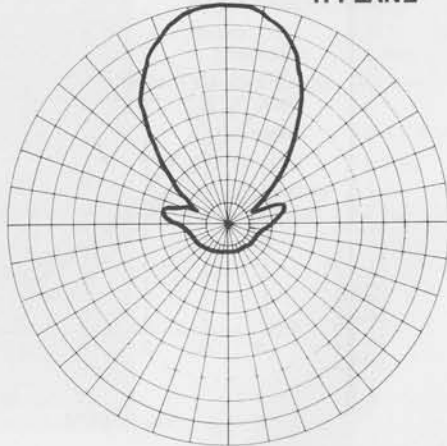

## 5Y/2M

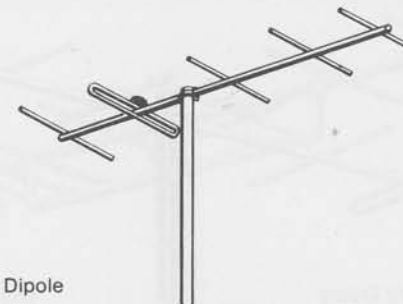


**KEY**  
 ----- V.S.W.R.  
 ——— Gain over  $\lambda/2$  Dipole

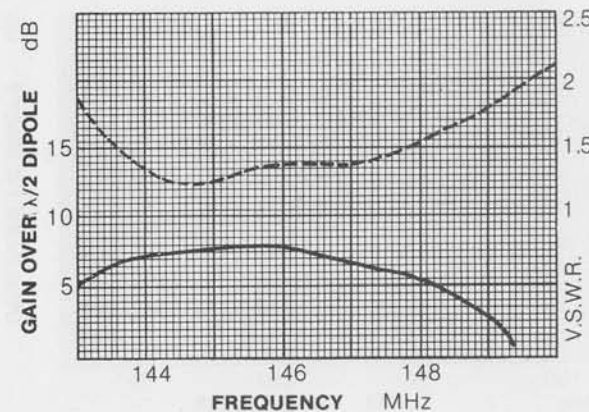


### 5Y/2M

Gain : 7.8 dBd  
 Horizontal Beamwidth : 58°  
 Power Rating : 1 Kw Peak  
 Weight : 1.8 Kg  
 Wind Load at  
 160 Km/h : 14 kgf  
 Length : 1.6 metres  
 Design : Suitable for 50 ohms  
 Impedance

**POLAR DIAGRAM  
E PLANE**


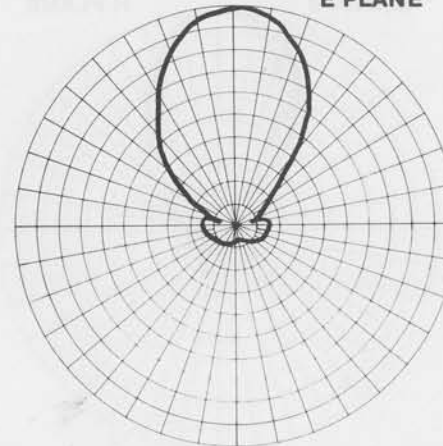


**POLAR DIAGRAM  
H PLANE**

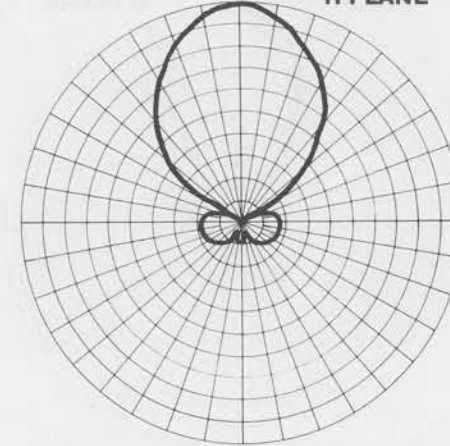




## 8Y/2M

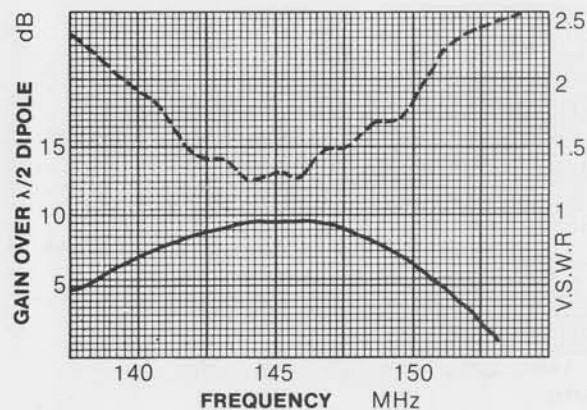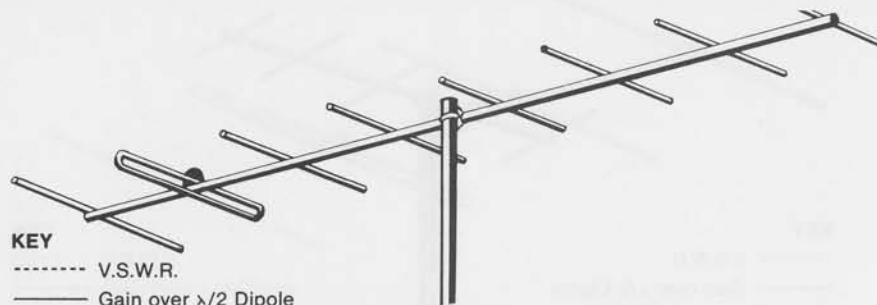


### 8Y/2M

Gain : 9.5 dBd  
 Horizontal Beamwidth : 47°  
 Power Rating : 1 Kw  
 Weight : 3.8 Kg  
 Wind Load at 160 Km/h : 24 kgf  
 Length : 2.8 metres  
 Design Impedance : 50 ohms



POLAR DIAGRAM  
E PLANE

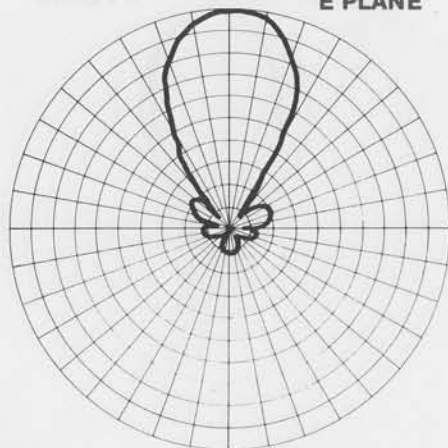

POLAR DIAGRAM  
H PLANE

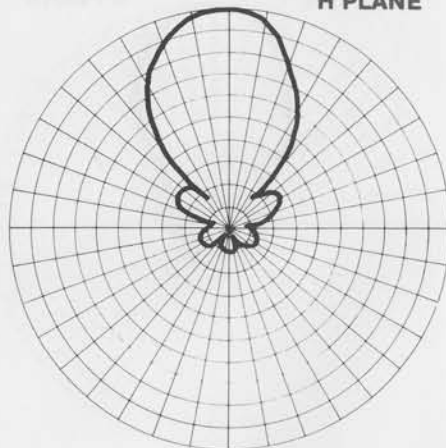


## 10Y/2M

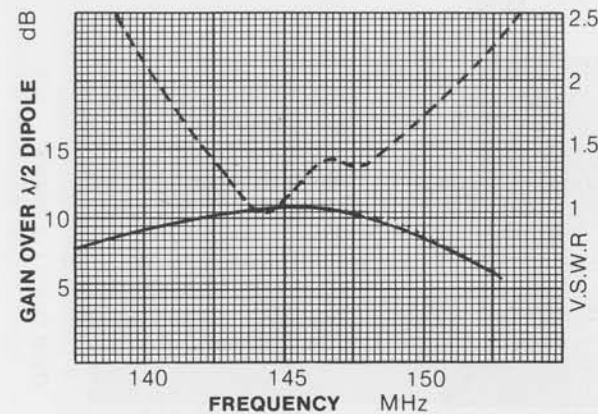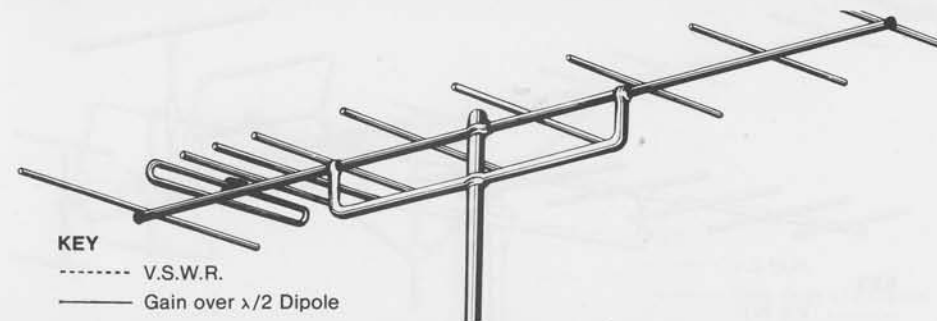


### 10Y/2M

Gain : 11.0 dBd  
 Horizontal Beamwidth : 37°  
 Power Rating : 1 Kw Peak  
 Weight : 4.5 Kg  
 Wind Load at 160 Km/h : 30 kgf  
 Length : 4.4 metres  
 Design Impedance : Suitable for 50 ohms or 75 ohms


POLAR DIAGRAM  
E PLANE

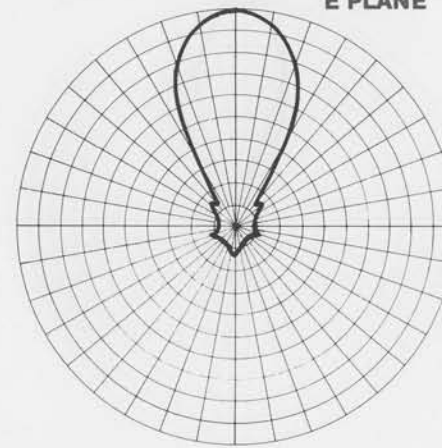


POLAR DIAGRAM  
H PLANE

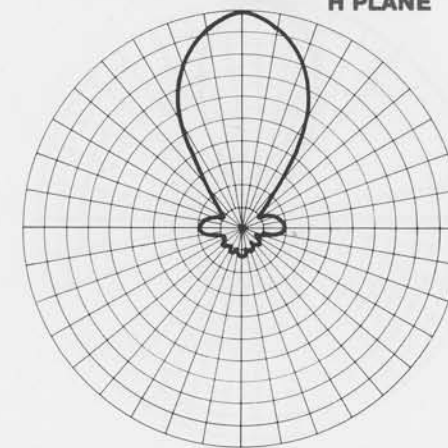

## PBM10/2M

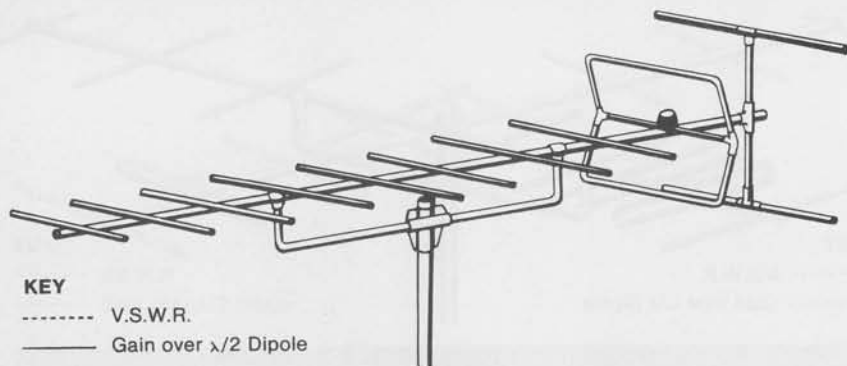


**KEY**  
 ----- V.S.W.R.  
 ——— Gain over  $\lambda/2$  Dipole

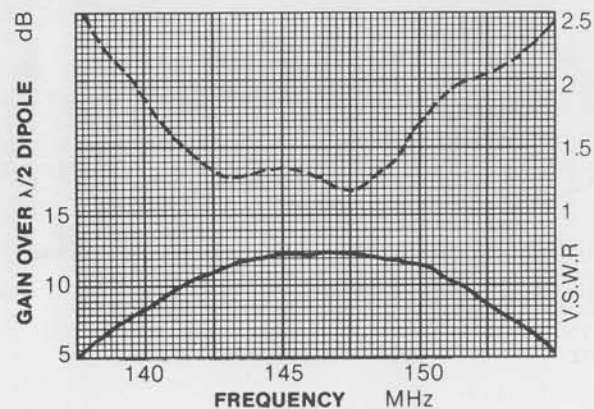


### PBM10/2M

Gain : 11.7 dBd  
 Horizontal Beamwidth : 37°  
 Power Rating : 1 Kw Peak  
 Weight : 5.2 Kg  
 Wind Load at 160 Km/h : 33 kgf  
 Length : 3.93 metres  
 Design Impedance : 50 ohms


**POLAR DIAGRAM  
E PLANE**

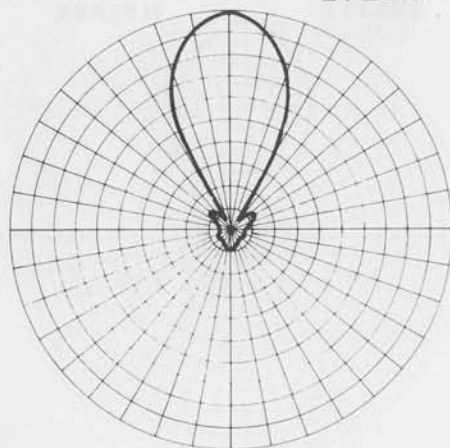


**POLAR DIAGRAM  
H PLANE**

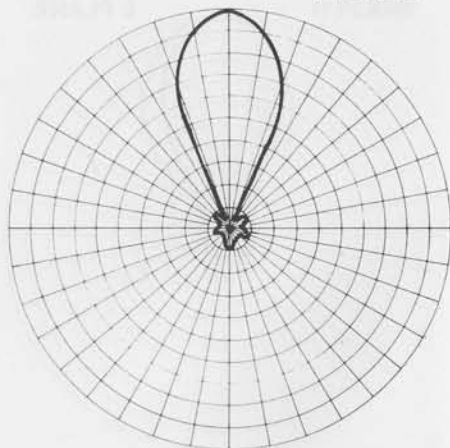

## PBM14/2M

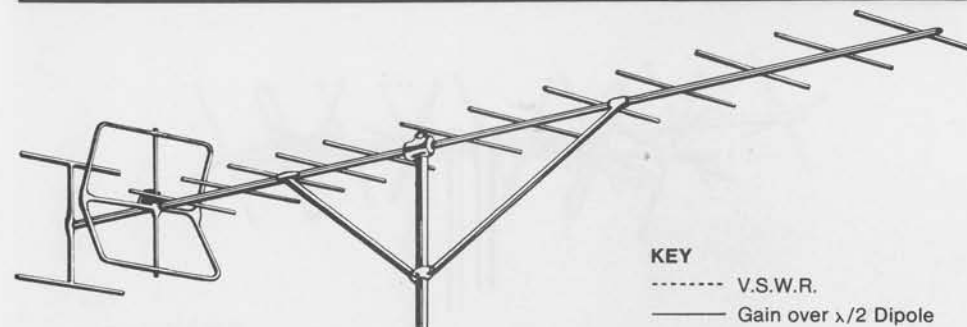


**KEY**  
 ----- V.S.W.R.  
 ——— Gain over  $\lambda/2$  Dipole

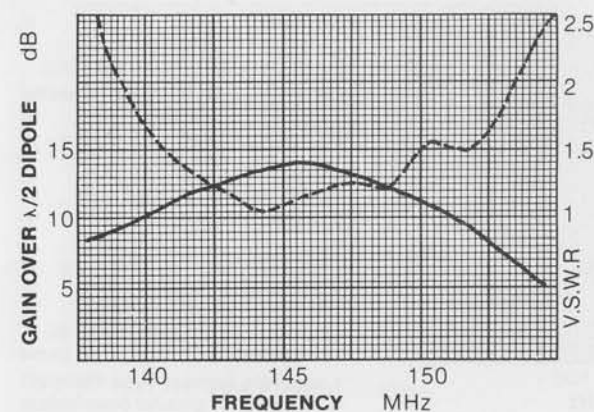


### PBM14/2M

Gain : 13.7 dBd  
 Horizontal Beamwidth : 29°  
 Power Rating : 1 Kw Peak  
 Weight : 6.5 Kg  
 Wind Load at 160 Km/h : 41 kgf  
 Length : 5.95 metres  
 Design Impedance : Suitable for 50 ohms or 75 ohms


**POLAR DIAGRAM  
E PLANE**

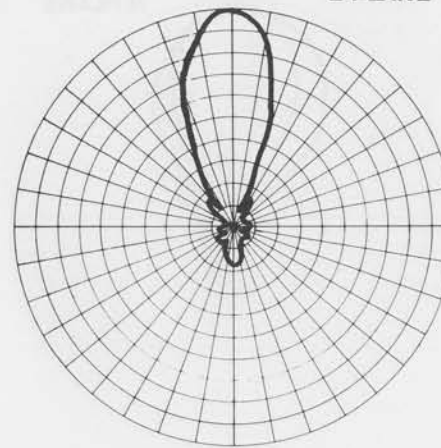

**POLAR DIAGRAM  
H PLANE**

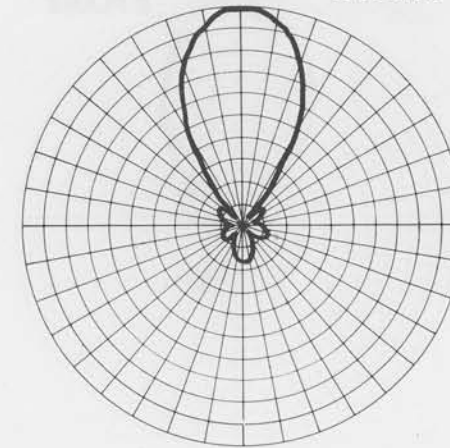


## 5XY/2M

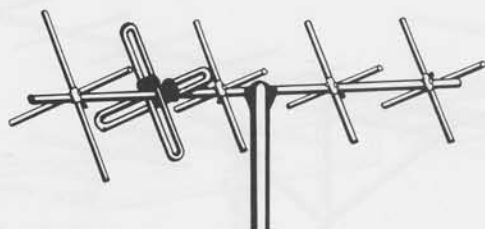

### KEY

----- V.S.W.R.

—— Gain over  $\lambda/2$  Dipole

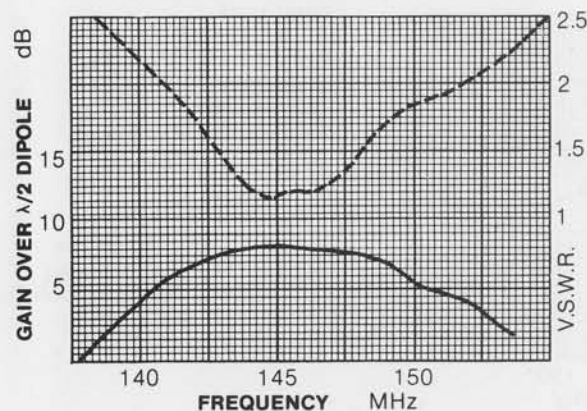

### 5XY//2M

(Also available for 134–138 MHz)  
**Gain** : 7.8 dBd in each plane

**Horizontal Beamwidth** : 58°

**Power Rating** : 1 Kw Peak

**Weight** : 2.8 Kg


**Wind Load at 160 Km/h** : 19 kgf

**Length** : 1.7 metres


**Design** : Suitable for 50 ohms or 75 ohms

**Impedance** : ohms or 75 ohms  
 A separate harness Type PMH/2C is required for circular polarisation


POLAR DIAGRAM  
E PLANE

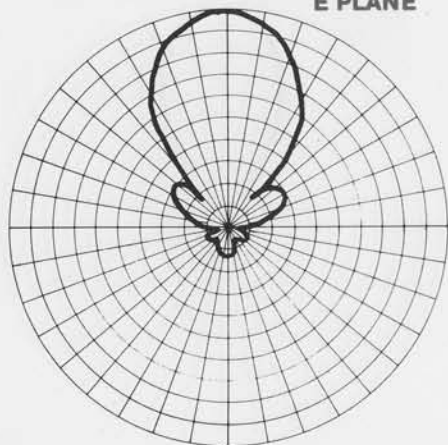

POLAR DIAGRAM  
H PLANE

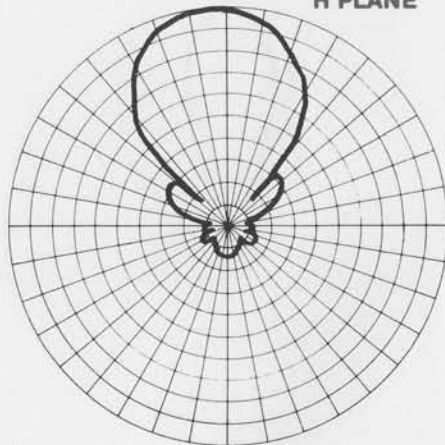


## 8XY/2M

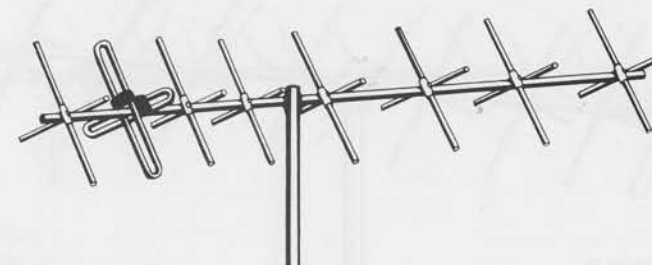

### KEY

----- V.S.W.R.

—— Gain over  $\lambda/2$  Dipole

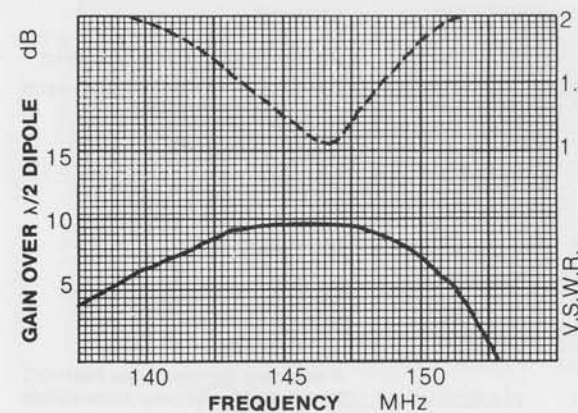

### 8XY/2M

(Also available for 134–138 MHz)  
**Gain** : 9.5 dBd in each plane

**Horizontal Beamwidth** : 47°

**Power Rating** : 1 Kw Peak

**Weight** : 4.7 Kg


**Wind Load at 160 Km/h** : 29 kgf

**Length** : 2.8 metres


**Design** : Impedance : 50 ohms

A separate harness Type PMH/2C is required for circular polarisation

POLAR DIAGRAM  
E PLANE


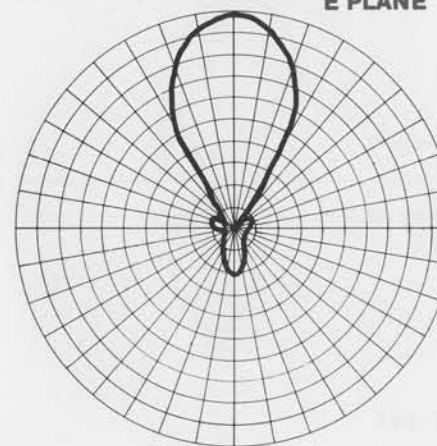


POLAR DIAGRAM  
H PLANE

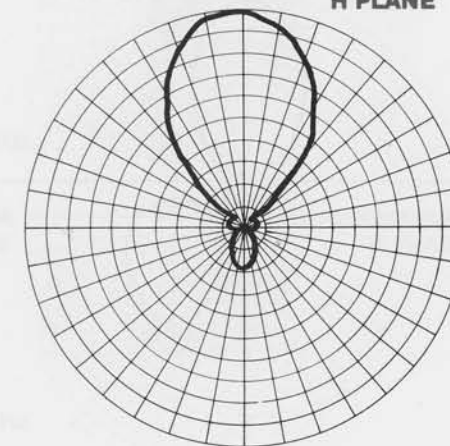





## 10XY/2M

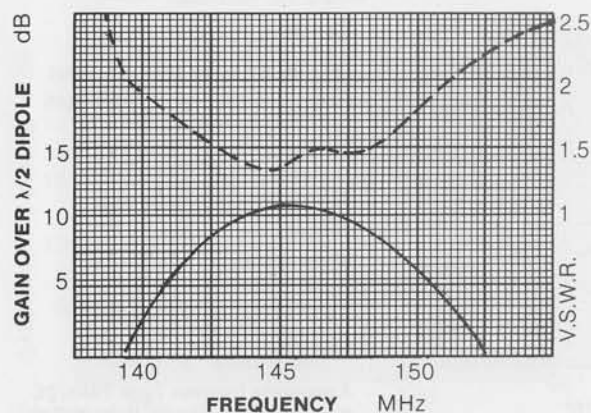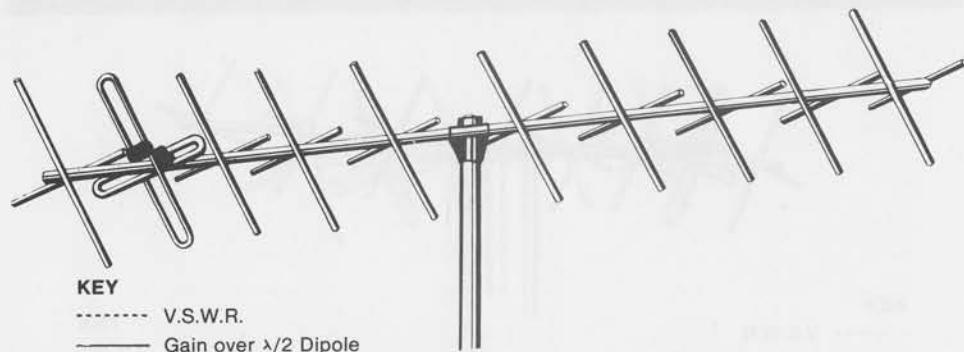



**POLAR DIAGRAM E PLANE**

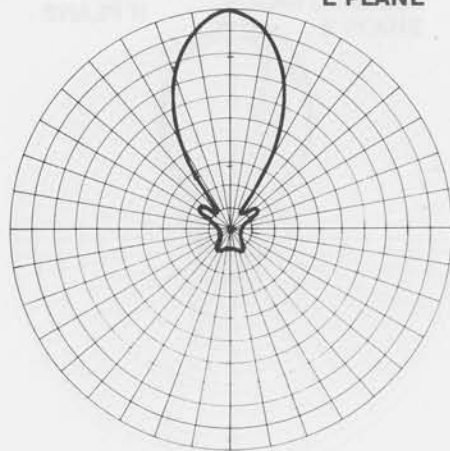

**POLAR DIAGRAM H PLANE**

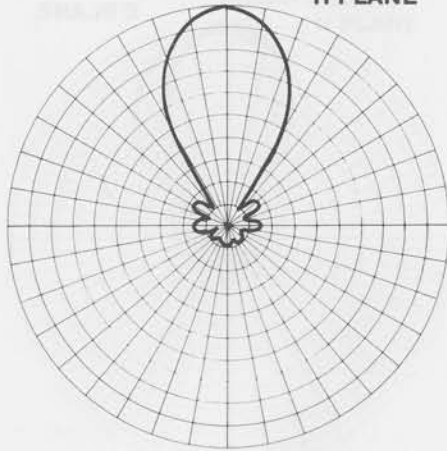


## X6/2M/X12/70cm

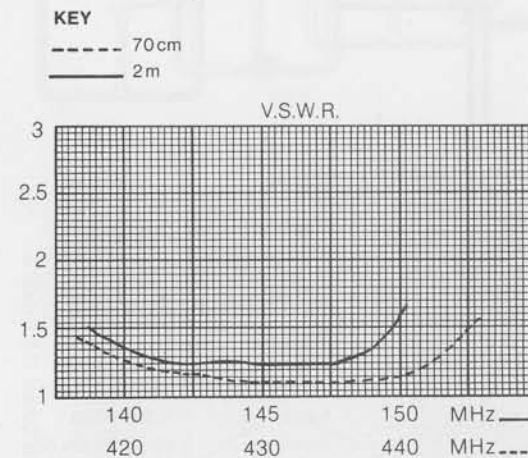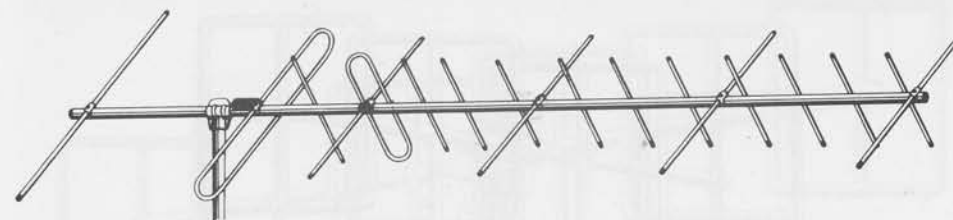


### X6/2M/X12/70cm

**Gain** : 2m : 8.5 dBd  
 70cm : 12.0 dBd  
**Horizontal Beamwidth** : 144–146 MHz:56°  
 430–440 MHz:30°  
**Power rating** : 1 kw peak  
**Weight** : 2.7 kgs  
**Wind loading at 160 km/h** : 21 kgf  
**Length** : 2.2 metres  
**Design Impedance** : 50 ohms

**POLAR DIAGRAM E PLANE**




**POLAR DIAGRAM H PLANE**




430–440 MHz

**POLAR DIAGRAM E PLANE**




**POLAR DIAGRAM H PLANE**




144–146 MHz

## Q4/2M

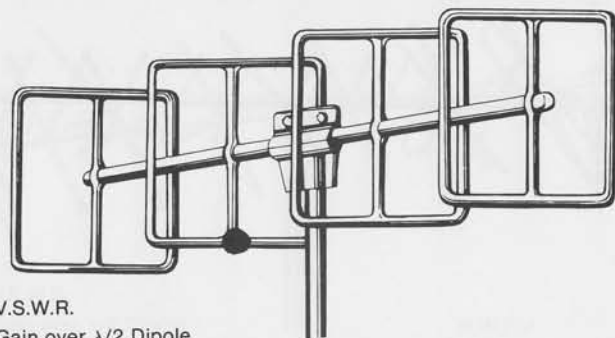


**KEY**  
 ----- V.S.W.R.  
 ——— Gain over  $\lambda/2$  Dipole

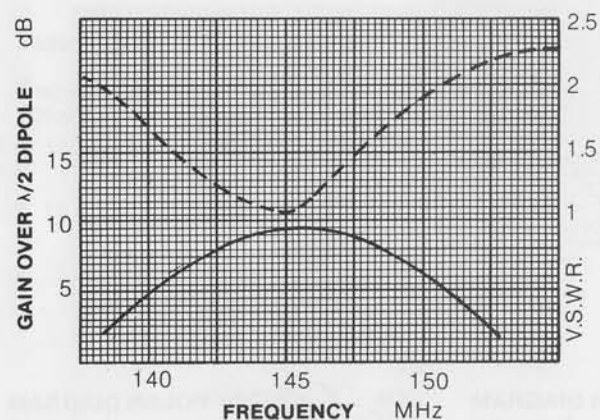


### Q4/2M

**Gain** : 9.5 dBd  
**Horizontal Beamwidth** : 48°  
**Power Rating** : 1 Kw Peak  
**Weight** : 2.7 Kg  
**Wind Load at 160 Km/h** : 22 kgf  
**Length** : 1.5 metres  
**Design Impedance** : Suitable for 50 ohms or 75 ohms


**POLAR DIAGRAM E PLANE**

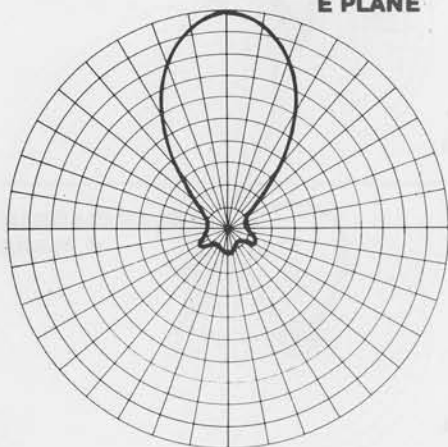


**POLAR DIAGRAM H PLANE**

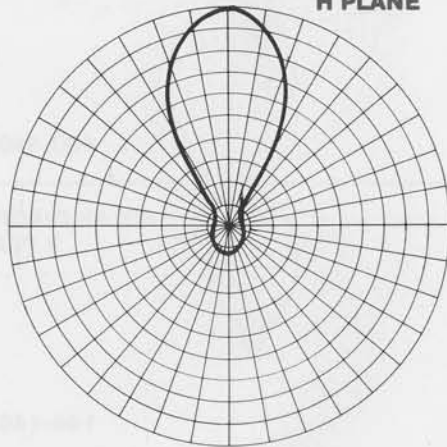

## Q6/2M

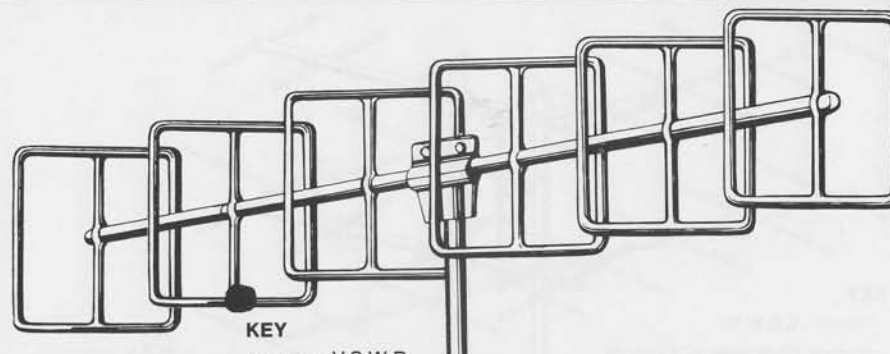


**KEY**  
 ----- V.S.W.R.  
 ——— Gain over  $\lambda/2$  Dipole

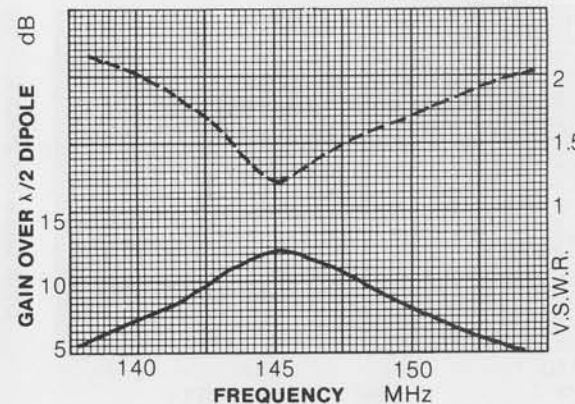


### Q6/2M

**Gain** : 12 dBd  
**Horizontal Beamwidth** : 36°  
**Power Rating** : 1 Kw Peak  
**Weight** : 3.5 Kg  
**Wind Load at 160 Km/h** : 33 kgf  
**Length** : 2.5 metres  
**Design Impedance** : Suitable for 50 ohms or 75 ohms


**POLAR DIAGRAM E PLANE**

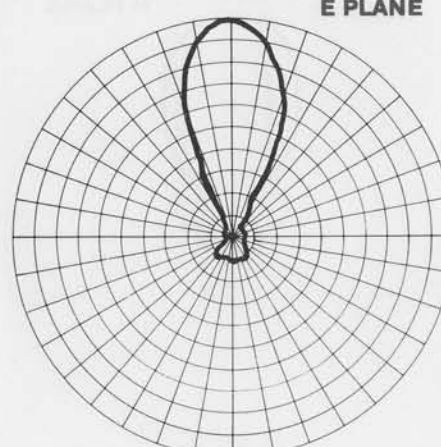

**POLAR DIAGRAM H PLANE**

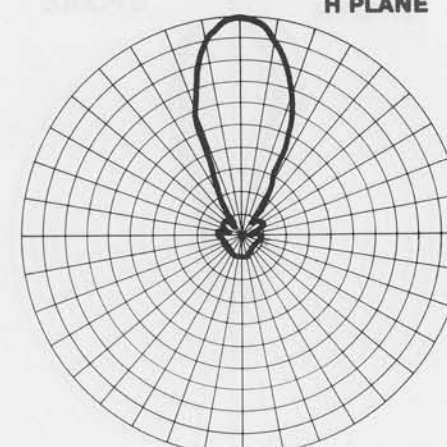


## D5/2M

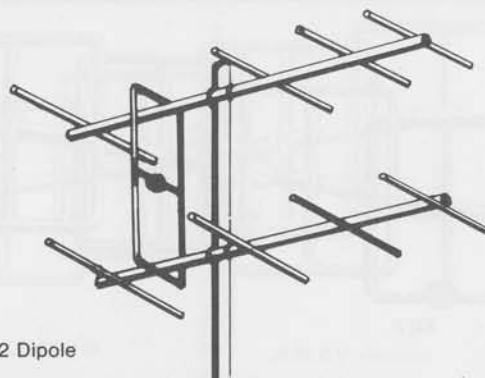

### KEY


- V.S.W.R.
- Gain over  $\lambda/2$  Dipole

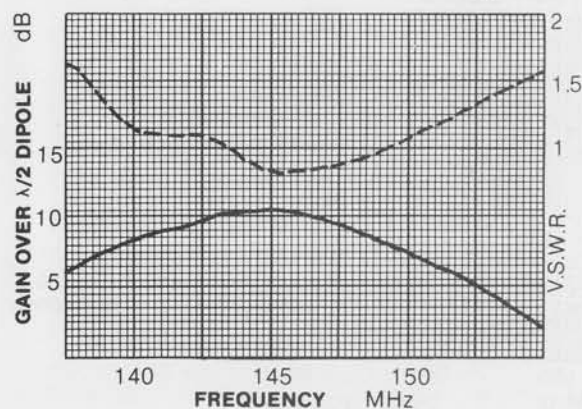


### D5/2M

Gain : 10.6 dBd  
 Horizontal Beamwidth : 52°  
 Power Rating : 1 Kw Peak  
 Weight : 3.2 Kg  
 Wind Load at 160 Km/h : 28 kgf  
 Length : 1.6 metres  
 Design Impedance : 50 ohms


POLAR DIAGRAM  
E PLANE

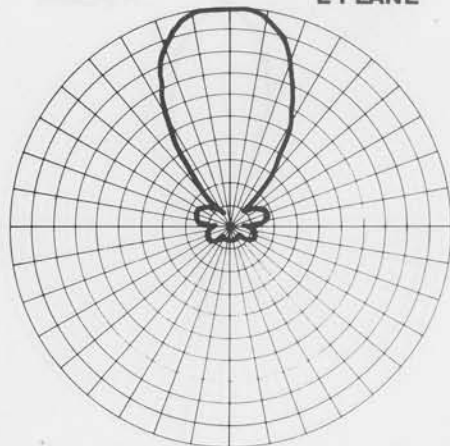

POLAR DIAGRAM  
H PLANE

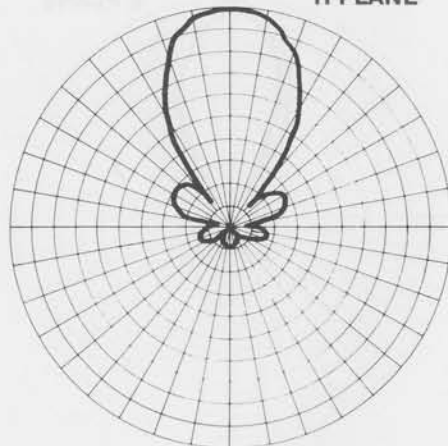


## D8/2M

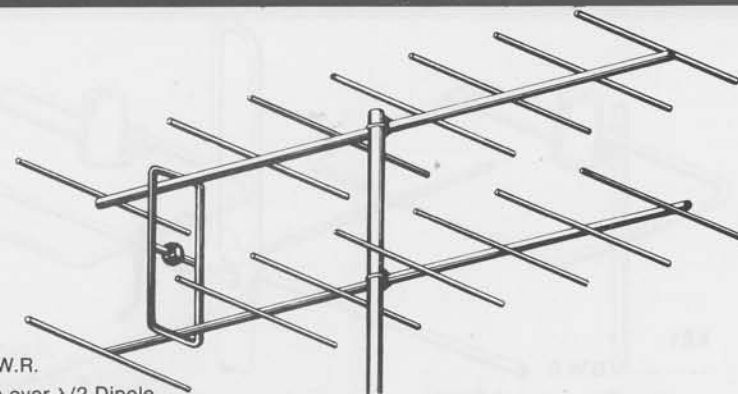

### KEY


- V.S.W.R.
- Gain over  $\lambda/2$  Dipole

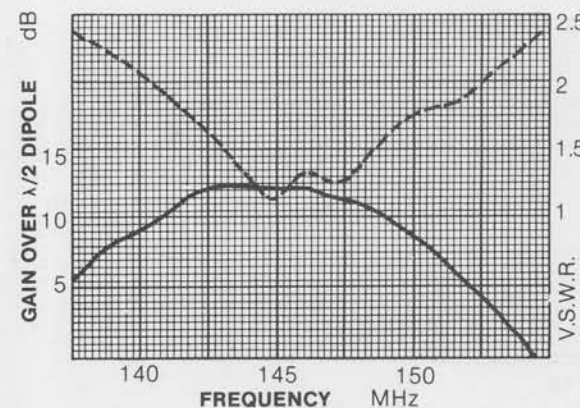


### D8/2M

Gain : 12.3 dBd  
 Horizontal Beamwidth : 45°  
 Power Rating : 1 Kw Peak  
 Weight : 4.1 Kg  
 Wind Load at 160 km/h : 41 kgf  
 Length : 2.8 metres  
 Design Impedance : 50 ohms

POLAR DIAGRAM  
E PLANE

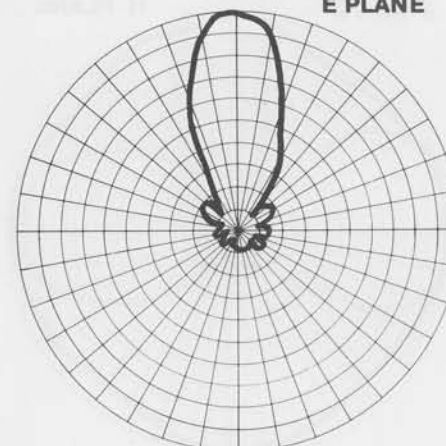


POLAR DIAGRAM  
H PLANE

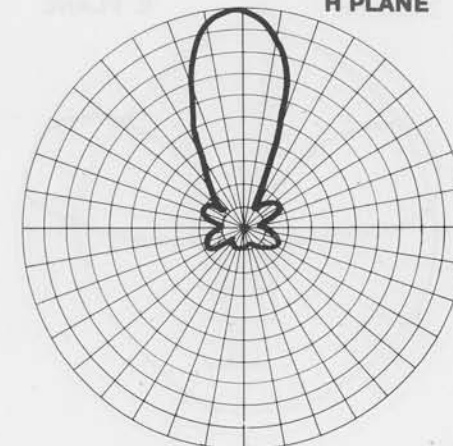




## UGP/2M

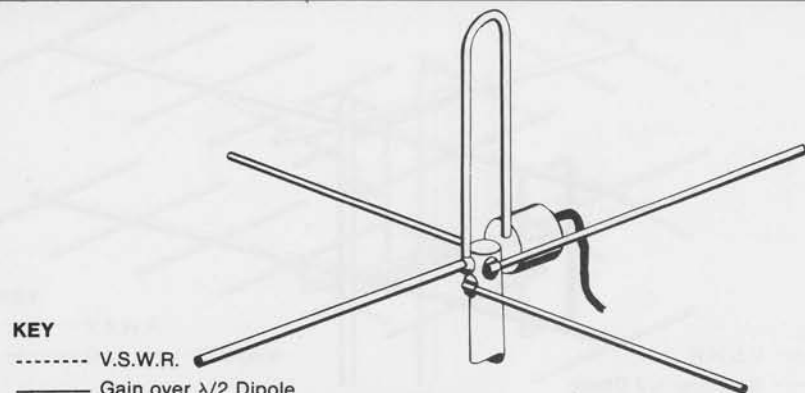


**KEY**  
 - - - - - V.S.W.R.  
 ——— Gain over  $\lambda/2$  Dipole

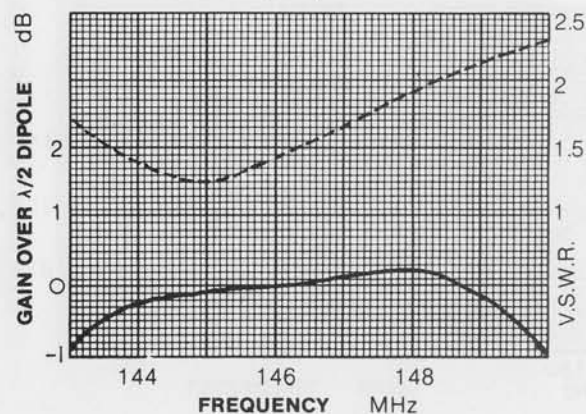


### UGP/2M

Gain : 0 dBd  
 Power Rating : 1 Kw Peak  
 Weight : 1 Kg  
 Wind Load at 160 Km/h : 5 kgf  
 Design : Suitable for 50 ohms or 75 ohms  
 Impedance

**POLAR DIAGRAM  
E PLANE**


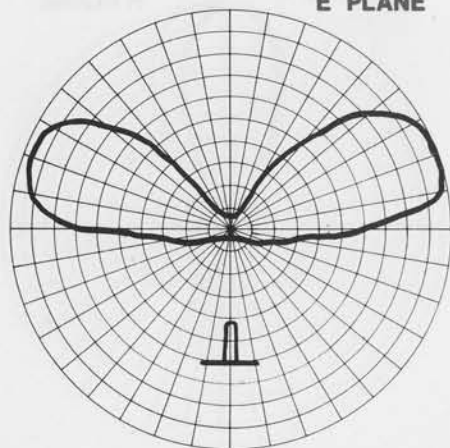


**POLAR DIAGRAM  
H PLANE**

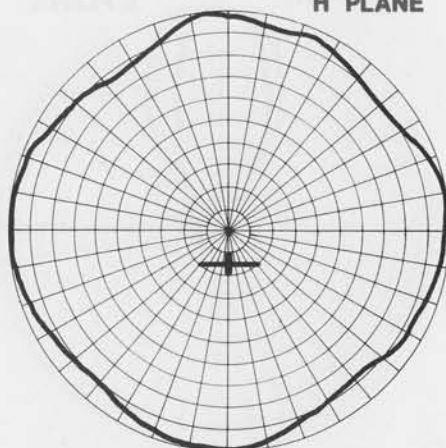


## HO/2M

## HM/2M

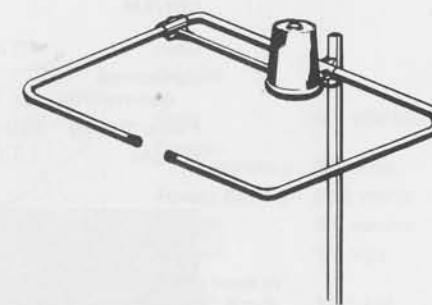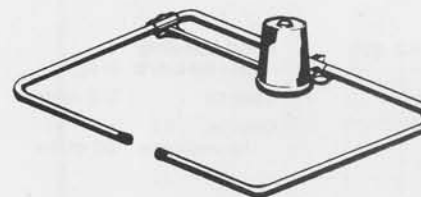


**KEY**  
 - - - - - V.S.W.R.  
 ——— Gain over  $\lambda/2$  Dipole

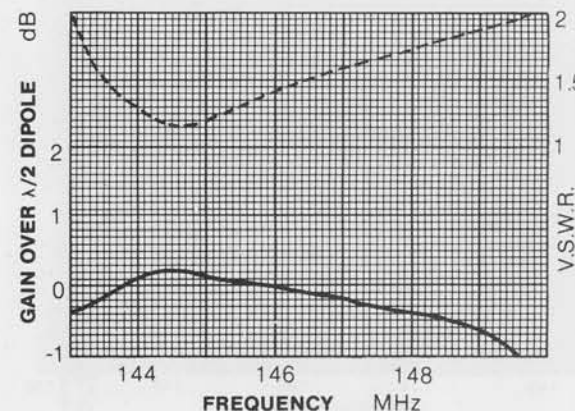


### HO/2M-HM/2M

Gain : 0 dBd  
 Power Rating : 1 Kw Peak  
 Weight : 0.5 Kg  
 Wind Load at 160 Km/h : 4 kgf  
 Design : Suitable for 50 ohms or 75 ohms  
 Impedance


**POLAR DIAGRAM  
E PLANE**

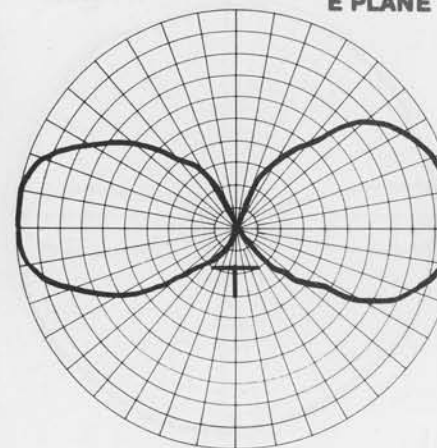

**POLAR DIAGRAM  
H PLANE**

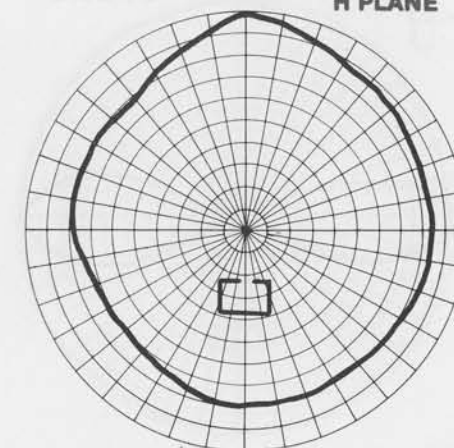

# LR1/2M

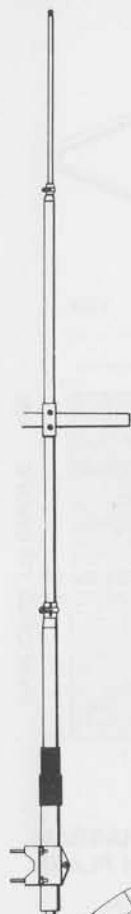

## LR1/2M

Gain : 4.3 dBd (6.5 dBi)

Horizontal Beamwidth: 25° Typical


Power Rating : 250 watts

Weight : 1.5 kg


Wind Loading at 160 km/h: 8 kgf

Length : 3.0 metres


Design Impedance: 50 ohms

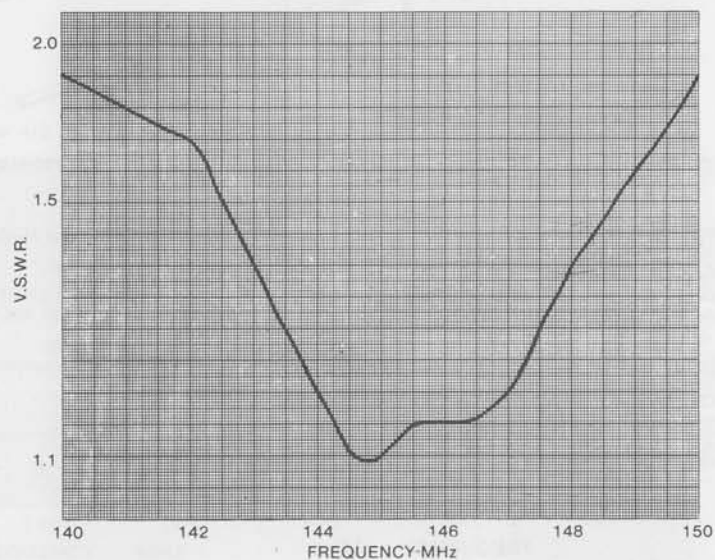



POLAR DIAGRAM  
E PLANE

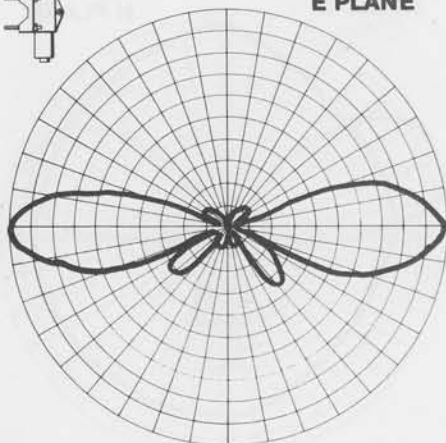

POLAR DIAGRAM  
H PLANE

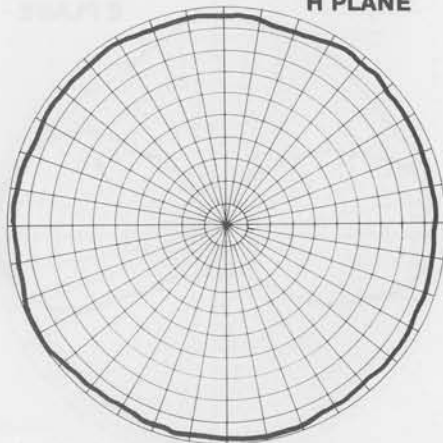

# C5/2M

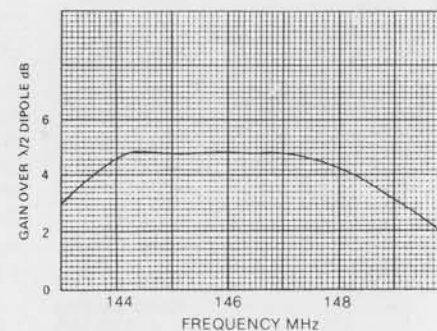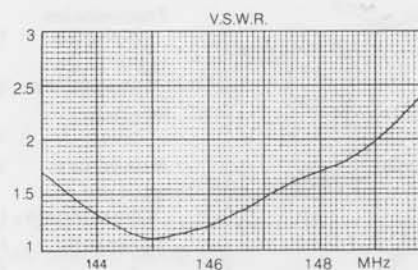

## C5/2M

Gain : 4.8 dBd (70 dBi)

Design Impedance: 50 ohms

Power Rating : 250 Watts

Length : 4.0 metres

Weight : 3.2 Kgs

Wind load at 160 Km/h : 10.1 kgf

Polarisation : Vertical

Frequency : 144-148 MHz

Vertical Beamwidth: 24°


Termination : 50 ohm 'N' Type Socket

Shroud : Glass-fibre


Mounting : 2 Type JBL29/2 Steel Clamps

V.S.W.R. : >1.5:1

POLAR DIAGRAM  
E PLANE

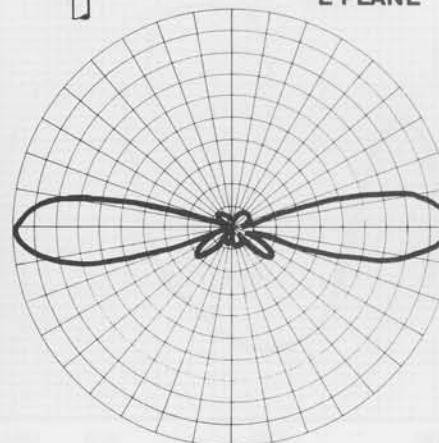



POLAR DIAGRAM  
H PLANE

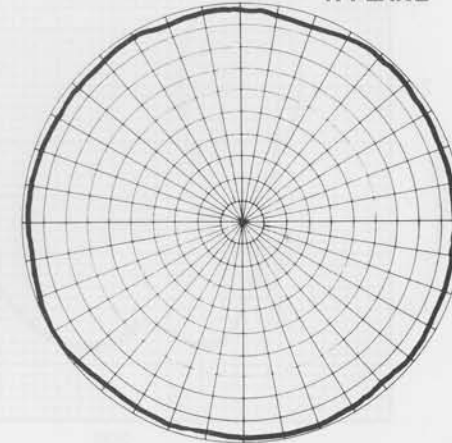


## DC1/WB

### DC1/WB

**Frequencies available** : 100-470 MHz  
**Input impedance** : 50 ohms nominal  
**Maximum power** : 250 watts  
**Polarisation** : Vertical  
**Gain over  $\frac{1}{2}$  wave dipole** : Unity  
**Beamwidth** : H plane omni directional  
**Connection** : UHF series socket  
**Mounting bracket** : Clamp to fit masts up to 2" (50.8mm) in diameter  
**Elements** : 9.5mm x 7mm A1 welded tube  
**Support** : 25.4 x 3.17mm alloy tubing  
**Insulator** : Polypropylene  
**Nuts & Bolts** : Plated mild steel  
**Weight** : 3 kg approx.  
**Wind loading at 160 kph** : 1.7 kgf approx.

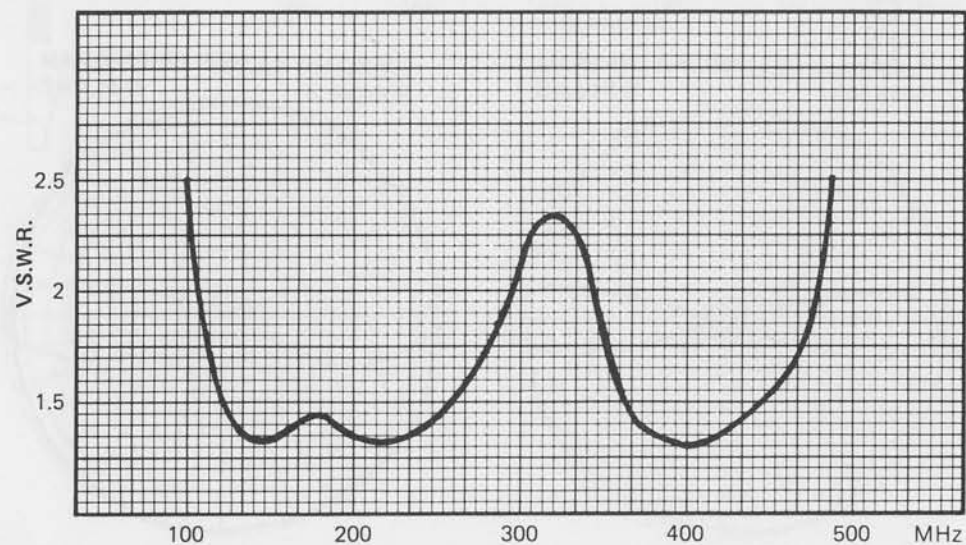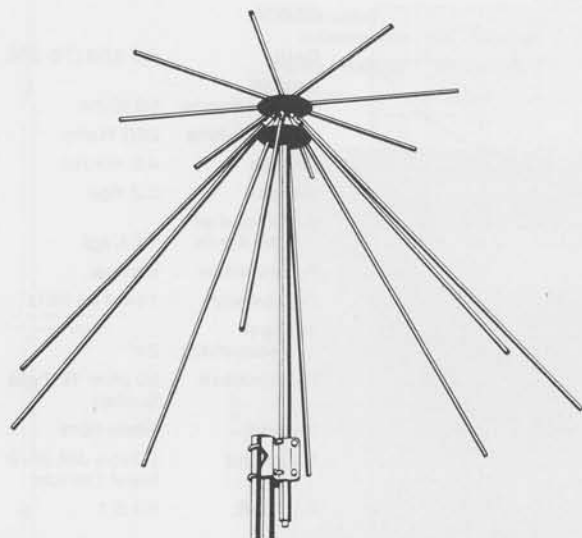


## D8/70cm

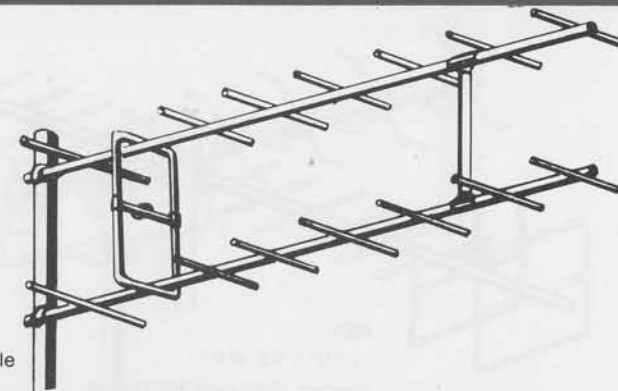

### KEY


----- V.S.W.R.  
 ————— Gain over  $\lambda/2$  Dipole

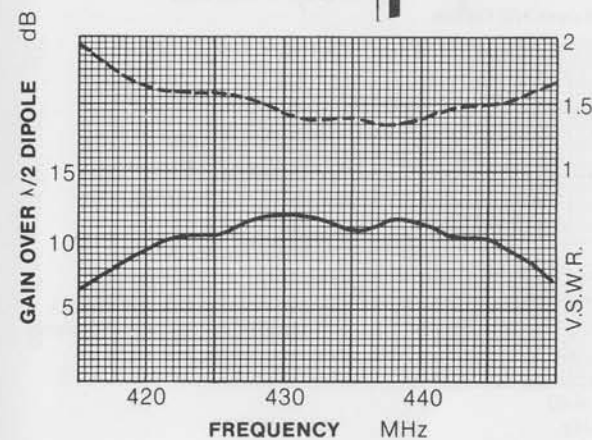


### D8/70cm

**Gain** : 12.3 dBd  
**Horizontal Beamwidth** : 45°  
**Power Rating** : 1 Kw  
**Weight** : 2.5 Kg  
**Wind load at 160 Km/h** : 10 kgf  
**Length** : 1.1 metre  
**Design Impedance** : 50 ohms

### POLAR DIAGRAM E PLANE

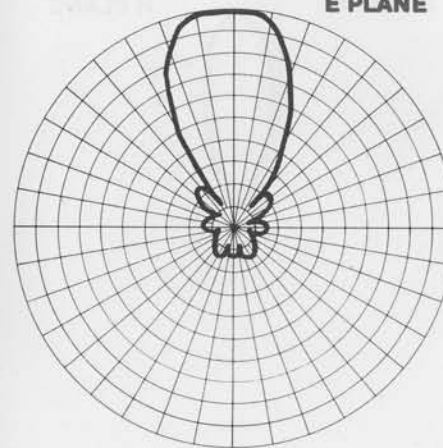

### POLAR DIAGRAM H PLANE

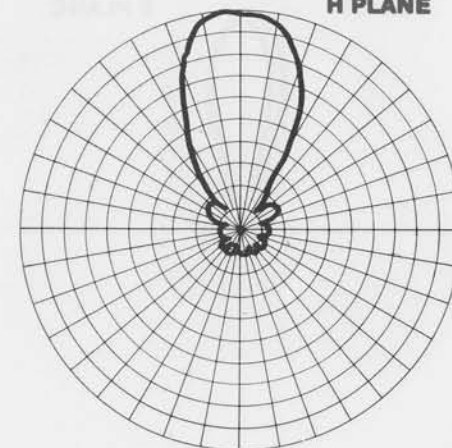




## PBM18/70cm



Downloaded by  
RadioManual.EU


KEY  
----- V.S.W.R.  
—— Gain over  $\lambda/2$  Dipole

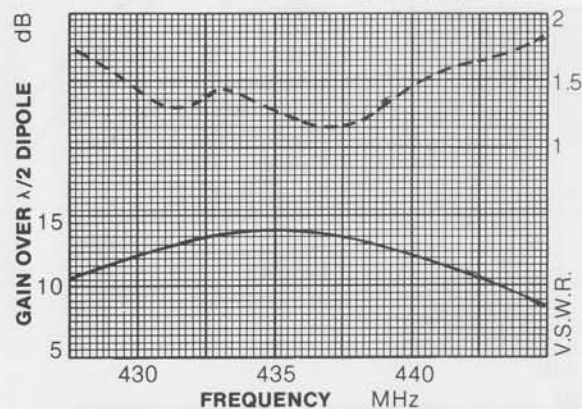


### PBM18/70cm

Gain : 14.0 dBd  
Horizontal Beamwidth : 28°  
Power Rating : 1 Kw Peak  
Weight : 3.4 Kg  
Wind load at 160 Km/h : 18 kgf  
Length : 2.8 metres  
Design Impedance : Suitable for 50 ohms or 75 ohms


POLAR DIAGRAM  
E PLANE

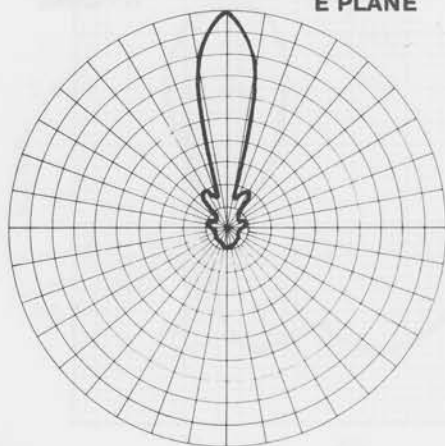


POLAR DIAGRAM  
H PLANE

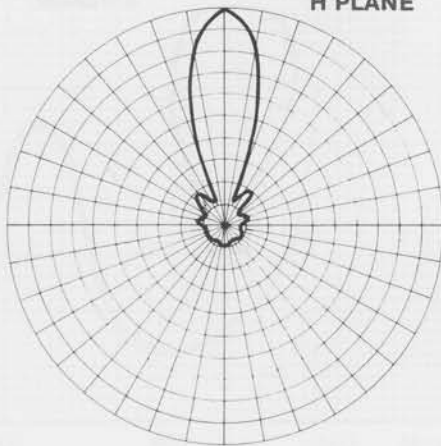

## MBM48/70cm

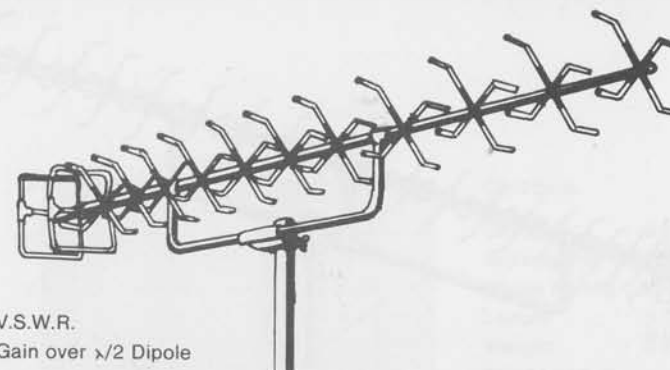


KEY  
----- V.S.W.R.  
—— Gain over  $\lambda/2$  Dipole

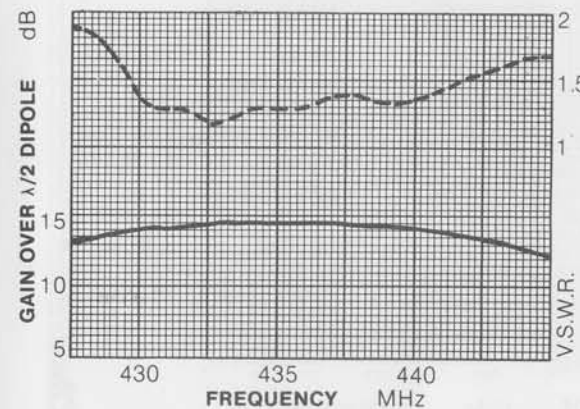


### MBM48/70cm

Gain : 14.5 dBd  
Horizontal Beamwidth : 28°  
Power Rating : 1 Kw Peak  
Weight : 2.7 Kg  
Wind Load at 160 Km/h : 17 kgf  
Length : 1.83 metres  
Design Impedance : 50 ohms


POLAR DIAGRAM  
E PLANE

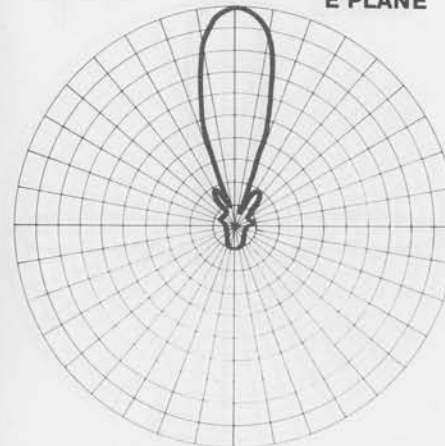

POLAR DIAGRAM  
H PLANE

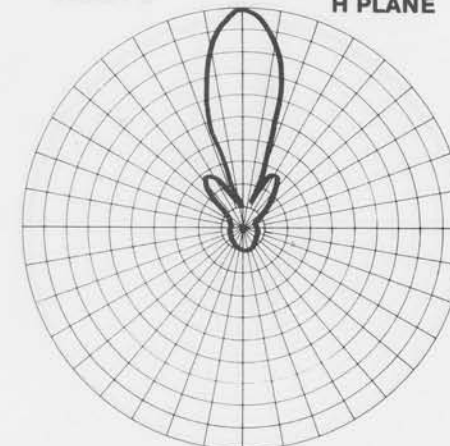


## MBM88/70cm

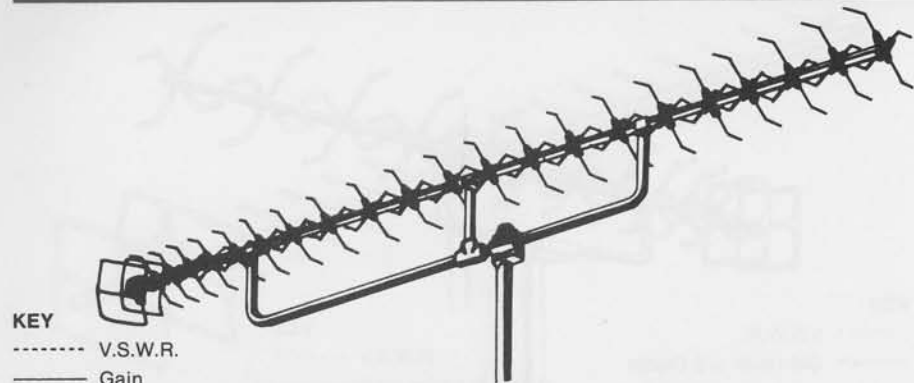

KEY

----- V.S.W.R.


— Gain

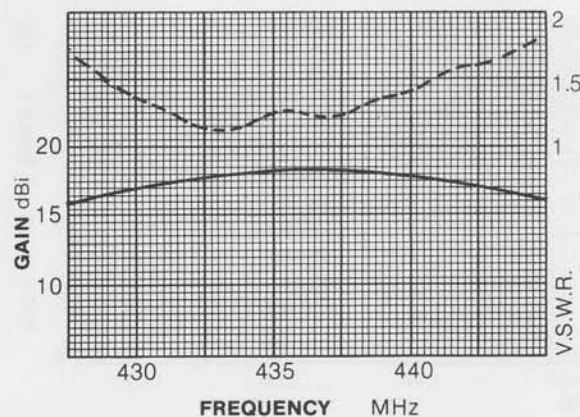


### MBM88/70cm

Gain : 18.5 dBi  
 Horizontal Beamwidth : 23°  
 Power Rating : 1 Kw Peak  
 Weight : 4.7 Kg  
 Wind Load at 160 Km/h : 32 kgf  
 Length : 3.98 metres  
 Design Impedance : 50 ohms



POLAR DIAGRAM  
E PLANE

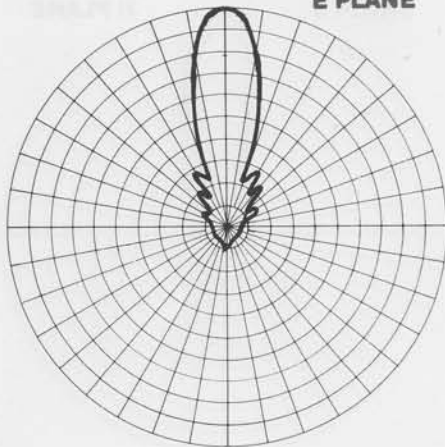

POLAR DIAGRAM  
H PLANE

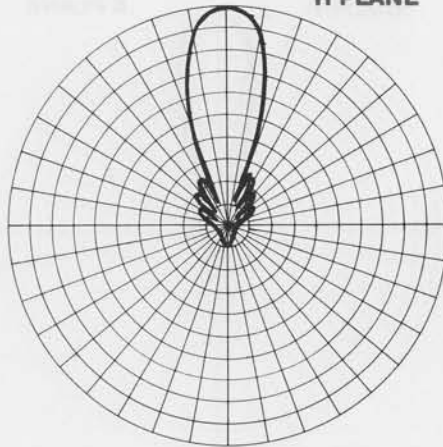


## C8/70cm

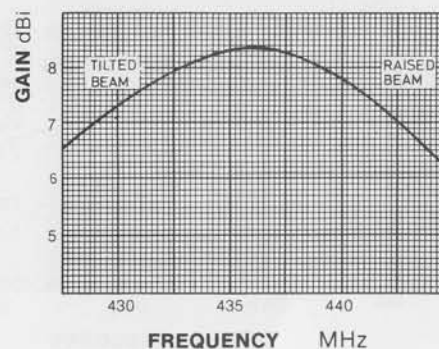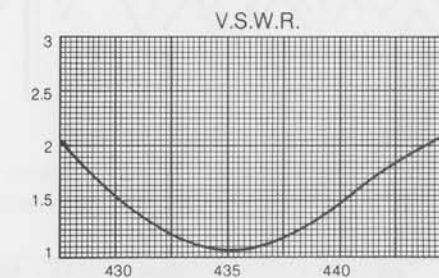


### C8/70cm

Gain : 8.2 dBi  
 Impedance : 50 ohms  
 Power Rating : 250 Watts  
 Length : 3.2 metres  
 Weight : 3.5 Kgs  
 Wind Load at 160 Km/h : 10.0 kgf  
 Polarisation : Vertical  
 Frequency : 430-440 MHz  
 Vertical Beamwidth : 12°  
 Termination : 50 ohm 'N' Type Socket  
 Shroud : Glass-fibre  
 Mounting : 2 Type JBL29/2 Steel Clamps  
 V.S.W.R. : >1.5:1

POLAR DIAGRAM  
E PLANE



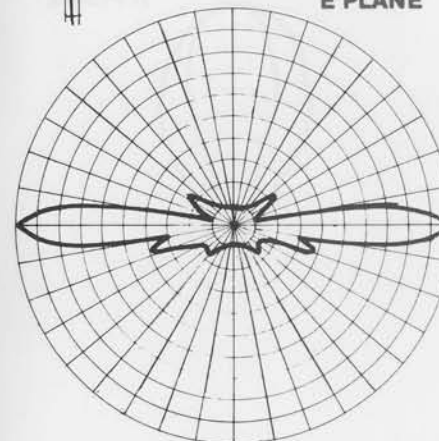


POLAR DIAGRAM  
H PLANE

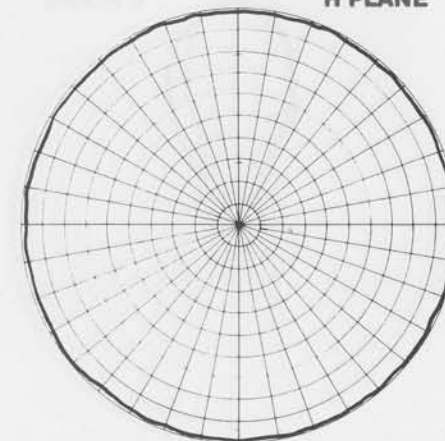



## 8XY/70cm

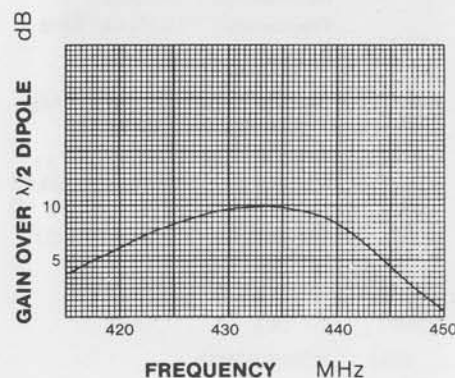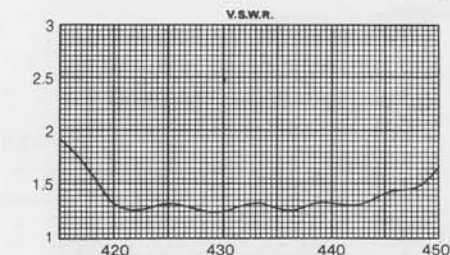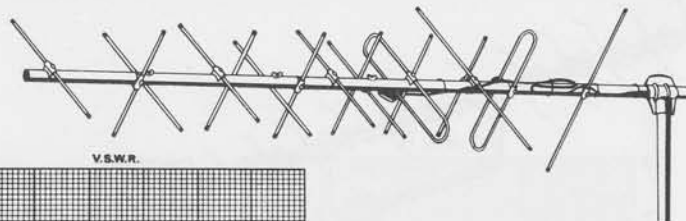

### 8XY/70cm

Gain : 10 dBd in each plane

Horizontal Beamwidth :  $47^\circ$

Power Rating : (1 Kw peak in each plane)  
(110 watts peak via harness)


Weight : 2.9 Kg

Wind Load at 160 Km/h : 18 kgf


Length : 1.505 metres

Design Impedance : 50 ohms


POLAR DIAGRAM  
E PLANE

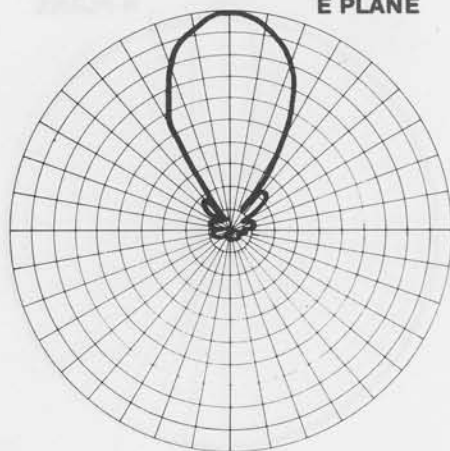

POLAR DIAGRAM  
H PLANE

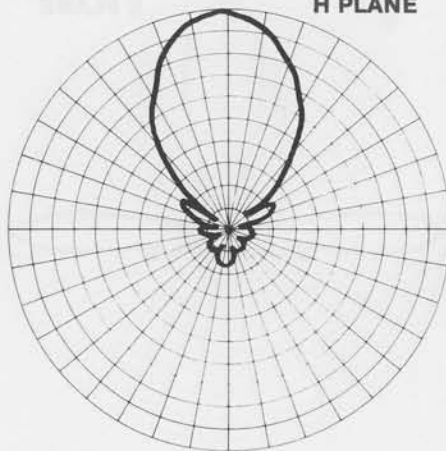


## 12XY/70cm

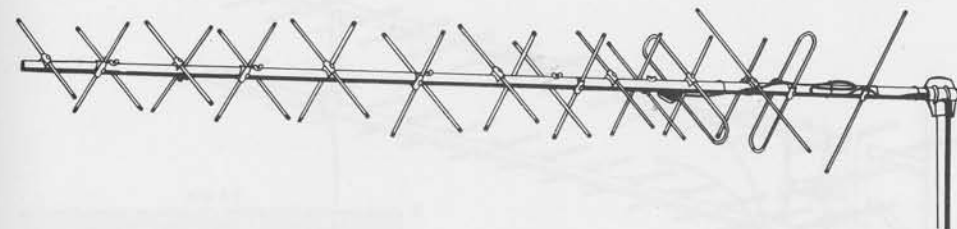

### KEY

----- V.S.W.R.

———— Gain over  $\lambda/2$  Dipole

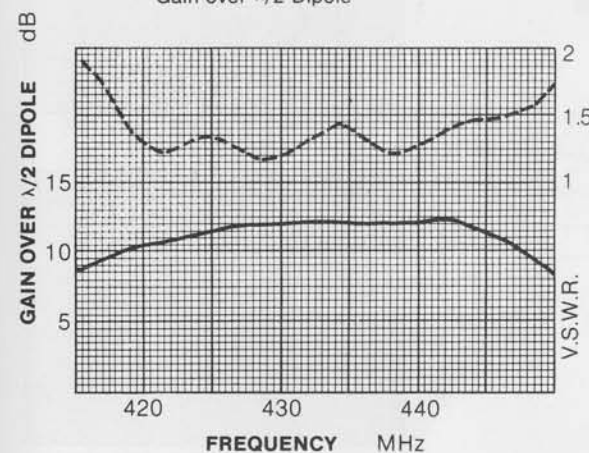

### 12XY/70cm

Gain : 12.0 dBd in each plane

Horizontal Beamwidth :  $30^\circ$

Power Rating : (1 Kw Peak in each plane)  
(110 watts peak via harness)


Weight : 3.6 Kg

Wind load at 160 Km/h : 21 kgf


Length : 2.6 metres

Design Impedance : 50 ohms


POLAR DIAGRAM  
E PLANE

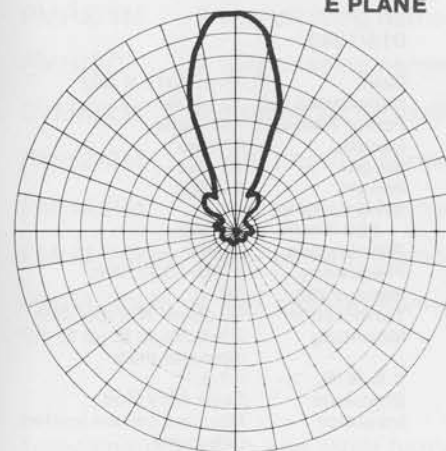


POLAR DIAGRAM  
H PLANE

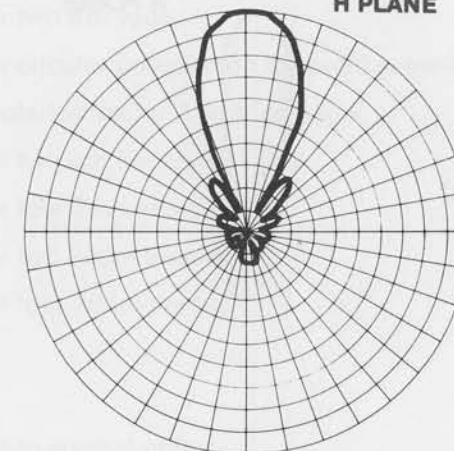






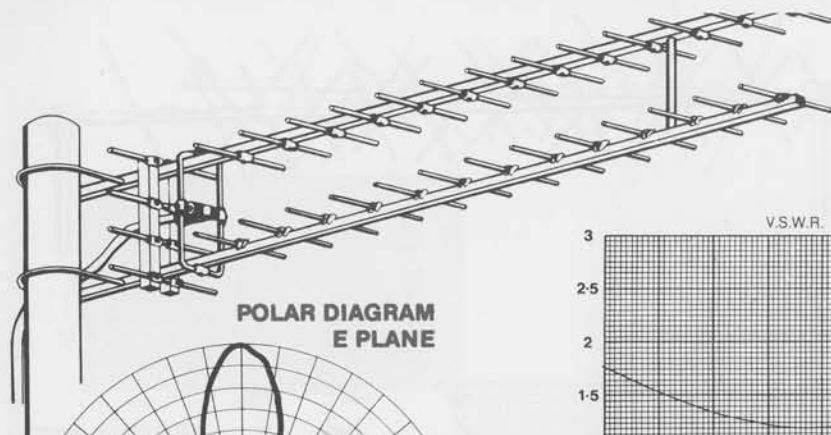

**POLAR DIAGRAM  
E PLANE**

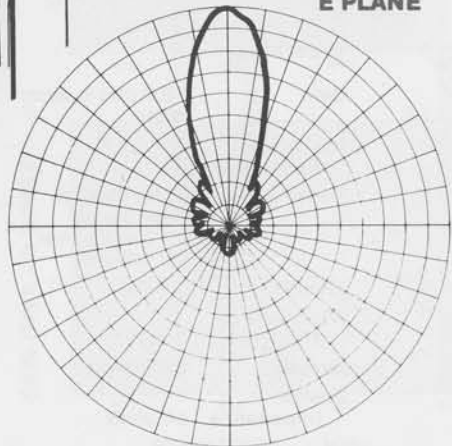

**POLAR DIAGRAM  
H PLANE**

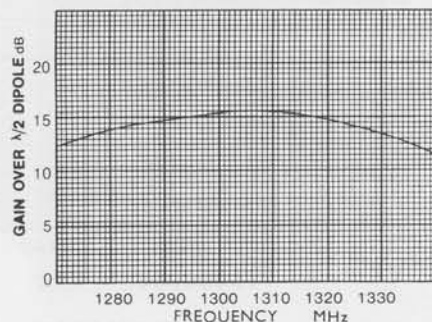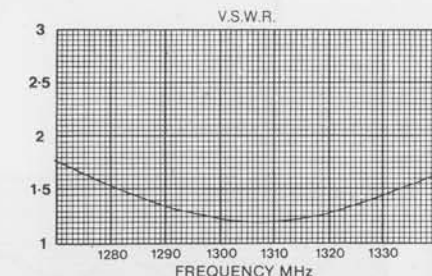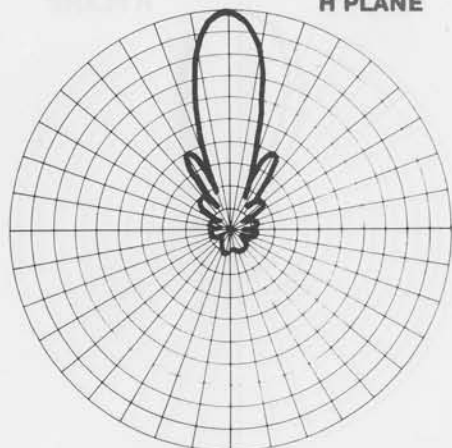

## D15/1296

Gain	: ,15 dBd (17.2 dBi)
Impedance	: 50 ohms
Power Rating	: 150 watts
Length	: 87 cms
Height	: 15 cms
Weight	: 1.2 Kgs
Wind Load at 160 Km/h	: 6.2 kgf
Polarisation	: Linear
Frequency	: 1280-1330 MHz
Beamwidth	: 28°
Termination	: 50 ohms 'N' Type Jack
Mounting	: 2 V-Bolts to fit up to a 2" diameter mast
V.S.W.R.	: <1.5:1
Elements	: Solid Alloy Rod
Insulator	: Moulded carbon loaded polythene

# PHASING HARNESSES



Two-way harness



Four-way harness

PMH2/4M	2 way phasing harness for two 4m yagis
PMH/2C	2 way phasing harness for circular polarisation for two 2m aerials
SVMK/2M	Mounting kit for vertical polarisation for 2 slot-fed yagis
PMH2/2M	2 way phasing harness for two 2m aerials
PMH4/2M	4 way phasing harness for four 2m aerials
PMH2/70cm	2 way phasing harness for two 70cm aerials
PMH4/70cm	4 way phasing harness for four 70cm aerials

Telecommunication and other harnesses to special order

# TAS



## TAS

Antenna Type	5/8 λ mobile antenna
Impedance	50 ohm
Frequency	140-175 MHz
Gain	3 dB
Polarisation	Vertical
V.S.W.R.	<1.3:1
Weight	275 gr
Mounting hole dia	24 mm

# U5/H



## U5/H

Antenna Type	U5/H mobile
Impedance	50 ohm
Frequency	430-470 MHz
Gain	5 dB
Polarisation	Vertical
V.S.W.R.	<1.3:1
Weight	450 grms
Mounting hole dia.	19 mm

---

**9502/220**

---

**ROTATOR SPECIFICATION**

Rotation Speed: 1 R.P.M.  
Gear Ratio: 3200:1  
Built-in Thrust Bearing  
Permanent Lubrication  
Preassembled Mounting Hardware included  
220 Volts, 50 Cycles A.C.  
Bracket for support mast up to 52mm (2" approx) in diameter  
Snap-open terminal door making wire connections faster and easier


**ROTOR ALIGNMENT BEARING MODEL 9523**

Provides added tough-weather protection by stabilizing antenna when installation requires giant fringe area arrays or where there are consistently heavy prevailing winds.

---

**KR400**

---

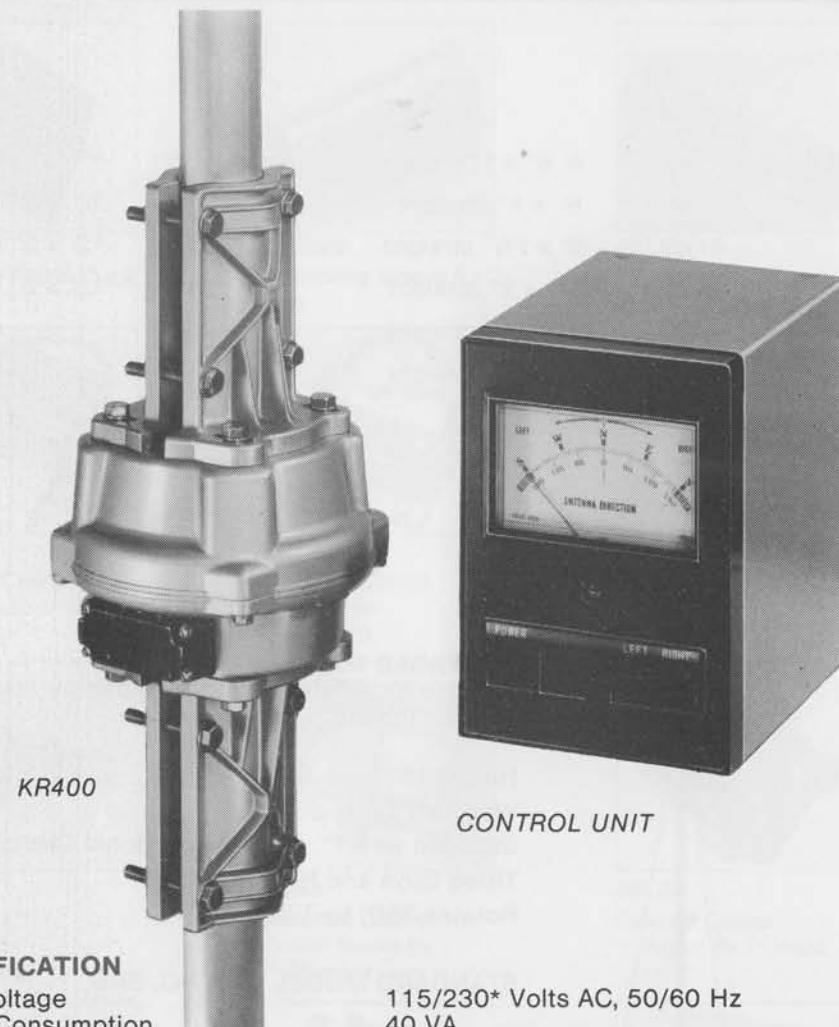

KR400

CONTROL UNIT

**SPECIFICATION**

Input voltage	115/230* Volts AC, 50/60 Hz
Power Consumption	40 VA
Motor	24 Volts, Split Phase 60 Hz
Rotation Time	Approx. 50 seconds
End-of-Rotation Stopper	Mechanical
Rotating Torque	400 Kg-cm (340 in-lbs)
Stationary Braking Torque	1500 Kg-cm (1300 in-lbs)
Vertical Load	200 Kg (440 lbs)
Permissible Mast Size	38-63 mm diameter (1½-2½")
Cable to be used	6 conductor cable
Weight	4.5 Kg (9.9 lbs)

\*State which voltage required when ordering



## MASTS

Aluminium	A4	4' 6" x 1½" straight	Steel	S6	6' x 1" straight
	A5	5' x 1" straight		S10	10' x 1½" straight
	A9	9' x 1½" straight		S12	12' x 2" straight
	A10	10' x 2" straight		S15	15' x 2" straight
	A12	12' x 2" straight			
	A14	14' x 2" straight			



### PORTABLE MAST

Suitable for amateur radio or television masts for caravans etc.

Height 16'

Weight 5 lbs (2.26 kg)

Supplied with 1" x 1" Mast to Boom Clamp

Three Guys and Pegs

Rotates 360° by Tiller Arm

STANDARD MODEL CAT. NO. SPM

4' extension for double arrays CAT No. PME

Downloaded by  
RadioManual.EU

## ACCESSORIES




**CP1**

Crossover Plate 2" x 2".



**JBL29**

Universal Clamp  
1¼" boom to 1"-2"  
mast.




**JBL58**

Shock guy  
wire clamp  
non-rotating.




**JBL65**

Diecast Clamp  
1" boom 1"-2" mast.




**JBL59/6**

6" Jointing sleeve for 2"  
mast.



**JBL30**

Universal Clamp  
1" boom to  
1"-2" mast.




**JBL63**

Universal Clamp  
1"-1¼" boom to  
1"-2" mast.




**JBL73**

Heavy duty Universal  
Clamp 1¼" boom to  
1"-2" mast.



**JBL59/15**

15" Jointing Sleeve  
for 2" Masts only.




**JBL53**

Universal Clamp  
1" boom to  
1"-2" mast.



**JBL64**


Diecast Clamp  
1" boom to 1" mast.




**MBP**

Mastbase  
plate for 2" diameter  
mast.


## MOUNTING BRACKETS

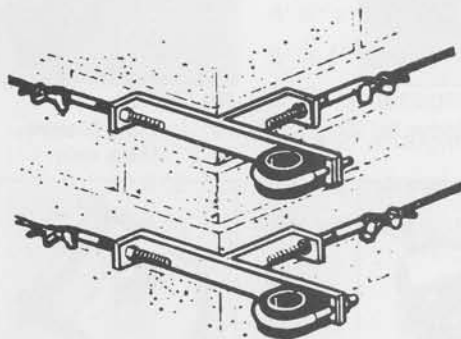


DL Double Lashing Kit

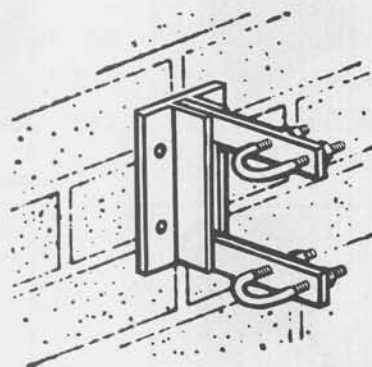

W6 6" Wall Bracket

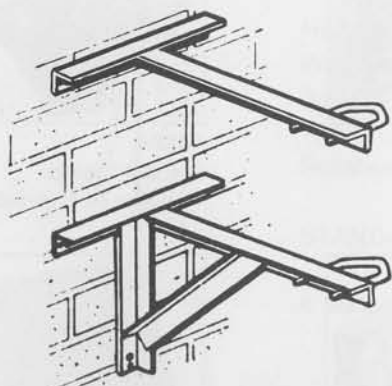

W21 21" Stand-off Bracket

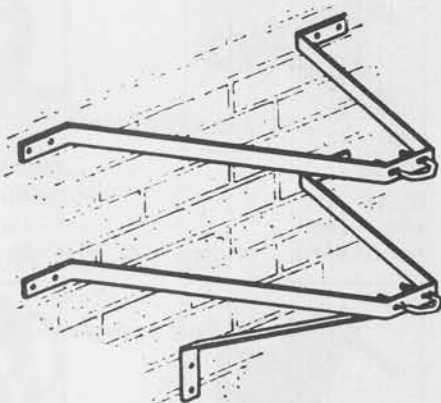

W24HD 24" Stand-off Bracket  
(Heavy Duty)

Downloaded by  
RadioManual.EU



**JAYBEAM LIMITED**

A MEMBER OF THE JONES STROUD GROUP  
NORTHAMPTON NN3 1QQ TEL (0604) 46611