

**SERVICE
MANUAL
ADDENDUM**

**ASTRO-103
TRANSCEIVER**

**MODIFICATION
TO THE
ASTRO-102BX
TRANSCEIVER**



CUBIC COMMUNICATIONS, INC.
A member of the Cubic Corporation family of companies



CUBIC COMMUNICATIONS, INC.

A member of the Cubic Corporation family of companies.

To the Service Technician:

The ASTRO-103 is an updated version of the field proven ASTRO-102BX, adding the new amateur bands designated during the 1979 World Administrative Radio Conference (WARC). The new bands are added by substitution of the bandswitch and lowpass filter assembly and by the addition of preselector and local oscillator sections corresponding to the new bands at 30, 17 and 12 meters.

In addition to the new bands, an RTTY mode has been added to the transceiver that enables the use of the optional 6 pole narrow bandwidth crystal filter while operating on the lower sideband, such as is normal in amateur radio teletype using audio frequency shift keying. Some minor changes were made in the PTO mode switching sequence in response to customer suggestions.

All other features of the ASTRO-102BX are incorporated into the ASTRO-103. It is possible to convert an ASTRO-102BX transceiver into an ASTRO-103 by the addition of the new boards and some minor modifications to the existing boards following the step by step procedure written for the ASTRO-103 conversion kit. You can perform this conversion for your customers by ordering the conversion kit.

This manual is written as an addendum to the ASTRO-102BX Service Manual to emphasize the similarity between the two transceivers. This manual is organized in exactly the same sequence as the ASTRO-102BX Service Manual, with only the significant differences between the two transceivers indicated in the addendum.

You will note that the Swan name has been dropped and only the Cubic Communications name has been retained. The organization remains dedicated to the goal of serving the needs of our customers and our service technicians throughout the world.

Sincerely,

CUBIC COMMUNICATIONS, INC.

Jess C. Wright
Jess C. Wright
President

JCW/1b

Contents

Section One	
General Information.....	1-1
Section Two	
Specifications.....	2-1
Section Three	
Receiver Theory of Operation.....	3-1
Section Four	
Transmitter Theory of Operation.....	4-1
Section Five	
Oscillator Theory of Operation.....	5-1
Section Six	
Ancillary Circuits Theory of Operation.....	6-1
Section Seven	
Servicing Hints.....	7-1
Section Eight	
Servicing Data.....	8-1
Section Nine	
Parts Lists.....	9-1

Since Cubic Communications, Inc. is constantly striving to improve its products, it reserves the right to make changes without notice or obligation.

The information contained in this document is the property of Cubic Communications, Inc. in conjunction with operating and maintaining the ASTRO-103 Transceiver. This information may not be copied, reprinted, or disclosed to a third party, either wholly or in part, without the written consent of Cubic Communications, Inc.

Entire contents c 1980 by Cubic Communications, Inc.



General Information

The Cubic Communications, Inc. (CCI) ASTRO-103 is similar to the Swan ASTRO-102BX and the CCI ASTRO-102BXA with the addition of the new bands at 30, 17, and 12 meters.

The old standard 2 pole narrow band crystal CW filter has been deleted and replaced with an optional 6 pole unit having a 6dB bandwidth of 400 Hz. Older model transceivers can be upgraded to use the new 6 pole narrow CW filter with the addition of an accessory circuit board. Newer model transceivers have space on the exciter circuit board to accommodate the optional filter.

The RTTY mode in the ASTRO-103 transceiver is useable only if the optional CW narrow filter is installed. This mode is basically LSB narrow with the position of the 400 Hz bandwidth filter controlled by the passband tuning control.

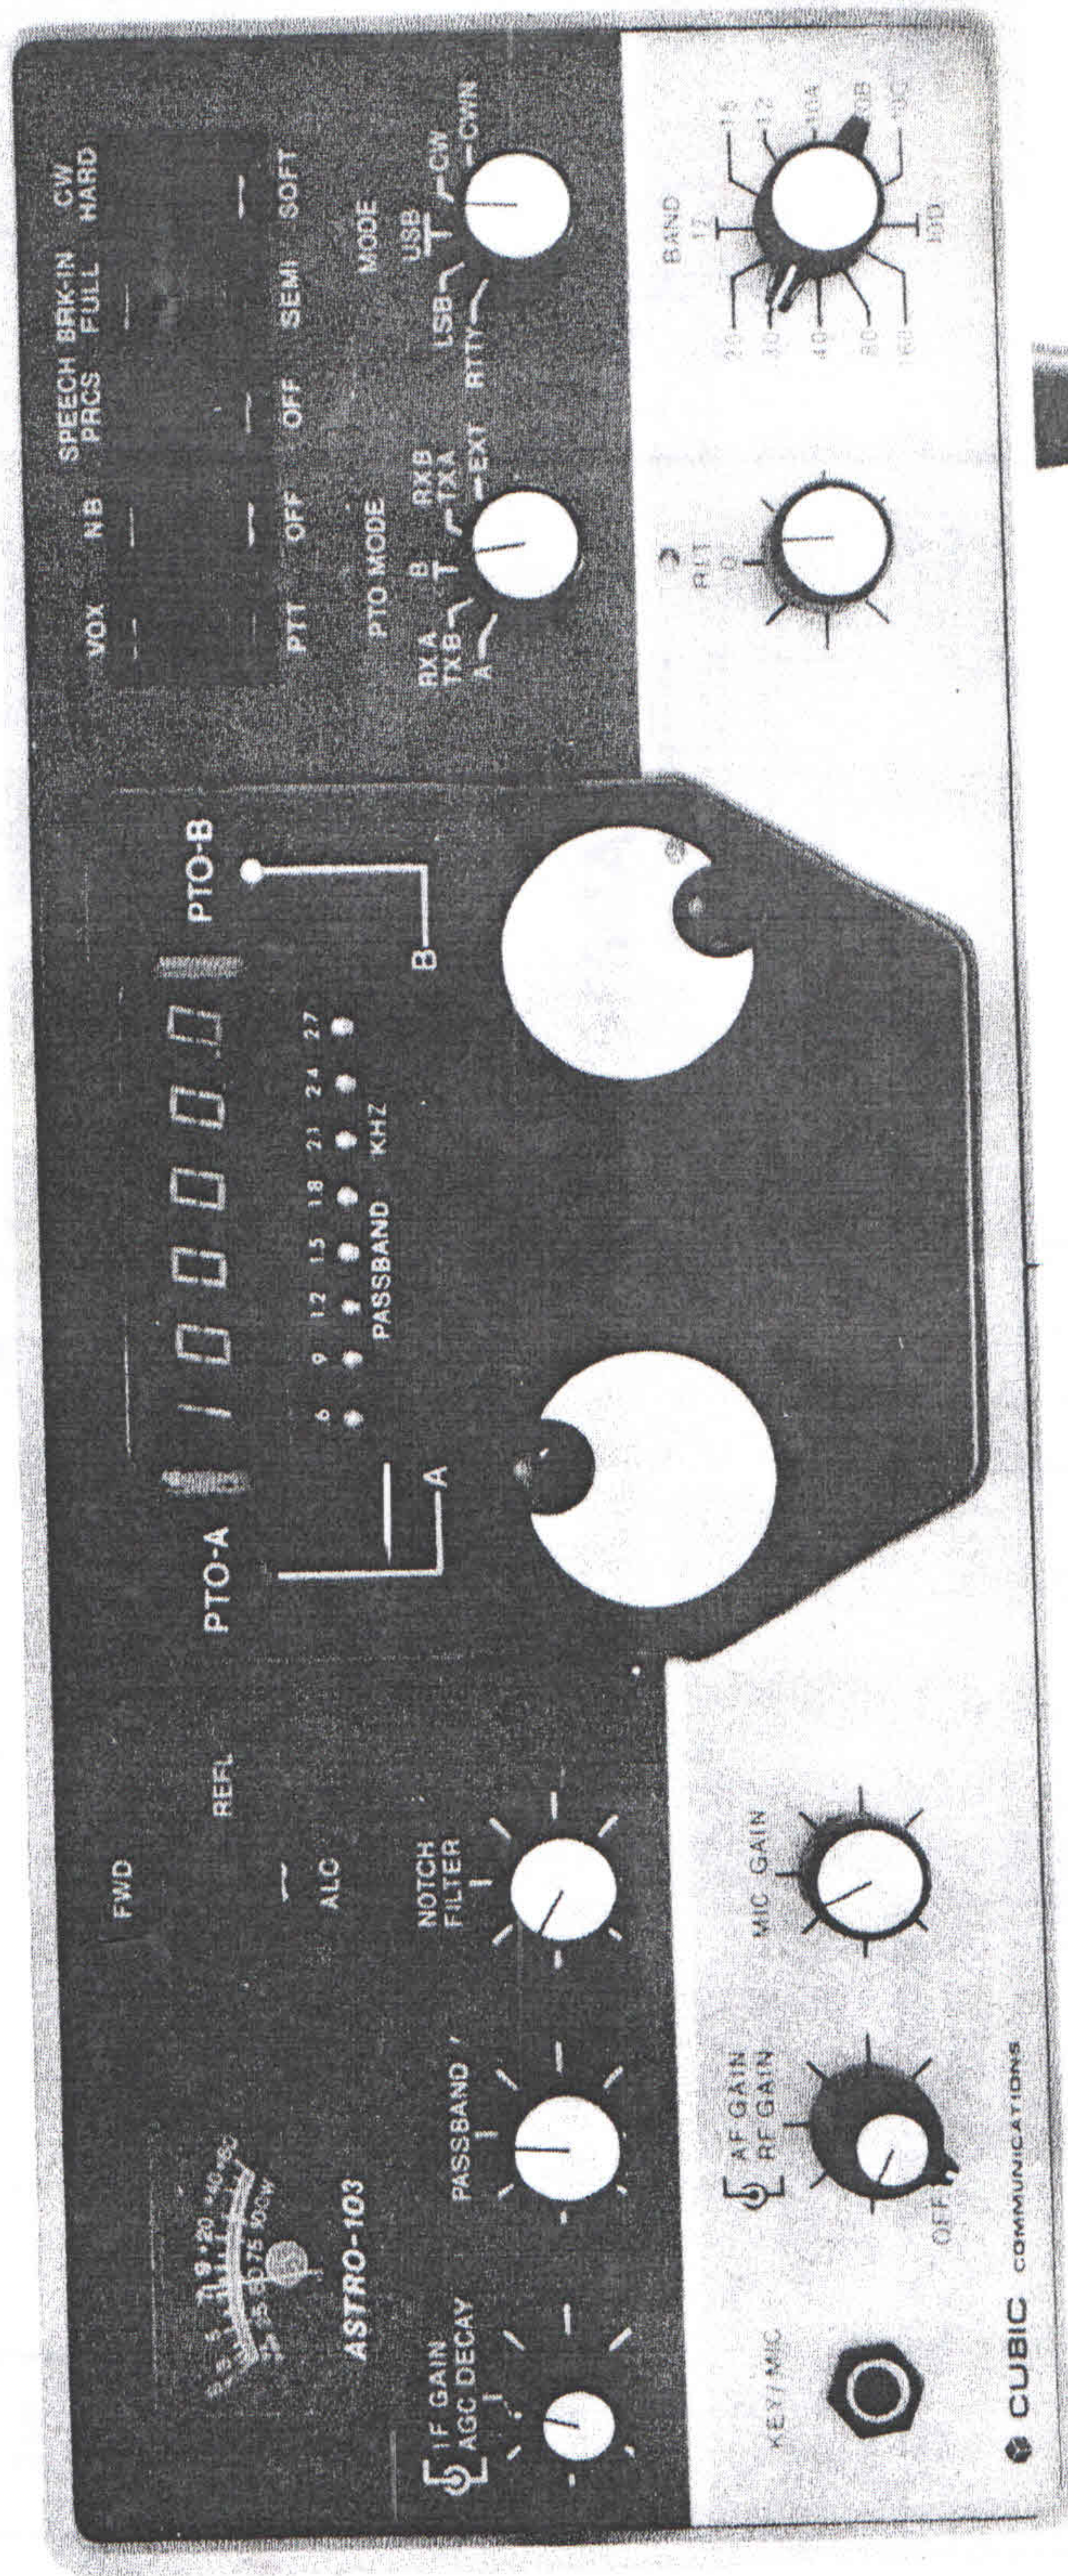


FIGURE 5-1



Specifications

GENERAL

Frequency Coverage

For the ASTRO-103, add the following bands:

30M.....10.0-10.5 MHz
17M.....18.0-18.5 MHz
12M.....24.5-25.0 MHz

Modes of Operation:

For the ASTRO-103, add the following:

CW Narrow with the optional filter
RTTY (LSB Narrow) with the optional filter

Rear Panel:

For the ASTRO-103, add the following:

Separate Receiving Antenna:	RCA Jack
Receiver Antenna Selector:	Slide Switch

RECEIVER

Receiver Selectivity:

For the ASTRO-103, change CWN to read:

CWN and RTTY--400 Hz bandwidth 6 pole crystal filter in series
with 8 pole SSB filter

Receiver Theory

Bandswitch and Low Pass Filters.....	3-2
Preselector.....	3-2
CW Narrow Filter.....	3-3



BANDSWITCH AND LOWPASS FILTER BOARD

The ASTRO-103 is similar to the ASTRO-102BX in that one of six lowpass filters is switched into the circuit in both receive and transmit conditions. The filter sections are shared on some bands, however, with the 30 and 40 meter bands utilizing one section, the 17 and 20 meter bands utilizing a second section, and the 12 and 15 meter bands sharing a third section. The component values for each filter section are somewhat modified from the values used in the ASTRO-102BX.

Receiver antenna switching is performed by relay K101 when the common or normal receive antenna selection is made on the rear panel switch added in the ASTRO-103. A second relay has been added in the ASTRO-103 to allow for use of a separate receiving antenna. The contacts on this second relay connect the antenna side of C122 (in the ASTRO-102BX schematic) to the separate receiving antenna input jack on the rear panel. The antenna selection switch on the rear panel merely selects which relay is activated by transistor Q102. The drive to shunt transistor, Q101, has been slightly modified in the ASTRO-103 to eliminate any slight delay in the opening of either relay. Otherwise the operation of this circuitry is similar in both transceivers.

The band control wafer, S103, on the bandswitch has been modified to provide additional band control lines. In order to preserve the wiring in the ASTRO-102BX transceivers being upgraded to the ASTRO-103 configuration, the control information for the three additional bands has been brought out through a separate connector for use elsewhere in the transceiver.

Refer to the schematic diagram for the lowpass filter board provided with the manual addendum for additional information.

PRESELECTOR

The preselector section in the ASTRO-103 transceiver operates in a similar fashion as the preselector section in the ASTRO-102BX. A second preselector board (Auxiliary Preselector) is mounted above the original preselector board to accommodate the three new bands with a coaxial cable interconnection between the boards. Switching of selected bands is performed by the control lines originating at S103 as before. Refer to the schematic diagrams for the Preselector and Auxiliary Preselector boards provided with this addendum.



BANDSWITCH AND LOWPASS FILTER BOARD

The ASTRO-103 is similar to the ASTRO-102BX in that one of six lowpass filters is switched into the circuit in both receive and transmit conditions. The filter sections are shared on some bands, however, with the 30 and 40 meter bands utilizing one section, the 17 and 20 meter bands utilizing a second section, and the 12 and 15 meter bands sharing a third section. The component values for each filter section are somewhat modified from the values used in the ASTRO-102BX.

Receiver antenna switching is performed by relay K101 when the common or normal receive antenna selection is made on the rear panel switch added in the ASTRO-103. A second relay has been added in the ASTRO-103 to allow for use of a separate receiving antenna. The contacts on this second relay connect the antenna side of C122 (in the ASTRO-102BX schematic) to the separate receiving antenna input jack on the rear panel. The antenna selection switch on the rear panel merely selects which relay is activated by transistor Q102. The drive to shunt transistor, Q101, has been slightly modified in the ASTRO-103 to eliminate any slight delay in the opening of either relay. Otherwise the operation of this circuitry is similar in both transceivers.

The band control wafer, S103, on the bandswitch has been modified to provide additional band control lines. In order to preserve the wiring in the ASTRO-102BX transceivers being upgraded to the ASTRO-103 configuration, the control information for the three additional bands has been brought out through a separate connector for use elsewhere in the transceiver.

Refer to the schematic diagram for the lowpass filter board provided with the manual addendum for additional information.

PRESELECTOR

The preselector section in the ASTRO-103 transceiver operates in a similar fashion as the preselector section in the ASTRO-102BX. A second preselector board (Auxiliary Preselector) is mounted above the original preselector board to accommodate the three new bands with a coaxial cable interconnection between the boards. Switching of selected bands is performed by the control lines originating at S103 as before. Refer to the schematic diagrams for the Preselector and Auxiliary Preselector boards provided with this addendum.



CWN FILTER

The 2 pole CWN filter provided with the ASTRO-102BX has been deleted in the ASTRO-103. A 6 pole filter is available as an option. On early model transceivers, the 6 pole filter is mounted on an auxiliary circuit board above the area formerly containing the 2 pole filter. Late model transceivers utilize a circuit board having provisions for drop-in mounting of the 6 pole filter.

Transmitter Theory

All transmitter circuitry in the ASTRO-103 is identical to that in the ASTRO-102BX with the exception of the Preselector Bandpass Filters. As in the ASTRO-102BX, the identical filters are used in both receive and transmit.

Oscillator Theory

Band Voltage Controlled Oscillators.....	5-2
Local Oscillator Mixer.....	5-2



BAND VOLTAGE CONTROLLED OSCILLATORS

The band voltage controlled oscillators in the ASTRO-103 transceiver are essentially identical to those in the ASTRO-102BX. An Auxiliary Local Oscillator board is mounted above the Local Oscillator board to provide space for the oscillators used on the added bands with a coaxial cable interconnection between the two boards to couple the oscillator output.

The programming of counters U102 and U103 is accomplished in a similar manner in the two transceivers except the programmable read only memory (PROM) U105 is modified for the ASTRO-103. Previously unused states in the PROM are programmed to the desired conditions corresponding to the new bands. Late model ASTRO-102BXA transceivers are shipped with the PROM corresponding to either the ASTRO-102BX or ASTRO-103 configurations. This part can be recognized by the CCI part number marked on the top of U105 -- if the number is 478-012 it is suitable for an ASTRO-103, if the number is 478-008 it is suitable only for an ASTRO-102BX.

Some changes are made in the steering of the band control lines as shown in the schematic diagram on page 5-2 of the ASTRO-102BX Service Manual. The diode matrix shown in this diagram is replaced with a similar matrix on the Auxiliary L.O. board with provisions for the three additional bands. The output of the matrix is then wired to U105 using a 5 wire cable.

The outputs of the D.C. Error Amplifiers are brought up to the Auxiliary L.O. board to control the oscillators. The 12 meter oscillator utilizes the 10 meter error line while the 30 and 17 meter oscillators utilize the 160-15 meter error line.

The schematic diagrams for the Auxiliary L.O. and the L.O. board with the ASTRO-103 modification are included with this manual. Refer to these schematic diagrams for additional details.

LOCAL OSCILLATOR MIXER

The Auxiliary L.O. board also contains a set of three bandpass filters to accommodate the L.O. signal for the three new bands. The circuits are similar to those on the L.O. board with circuit selection performed by the band control lines.

In addition to the band VCOs, diode matrix and the bandpass filters, the Auxiliary L.O. board contains circuitry and connectors to properly interconnect all modules utilizing the band control signals. Refer to the schematic diagrams and main interconnect diagram for complete details.

Ancillary Circuits

FREQUENCY COUNTER

The frequency counter circuitry in the ASTRO-103 is modified to accommodate primarily the 30 meter band. As can be seen from the description in the ASTRO-102BX Service Manual, the most significant digit in the frequency display is controlled by external gating operating on the band control lines. The control wiring to the frequency counter is intercepted on the Auxiliary L.O. board in order to add the additional gating for the 30, 17, and 12 meter bands.

The problem with the 30 meter band, however, is that the most significant digit would be a 1 above 10 MHz and a 0 below 10 MHz. An external gating signal could not perform this function. An Auxiliary Counter circuit board is thus installed internally to the counter enclosure to sense the above or below 10 MHz condition. The most significant digit is thus controlled correctly on the 30 and 20 meter bands. All other bands have the most significant digit controlled directly by the band control lines.



Servicing Hints

The ASTRO-103 represents an addition to the capability and features of the ASTRO-102BX but utilizes the same type of circuitry and components. Consequently, no change in the text of this section is required. The following additional note, however, can be applied to both the ASTRO-102BX and the ASTRO-103.

PASSBAND TUNING

An analysis of the filter response curves shown in the passband tuning section in the ASTRO-102BX Service Manual will show that one edge of the overall response curve will remain fixed in frequency while the opposite edge can be varied by using the PASSBAND TUNING control. A clockwise rotation of the control from the mid position will hold the upper edge fixed while varying the lower edge. Conversely, a counter-clockwise rotation of the control will hold the lower edge fixed while varying the upper edge. In this manner, the overall bandwidth can be varied and can be used to eliminate interference near one corner or the other of the filter response curve.

A comparison with amateur transceivers from other manufacturers will sometimes reveal that the function called passband tuning by some manufacturers would be better described as IF shift. The function is sometimes known by that name. The IF shift function merely moves the same filter bandwidth over a small range of frequencies. Although an interfering signal occurring near one edge of the normal response band could be eliminated with this method, the shift of the overall band could introduce interference from signals near the opposite edge. Note that the passband tuning function, as implemented in the ASTRO-102BX and ASTRO-103 transceivers, requires a second crystal filter, two mixers and a front panel controllable oscillator, while the much less effective IF shift function only requires a method of varying the beat frequency oscillator and tuning oscillator together from a front panel control.




CUBIC COMMUNICATIONS, INC.

AUXILIARY PRESELECTOR BANDPASS FILTER ALIGNMENT TABLE

<u>BAND</u>	<u>RANGE, MHz</u>	<u>CENTER FREQ</u>	<u>COILS</u>
30	10.0-10.5	10.250	T207, T208, T209
17	18.0-18.5	18.250	T204, T205, T206
12	24.5-25.0	24.750	T201, T203, T203

AUXILIARY L.O. BANDPASS FILTER ALIGNMENT TABLE

<u>BAND</u>	<u>RANGE, MHz</u>	<u>CENTER FREQ</u>	<u>COILS</u>
30	19.0-19.5	19.250	T210, T211, T212
17	27.0-27.5	27.250	T207, T208, T209
12	33.5-34.0	33.750	T204, T205, T206

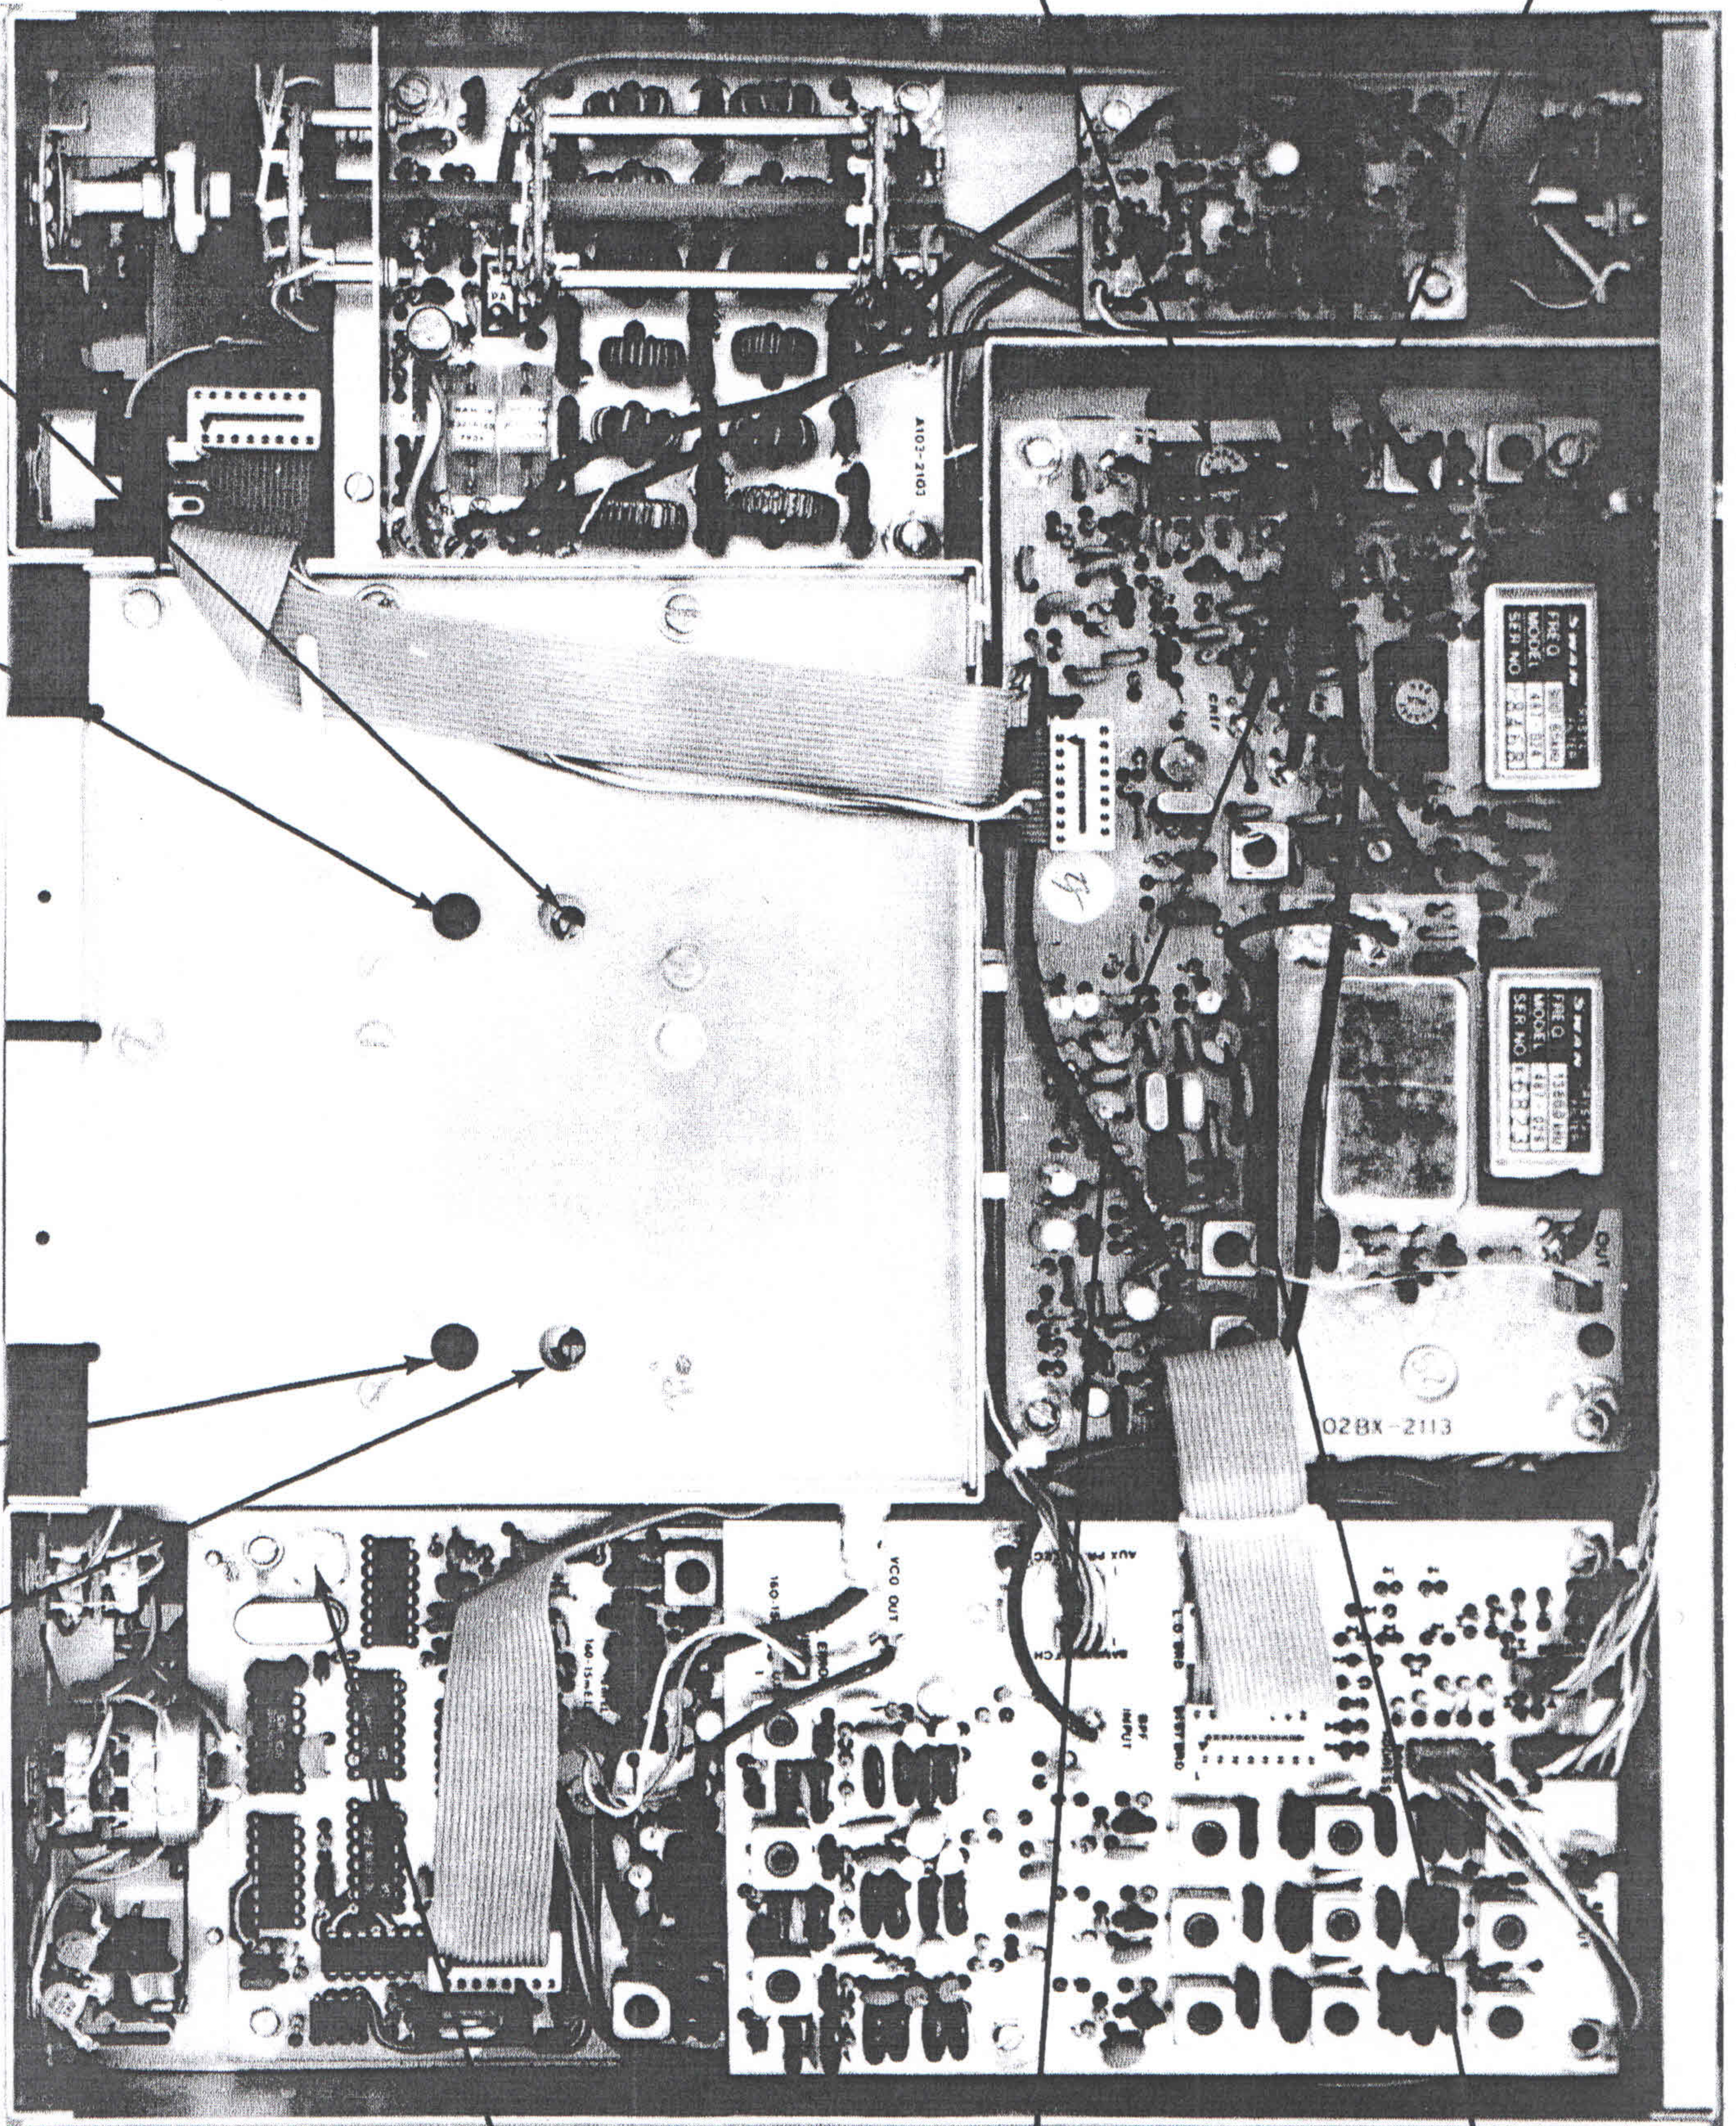

C2197

Z2101

C2194

C2199

C5246

C7606
[B]

C7608
[B]

C7608
[A]

C7606 [A]

FIGURE 8-2
BOTTOM VIEW



Parts

Low Pass Filter/Band Switch Board (3000 Series).....	9-2
Auxiliary Local Oscillator Board (5200 Series).....	9-3
Front Panel Right Board (7800 Series).....	9-2
Auxiliary Preselector Board (8000 Series).....	9-4

Only parts unique to the ASTRO-103 are listed in this section. When referring to the parts lists for the ASTRO-102BX, the Lowpass Filter/Band Switch and the Front Panel, Right boards are replaced in their entirety. The Auxiliary Preselector, Auxiliary L.O. and Auxiliary Counter boards are new boards used only in the ASTRO-103.

LOWPASS FILTER/BANDSWITCH BOARD (3000 Series)

Changes for the ASTRO-103 Only

Circuit Symbol	Cubic Part Number	Description
K3102	111-036	Relay, Reed SPST
L3107	027-081	Coil, RF, 1.15 uH, 14T (30, 40 Meters)
L3108	027-081	Coil, RF, 1.15 uH, 14T (30, 40 Meters)
L3111	027-098	Coil, RF, 6.4 uH, 33T (160 Meters)
L3112	027-098	Coil, RF, 6.4 uH, 33T (160 Meters)
S3101	171-205	Switch Wafer
S3102	171-205	Switch Wafer
S3103	171-205	Switch Wafer

FRONT PANEL, RIGHT BOARD (7800 Series)

Changes for the ASTRO-103 Only

Circuit Symbol	Cubic Part Number	Description
S7802	171-188	Switch, Mode



AUXILIARY L.O. BOARD (5200 Series)

ASTRO-103 Only - Other parts similar to L.O. Board on ASTRO-102BX

Circuit Symbol	Cubic Part Number	Description
T5201	012-231	Transformer, RF 6T
T5202	014-066	Transformer, RF, 8T
T5203	012-255	Transformer, RF, 9T
T5204	014-066	Transformer, RF, 8T
T5205	014-067	Transformer, RF, 14T
T5206	014-066	Transformer, RF, 8T/12T
T5207	014-066	Transformer, RF, 8T
T5208	014-067	Transformer, RF, 14T
T5209	014-066	Transformer, RF, 8T/12T
T5210	014-066	Transformer, RF, 8T
T5211	014-067	Transformer, 14T
T5212	014-066	Transformer, RF, 8T/12T
L5201	027-059	RF Choke 1.5 uH
L5202	027-059	RF Choke 1.5 uH
L5203	027-060	RF Choke 1.8 uH
L5204	027-060	RF Choke 1.8 uH
L5205	027-062	RF Choke 2.7 uH
L5206	027-062	RF Choke 2.7 uH
U5105	476-012	PROM with code for ASTRO-103 Used on L.O. Board, replaces 476-008

AUXILIARY PRESELECTOR BOARD (8200 Series)

ASTRO-103 Only - Other parts similar to Preselector Board on ASTRO-102BX

Circuit Symbol	Cubic Part Number	Description
L8201	012-269	Coil, RF 7 uH, 40T
L8202	012-269	Coil, RF 17 uH, 40T
C8218	089-028	Capacitor, Trimmer 4-30 pf
C8219	089-028	Capacitor, Trimmer, 4-30 pf
T8201	014-066	Transformer, RF, 8T/2T
T8202	014-067	Transformer, RF, 14T/3T
T8203	014-066	Transformer, RF 8T/2T
T8204	014-067	Transformer, RF 14T/3T
T8205	014-068	Transformer, RF 20T/3T
T8206	014-068	Transformer, RF 20T/3T
T8208	014-069	Transformer, RF, 32T/9T
T8209	014-068	Transformer, RF 20T/3T