

Kenwood TS-870S MF/HF Transceiver

Reviewed by Larry Wolfgang, WR1B
Senior Assistant Technical Editor

With the introduction of the TS-870S, Kenwood helps usher in a new era in Amateur Radio equipment design. As do the latest offerings from ICOM and Yaesu, Kenwood's newest MF/HF transceiver includes digital signal processing (DSP) at IF, but with a difference. Kenwood's competitors take the belt-and-suspenders approach and couple crystal filters (both standard and optional) with DSP on their latest radios, but the TS-870S requires *no* additional crystal filters to supplement its DSP. It's the first radio in its class to make that claim.

To better understand how the TS-870S implements DSP at HF, see the sidebar "DSP in the Kenwood TS-870S."

Features

The TS-870S's attractive but no-nonsense front panel has the complement of controls you would expect on any full-featured HF rig. But, not all of this radio's goodies are obvious at first glance. The prominent main tuning knob has a soft-rubber grip that provides a comfortable feel and a handy finger depression to spin up or down the band. You can set the tuning steps to 5 or 10 kHz per revolution. The **FINE** tuning button divides this value by 10 when it is turned on, but you cannot display the 1 Hz units to go along with the fine tuning steps. With the small tuning steps, the radio sounds almost "analog" as you tune. None of that digital warbling as the VFO changes frequency!

Two groups of four controls apiece (some of them concentric) flank the tuning knob and give ready access to the most-used functions. Better yet, the knobs and associated pushbuttons are substantial enough for even the most fumble-fingered ops to get a grip on them.

To the left of the main tuning knob, one set of concentric controls adjusts the built-in electronic keyer speed and AGC attack speed. Turning the **AGC** knob fully counter-clockwise turns off the AGC; there is no detent or other tactile response to let you know when the AGC is off, so you'll have to look on the display for the red AGC legend above the main frequency readout. Other concentric controls in this group set the speech processor and monitor volume levels, adjust CW, AM or FSK carrier level (or SSB output with the speech processor on), set VOX delay, and adjust microphone gain



and power output level.

Convenient pushbuttons just above these knobs select the transmit metering function (options are ALC, SWR, compression level and output power) and activate the speech processor and monitor function.

The right-hand group of controls includes single-knob controls for **RIT/XIT** and **M.CH/VFO.CH** (to change the memory channel or VFO channel), plus concentric controls to set **AF** or **RF** level and **NB** (noise blanker) and **SQL** (squelch). A **CLEAR** pushbutton quickly zeros the incremental tuning. As you adjust the RIT, the main frequency display also changes to show the actual receive frequency.

The display window conveys plenty of information about the radio's operating status. Is the AGC on? How about the speech processor? The automatic antenna tuner? All these questions and more are easily answered at a glance. For example, one spot in the display window shows DSP filter high or low-frequency limits for phone modes, filter bandwidth for FSK and filter center frequency or bandwidth for CW. This information shares display space with RIT or XIT tuning increment data, as well as with the transmit frequency in split.

The left side of the display window is a digital LCD representation of an analog

meter—complete with an arc. In receive, the top of the display is an S meter. In transmit, the same segments indicate output power. In receive, the lower portion of the display graphically indicates current filter bandwidth and relative frequency shift. This portion of the display lacks numbers, so you can't tell the *exact* filter settings. For that information, you'll have to look at the right side of the display window (and you may have to first turn the appropriate filter-select knob to activate the readout). In transmit, this same meter section displays SWR, ALC or speech compression level. Turning on the **P HOLD** menu selection holds peak readings on both bar graphs for about 2.5 seconds.

Most users liked the display window and its colorful legends. The bright, white main display numerals are about a half-inch high and easy to read. Red labels above the frequency display indicate active functions, such as **AGC**, **MONITOR** and speech **PROCESSOR**. Yellow labels below the frequency display indicate the active mode. One reviewer commented that the unlighted LED segments remain distractingly visible behind the display window lens. A darker display-window lens could lessen the effect.

The **ANT** button selects between two rear-panel antenna connectors. **ATT UP** and **DOWN** buttons select either 0, 6, 12 or 18 dB of receive attenuation. **AIP** (Advanced Intercept Point)—also available with the touch of a button—helps to reduce intermodulation distortion by throttling back the sensitivity. On a band crowded with strong signals, you'll likely want to leave **AIP** on.

Getting Around with the '870S

The '870S has two VFOs plus 100

Bottom Line

The first DSP transceiver without standard or optional narrow crystal IF filters, the TS-870S offers fine receive and transmit audio, noteworthy selectivity and comfortable controls. A snazzy computer-control program and interface are standard.

Table 1**Kenwood TS-870, serial no. 70500128****Manufacturer's Claimed Specifications**

Frequency coverage: Receive, 100 kHz-30 MHz; transmit, 1.8-2; 3.5-4; 7-7.3; 10.1-10.15; 14-14.35; 18.068-18.168; 21-21.45; 24.89 -24.99; 28-29.7 MHz.

Modes of operation: USB/LSB, CW, AM, FM, FSK

Power requirement: Receive, 2 A (no signal); transmit, 20.5 A (max).

Receiver

SSB/CW sensitivity, bandwidth not specified, 10 dB (S+N)/N: 100-500 kHz, $\leq 1 \mu\text{V}$; 500 kHz-1.7 MHz, $\leq 4 \mu\text{V}$; 1.7-24.5 MHz, $\leq 0.2 \mu\text{V}$; 24.5-30 MHz, $\leq 0.13 \mu\text{V}$.

AM sensitivity, 10 dB (S+N)/N, bandwidth not specified: 100-500 kHz, $\leq 2 \mu\text{V}$; 0.5-1.7 MHz, $\leq 32 \mu\text{V}$; 1.7-30 MHz, $\leq 2 \mu\text{V}$.

FM sensitivity, 12 dB SINAD: 28-30 MHz, $\leq 0.25 \mu\text{V}$.

Blocking dynamic range: Not specified.

Two-tone, third-order IMD dynamic range: Not specified.

Third-order input intercept: Not specified

Second-order intercept point: Not specified

FM adjacent channel rejection: Not specified

FM two-tone, third-order IMD dynamic range: Not specified

S-meter sensitivity: Not specified

Squelch sensitivity: Not specified

Receiver audio output: 1.5 W at 10% THD into 8 Ω .

IF/audio response: Not specified.

Notch filter depth: 40 dB or more.

Spurious and image rejection: 80 dB or better.

IF rejection: 80 dB or better.

Transmitter

Power output: SSB, CW, FSK, FM, 100 W (max), 20 W or less (min), continuously adjustable. AM, 25 W (max), 20 W or less (min), continuously adjustable.

Spurious-signal and harmonic suppression: 60 dB or more.

SSB carrier suppression: 50 dB or more.

Undesired sideband suppression: 50 dB or more.

Third-order intermodulation distortion (IMD) products: Not specified.

CW keyer speed range: 6-60 wpm.

CW keying characteristics: Not specified.

Transmit-receive turnaround time (PTT release to 50% audio output): Not specified.

Receive-transmit turnaround time ("tx delay"): 15 ms.

Composite transmitted noise: Not specified.

Size (height, width, depth): 4.7x13x13 inches; weight, ≈ 25 pounds.

Note: Dynamic range measurements were made at the ARRL Lab standard signal spacing of 20 kHz.

*Measurement was noise-limited at the value indicated.

Measured in the ARRL Lab

Receive, 30 kHz to 30 MHz; transmit, as specified

As specified.

Receive, 2 A (no signal); transmit, 16.5 A (max), tested at 13.8 V.

Receiver Dynamic Testing

Minimum discernible signal (noise floor), 400 Hz **WIDTH** and 700 Hz **SHIFT**:

	<i>Preamp off</i>	<i>Preamp on</i>
1.0 MHz	-108 dBm	-117 dBm
3.5 MHz	-131 dBm	-141 dBm
14 MHz	-129 dBm	-139 dBm

10 dB (S+N)/N, 1-kHz tone, 30% modulation, 6 kHz **WIDTH**:

	<i>Preamp off</i>	<i>Preamp on</i>
1.0 MHz	35 μV (-76 dBm)	11 μV (-86 dBm)
3.8 MHz	2.3 μV (-100 dBm)	0.7 μV (-110 dBm)

For 12 dB SINAD, 14-kHz bandwidth:

	<i>Preamp off</i>	<i>Preamp on</i>
29 MHz	0.9 μV (-108 dBm)	0.16 μV (-123 dBm)

Blocking dynamic range, 400 Hz **WIDTH**:

	<i>Preamp off</i>	<i>Preamp on</i>
1.0 MHz	128 dB*	124 dB
3.5 MHz	127 dB*	124 dB
14 MHz	127 dB	123 dB

Two-tone, third-order IMD dynamic range, 400 Hz **WIDTH**:

	<i>Preamp off</i>	<i>Preamp on</i>
1.0 MHz	83 dB	89 dB
3.5 MHz	99 dB	95 dB
14 MHz	97 dB	95 dB

	<i>Preamp off</i>	<i>Preamp on</i>
1.0 MHz	+17 dBm	+17 dBm
3.5 MHz	+18 dBm	+2 dBm
14 MHz	+16 dBm	+4 dBm

Preamp off, +63 dBm; preamp on, +63 dBm.

88 dB at 20 kHz channel spacing (29 MHz).

Preamp off, 84 dB; preamp on, 79 dB at 20 kHz channel spacing (29 MHz).

S9 signal at 14 MHz: preamp off, 176 μV ; preamp on, 50 μV .

At threshold, preamp on: FM, 0.03 μV ; SSB, 1.3 μV .

2.4 W at 10% THD into 8 Ω .

Range at -6 dB points, (band width):

CW-N (400 Hz **WIDTH**, 700Hz **SHIFT**): 489-906 Hz (417 Hz);
 CW-W (1000 Hz **WIDTH**, 700 Hz **SHIFT**): 195-1203 Hz (1008 Hz);
 USB-W (LO=300 Hz, HI=3000 Hz): 230-2988 Hz (2758 Hz);
 USB-N (LO=400 Hz, HI=1800 Hz): 391-1804 Hz (1413 Hz);
 LSB-W (LO=300 Hz, HI=3000 Hz): 225-2967 Hz (2742 Hz);
 LSB-N (LO=400 Hz, HI=1800 Hz): 386-1798 Hz (1412 Hz).

As specified.

Preamp off, 98 dB; preamp on, 114 dB.

Preamp off, 115 dB; preamp on, 124 dB.

Transmitter Dynamic Testing

CW, typically 113 W (max), <1 W (min); SSB, 118 W (max); <1 W (min), varies slightly from band to band. AM, typically 24 W (max), <1 W (min). FM, typically 109 W (max), 9 W (min).

<60 dBc on all amateur bands. Meets FCC requirements for spectral purity.

As specified.

As specified.

See Figure 1.

As specified.

See Figure 2.

S9 signal, 14 ms.

15 ms.

See Figure 3.

Expanded Product Review Test Results Report Available

The ARRL Laboratory offers a 30-page test result report on the TS-870S that gives in-depth, detailed technical data on the transceiver's performance, outlines our test methods and helps you to interpret the numbers and graphs.

The report also includes spectral purity charts and receiver sensitivity figures for all bands, all CW keying waveforms (not just worst-case) and other facts to help you make an informed buying decision. The report even includes a summary of how this radio stacks up with similar, previously tested units.

Request the TS-870S Test Result Report from the ARRL Technical Department at \$7.50 for ARRL members and \$12.50 for nonmembers, postpaid.

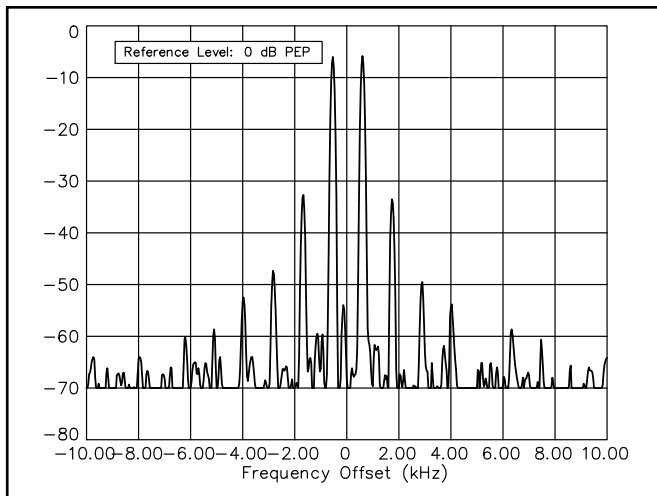


Figure 1—Worst-case spectral display of the TS-870S transmitter during two-tone intermodulation distortion (IMD) testing. The third-order product is approximately 32 dB below PEP output, and the fifth-order product is approximately 47 dB down. The transceiver was being operated at 100 W PEP output at 14.2 MHz.

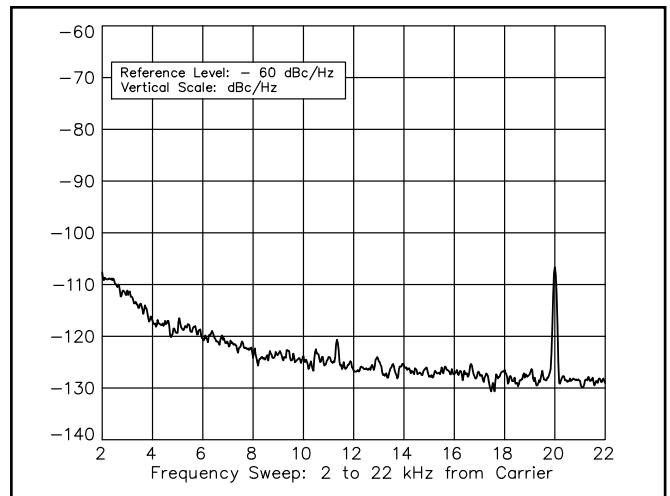


Figure 3—Worst-case spectral display of the TS-870S transmitter output during composite-noise testing. Power output is 100 W at 3.5 MHz. The carrier, off the left edge of the plot, is not shown. This plot shows composite transmitted noise 2 to 22 kHz from the carrier.

memory channels to make bandhopping and frequency swapping a breeze. Unlike its DSP competitors, the ICOM IC-775DSP or the Yaesu FT-1000MP, the Kenwood TS-870S does *not* have dual receive capability. You can transmit or receive on either VFO or a memory channel, however. Press the appropriate buttons in the RX and TX columns to the right of the **MODE** buttons to make a selection. A small LED lights in each active button. A single memory channel can store separate transmit and receive frequencies as well as mode information. The inability to store filter settings in any memory channel or band register was a common complaint from reviewers, however. It seems odd in a radio this sophisticated that you can't save a particular filter setting with a certain frequency, but the radio *does* remember what filter setting you used last with each mode.

UP and **DOWN** buttons let you switch bands in sequence or (with the **1MHZ** button activated) change frequency in 1-MHz steps instead. Additionally, a ten-key, multifunction keypad allows direct frequency entry, as well as storing memory data, selecting scan functions and controlling the memory keyer features. In VFO mode, you use the **M.CH/VFO.CH** control to make large frequency excursions within a band in steps of 1, 5 or 10 kHz (menu settable).

For split-frequency operation you simply select one VFO (or memory channel) for receive and the other VFO (or memory channel) for transmit. Or you can program a memory channel with both frequencies. If you select different VFOs or memory data for transmit and receive, you press and hold the **TF-SET** button and use the main tuning knob to set your transmit frequency.

One reviewer, who was used to the typical "split" button, found this a bit confusing. It does take getting used to. The

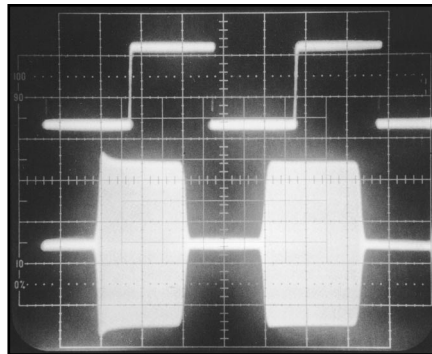


Figure 2—CW keying waveform for the TS-870S in the semi-break-in mode showing the first and second dits. The upper trace is the actual key closure; the lower trace is the RF envelope. Horizontal divisions are 10 ms. The transceiver was being operated at 100 W output at 14.2 MHz.

right side of the display shows the transmit frequency and the word **SPLIT** in small red letters above it. There is *no* other indication. One contest group that used the '870S displayed both receive and transmit frequencies but felt it was too easy to transmit on the wrong frequency.

Would You Like a Menu?

As we've suggested, all the '870S's features are not obvious at first glance. They're "hidden" within a menu system that our review team found easy to use. The **MENU** button provides access to dozens of user-definable operating parameters, while the **M.CH/VFO.CH** button selects the appropriate menu item. Two identical menu banks (68 items each) let you define two completely different sets of operating conditions! This is useful for operators who want

the radio to perform one way for contesting or DXing, but yet another for rag chewing or operating digital modes. Ham families using the same radio also might find the two menu banks helpful.

You'll want to have the manual at hand as you make your menu selections—at least at first—because the abbreviated word display can be a bit cryptic.

Among many other things, the menus let you set or adjust AGC release times for various modes, CW rise and decay times, CW pitch, speech processor frequency response, panel brightness and various DSP parameters.

DSP Goodies

Four pushbuttons along the upper right-hand side of the front panel access the radio's DSP functions: **AUTO NOTCH**, **BEAT CANCEL**, **N.R.** and **TX EQ**. The first three are adaptive filters that can identify various interfering signals or noise and modify their filtering characteristics based on the particular noise or interference. (You can switch between SPAC or Line Enhance using a menu selection.) Auto notch only works in SSB mode. This DSP filter identifies interfering tones in the receiver pass-band and attenuates them. Beat cancel works in both SSB and AM, and is *similar* to the auto notch filter, but can be more effective for some types of tones. Some reviewers lamented the lack of beat cancel or manual notch for CW. ARRL Lab tests found beat cancel was more effective against multiple heterodynes than auto notch, which only worked well against a single heterodyne.

The DSP noise reduction system operates in *any* mode and effectively reduces random background noise. It's a bit like an analog noise blanker (the TS-870S has one of those, too), but it seems more effective

than the typical noise blanker, which is best at combating pulse-type noise. Some reviewers were disappointed the noise reduction was not front-panel adjustable, as it is on competing transceivers as well as on many add-on DSP boxes. A menu choice lets you adjust the optimal correlation time for best reception using NR.

The **TX EQ** button lets you apply high-frequency boost, bass boost or comb filtering to your transmitted phone signal according to a menu setting. Other menu settings also let you tweak transmitted audio characteristics. In other words, you can tailor your transmitted audio characteristics to better match your voice, microphone frequency response and room acoustics. Reviewers got good audio signal reports during on-air testing. The transmitted audio did not seem distorted even with 10 dB of speech compression cranked in. As expected, the processor did add extra "punch" to the signal.

Now to the heart of the matter, the two small knobs—**LO/WIDTH** and **HI/SHIFT**—that adjust the DSP filter settings. For phone reception, the **LO/WIDTH** knob selects the low-frequency cutoff and the **HI/SHIFT** knob selects the high-frequency cutoff. On CW and FSK the **LO/WIDTH** knob selects the bandwidth, while the **HI/SHIFT** knob sets the IF shift in CW. But watch out! Using the menu, you can change CW pitch, or offset, and if you select a narrow filter bandwidth and adjust the IF shift, it's possible to move the received signal clean out of the passband! For example, if CW pitch is set to 500 Hz and the bandwidth is 100 Hz, with the IF shift at 700 Hz you won't be able to tune the received signal for zero beat.

All reviewers liked the ability to easily and quickly adjust DSP filter characteristics. Several commented on the operation of these controls. Both give positive tactile feedback—you can feel them "click" as you rotate them, each click representing another step in the DSP filtering. These steps seem optimal for SSB, but, at times, too large for other modes, where several reviewers longed for finer control. For example, you can select CW filter bandwidths of 1000, 600, 400, 200, 100 and even 50 Hz. (In FSK, available bandwidths are 1500, 1000, 500 or 250 Hz.) At times one bandwidth seemed too wide and the next one too narrow. While running RTTY, for example, I would have preferred a bandwidth somewhere *between* 500 and 250 Hz, especially while tuning for stations. CW operators expressed similar sentiments.

A peek at the Service Manual sheds some light on what happens inside the radio when you turn these knobs, and perhaps offers an explanation for the "digital" steps. The radio's microprocessor selects IF filter combinations based on the **LO/WIDTH** and **HI/SHIFT** settings. In addition, the microprocessor sends control signals to the PLL and DDS local oscillator circuits. By changing the LO frequency, the signal is shifted

so the high and low-frequency edges of the combined filter response reduce the effective bandwidth. Kenwood calls this technique "slope tuning." Purely from an operating point of view, our reviewers would have preferred to have the filters continuously tunable, in an "analog" fashion. But, Kenwood's implementation virtually demands a limited number of digital steps.

You may have to "twiddle" the two knobs—and adjust the AGC time constant—to obtain the best performance. But, this design means that strong signals close to your desired receive frequency, especially on CW, may cause some blocking. Turning on **AIP** and adding some attenuation may help.

I didn't experience any interference that couldn't be acceptably reduced using the TS-870S's various adjustments. On the other hand, tests in the ARRL Lab confirmed that strong, close-in signals could produce troublesome IMD and degrade dynamic range in the TS-870S.

Our in-house receiver guru, Dave Newkirk, WJ1Z, asserts that Kenwood's filtering scheme produces "the best receive audio I've heard in an Amateur Radio product." One reason, Dave goes on to say, is that the TS-870S receiver has excellent immunity to in-passband IMD. Another reason, he says, is that the TS-870S's combination of linked variable-IF-bandwidth and DSP IF filtering "gives you maximal control over how much of an incoming signal the radio converts to audio: If you want, you can receive SSB with *no* detectable 'other side of zero beat' response and an audio passband that's flat from nearly 0 to beyond 6 kHz."

The TS-870S, Dave says, "lets you tailor your receive passband to match that of transmitted signals, and the resulting high-quality sound can be a revelation." Dave deplored the small size and poor audio fidelity of the built-in speaker. To take best advantage of the received audio quality, a good external speaker is a must.

Computer Control

Kenwood packages its *Radio Control Program* software with the TS-870S. This nifty *Windows* application lets you completely control the radio from your computer. A graphical representation of the radio is right there on the screen, and you can push its buttons and twiddle its knobs with your mouse or other pointing device. Clicking on the telegraph key graphic brings up a text screen where you enter text and click the key button to send it. You can even store and load text files with "canned" messages. It's that simple!

Using the computer-radio interconnection via the built-in RS-232 port, you can literally create your own user interface. Don't like the position of the main tuning knob? No problem. Just move it! Prefer a radio with a different shape or with customized controls? You've got it! You can design, display and operate the radio of

your dreams.

It is fun to experiment with this software. The familiar *Windows* drag and drop editing, "radio button" controls and pull-down menus make the program easy to navigate. In addition, many contesters like to use contest software packages like *CT* or *NA* to run their stations. It's easy with the TS-870S: just connect a 9-pin modem cable and let your software do the rest.

CW Ops Only

CW ops will revel in the TS-870S's built-in, full-featured Logikey K-1 memory keyer, controlled from the front panel. The keyer was a favorite among the CW enthusiasts who tried the radio. (This is the CMOS Super Keyer II as seen in November, 1990, *QST* and featured in recent *ARRL Handbooks*.) It's a lot of fun to play with, and the Operator's Manual devotes six pages to it. The available speed range is about 6 to 60 wpm, settable in ranges referenced on 20 wpm. The keyer includes four message memories that can call each other and that can send automatic serial numbers for contesting.

Unless you're using an amplifier, it's best to turn off the loud, clacking amplifier switching/keying relay (a menu option). The **FULL/SEMI** button selects full (QSK) or semi-break-in CW operation.

Other Features

If you'd like, the TS-870S lets you program a set of "boundary" conditions for use with its automatic mode. In this case, as you tune the radio, say from the phone portion of the band into the frequency range used for digital modes and then into the CW region, the radio *automatically* selects the appropriate mode. You can set up to 19 such boundaries. Each mode change selects the last-used filter setting for that mode. You can't store particular filter settings with the boundaries, however.

The built-in automatic antenna tuner is supposed to match impedances between 20 and 150 Ω . The tuner certainly does a good job matching a resonant antenna beyond its "normal" bandwidth, but it won't work miracles. I found it helpful for matching my dipoles and tri-band Yagi over the entire band. Near band edges, where the SWR tends to climb, the tuner could provide a near perfect match.

Another feature reviewers found especially useful was the "quick memory." Say you're not having any luck trying to break the DX pileup and want to come back a bit later to try again. Just hit the **M.IN** button. You can store up to five frequencies this way. To recall them, hit the **MR** button. Turn the **M.CH/VFO.CH** knob to step through the five quick memory channels. Data move through these channels in a first-in/first-out fashion, so when you store a sixth frequency the first one is pushed out of the register and lost.

Using menu selections, you can repro-

DSP in the Kenwood TS-870S

Like the rest of the current crop of DSP-equipped amateur MF/HF transceivers, the TS-870S performs digital signal processing at a low IF, about 11.3 kHz in this case. On receive, the signal is first mixed to 73.05 MHz and passed through the 15-kHz-wide "roofing" filter, then shifted down to 8.83 MHz to pass through a 3 or 6-kHz filter (or through *no* filter in FM). The signal is then shifted to 455 kHz, where it passes through a 3, 6 or 15-kHz filter. Finally, the signal is mixed down to 11.3 kHz and applied to the DSP's analog-to-digital converter.

The various oscillators that set the mixing frequencies are all digitally controlled, and that turns out to be important. The TS-870S uses a time-honored technique to achieve adjustable bandwidth and IF shift by varying these oscillator frequencies so that one side of the receiver passband is set by the 8.83-MHz filter and the *other* side by the 455-kHz filter. The resulting band-limited signal then is demodulated by the DSP. It is also bandpass *filtered* by the DSP, and the DSP generates the AGC voltage. Since both the oscillators used for mixing and the DSP unit are digitally controllable, the TS-870S can adjust the analog passband and the digital passband in tandem.

Consider what this means. If the TS-870S relied only on DSP to narrow the receiver's passband, signals outside the DSP filter but inside the analog passband would pound away at the IF circuitry, possibly causing gain compression (blocking) and/or IMD generation. On the other hand, if the TS-870S relied only on the analog filters to set the passband, strong-signal performance wouldn't be as bad, but you wouldn't have the advantage of the "brick-wall" shape of a DSP filter's frequency response. But the TS-870S uses *both* kinds of filtering. That means the receiver's ultimate passband is set by the DSP filters, but signals outside the DSP filter passband are attenuated by the analog filters.

The results of this tradeoff are particularly noticeable in CW. To achieve a typical CW passband of 400 or 600 Hz, the analog filters are shifted so that their passbands overlap only by the desired amount. But *between* the filters, in the mix down to 455 kHz, a full 3-kHz-wide swath of signals—the signals that pass through the 8.83-MHz filter—is present. This means that signals within this 3-kHz-wide band, but outside of the desired passband, may cause blocking or generate IMD. (For an explanation of this effect, see "Putting Variable-Bandwidth Tuning Back into Late-Model ICOM IC-751A Transceivers," Hints and Kinks, April, 1991, *QST*.) We found this to be the case with the TS-870S. For example, blocking dynamic range degrades by 10 dB or so when a signal appears *inside* the 8.83-MHz filter, as compared to the same signal appearing *outside* that filter. Older, non-DSP Kenwood designs allowed for inclusion of narrow crystal filters—typically 500-Hz-wide—in the IF stages. These created a narrow passband with a good shape factor, which simply isn't the case when using one IF to set the high edge of the passband and the other IF to set the low edge. The DSP in the TS-870S takes care of the shape factor, but the lack of a narrow crystal filter means that a wide-bandwidth signal is always present in the 8.83-MHz IF stages, no matter what **LO/SHIFT** or **HI/WIDTH** settings you use.

The radio uses two Motorola DSP56002 DSP chips, which represent a lot of processing capability. This allows the demodulation and filtering functions to be combined with adaptive filters for noise reduction and automatic notching.

In transmit, the TS-870S uses the DSP system to generate the modulated signal, which is then mixed up to the output frequency through several stages. The DSP also processes the transmitted audio, including speech compression and VOX, and generates the CW sidetone and the radio's various control beeps, a nice economy of circuitry. (Why *not* use the DSP instead of building a beep oscillator?)

The TS-870S does a good job of integrating DSP technology into an HF transceiver. While any technology can be improved, the scheme used by Kenwood takes good advantage of the possibilities of digital signal processing. If provision were made for optional 500-Hz crystal filters, the combination of analog and DSP performance would be nearly ideal.—*Jon Bloom, KE3Z*

gram four front-panel buttons (**ENTER**, **TF-SET**, **1MHz** and **FINE**) to handle other functions you might find more useful. Or, you can disable them altogether if you want.

The TS-870S Instruction Manual is 100-plus pages chock full of clearly written and easy-to-understand information and operating tips. It even includes a brief DSP tutorial. Plenty of diagrams help you identify various controls and connections. Sche-

matic diagrams are on two 23×32 inch folded sheets, and there's a smaller block diagram.

No one on the review team even mentioned cooling fan noise with the TS-870. Indeed, it's hard to tell when it's running.

The "Dark" Side

There's nothing particularly remarkable about the radio's rear panel, except a lack of

clutter. There are two antenna jacks, plus connections for a keyer paddle, a straight key or external keying device, external speaker, amplifier connections, accessory connector for a multimode communications processor (MCP) for RTTY, packet and other digital modes and a 9-pin RS-232 computer interface connector. I was glad to see a ground lug with a wing nut and washers rather than a "push-in terminal" for a solid wire that some radios *call* a ground connection. A phono jack provides the 8.83-MHz IF signal for connection to a station monitor.

Fortunately, Kenwood supplies the 13-pin DIN plug accessory connector for an MCP, since it would no doubt be difficult to find one otherwise. Soldering connections to this plug is no picnic, however. The spacing between pins is one-tenth of an inch, so solder bridges and stray wire strand problems happen easily.

You'd think the phono jack labeled **EXT RX ANT** is for an external receive antenna, but you'd be wrong! This jack lets you connect a second *receiver* to the '870S. Kenwood concedes that connecting a separate receive antenna to the TS-870S, such as a Beverage for 80 or 160 meters, is not possible without internal modifications.

The TS-870S does *not* have a built-in AC power supply. It needs 13.8 V dc at 20.5 A. If you don't already own a suitable supply, add *that* cost to the price of the radio!

The Complete Radio?

I have yet to find the "perfect radio" at a price I could afford. We could consider the TS-870S to be the "*complete* radio," however. Except for the required power supply, the TS-870S is ready to go as it comes out of the box. It doesn't need additional IF filters, an external audio DSP unit or an external memory keyer. Available matching accessories fall under the heading of *nice* to have rather than *need* to have.

Perhaps Dave Newkirk summed it up best: "Nits aside, the TS-870S is a great beginning for something new in Amateur Radio: Radios with *IF* DSP that do *IF filtering*—IF DSP that's teamed with AGC performance that needs no apology and that produces the stellar receive audio today's best analog designs can only approximate."

Thanks to these hams who contributed operating impressions and comments for this review: Rick Lindquist, KX4V; Dave Newkirk, WJ1Z; Glenn Swanson, KB1GW; Jon Bloom, KE3Z; Mike Gruber, WA1SVF; Tom Frenaye, K1KI (and his contest team) and Emil Pocock, W3EP.

Manufacturer's suggested retail prices: TS-870S, \$3199.95, MC-90 desktop microphone, \$269.95; PS-52 heavy-duty power supply, \$309.95, SP-31 external speaker, \$99.95. *Manufacturer:* Kenwood Communications Corp, P.O. Box 22745, Long Beach, CA 90801-5745, tel 310-639-5300.