


F1721/F1821 Series PA Connections

Programming and Connections

1. Open the cloning software.
2. Navigate to **Key & Display**. Set a programmable key to **Public Address**.
3. Set **PA/RX Speaker** to **ON**.
4. Connect the speaker to the 25 pin connector on the rear panel as follows:

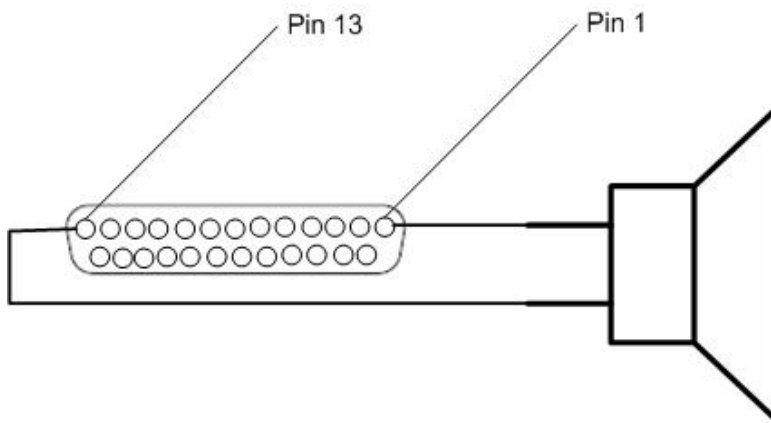

Operation

Press the assigned PA key.

Adjust volume with the dial (if available) or use the up/down keys. Volume numbers will scroll on the display.

Press PTT and speak.

Tested with the Atlas Sound (AP-15-4) 4Ω speaker.