

TRIDENT TA4M4L yagi



Trident TA4M4L

Manufactory claimed specs

Specifications

Freq. Range	70-70.5 MHz.
Gain	11.022 dBi. (Free space)
Front to Rear	19.9 dB.
Feed Impedance	50 Ohms
Power Handling	1.5 Kw.
Matching	Hairpin.
Boom Length	3.2 Metres. 43 mm Diameter.
Element Diameters	13 mm. Stepped down to 9.5 mm.
Feeder Connection	2 x 4 mm Threaded Terminals
Weight	4.5 kgs.

Trident TA4M4L

In brief

70 MHz band 4 elements yagi with hairpin

Metal : duralumin

Total boomlength = 3.207M

Element diameter = $\varnothing$ 12.7 / 9.5 mm


Round boom = $\varnothing$ 42.8 mm

Total weight = 4.5 Kg

BAND	Active elts	Gain (dBd)	F/B ratio	min SWR
70 MHz	4	8.8	19.9	1.05


Trident TA4M4L

Element real dimensions (cm)

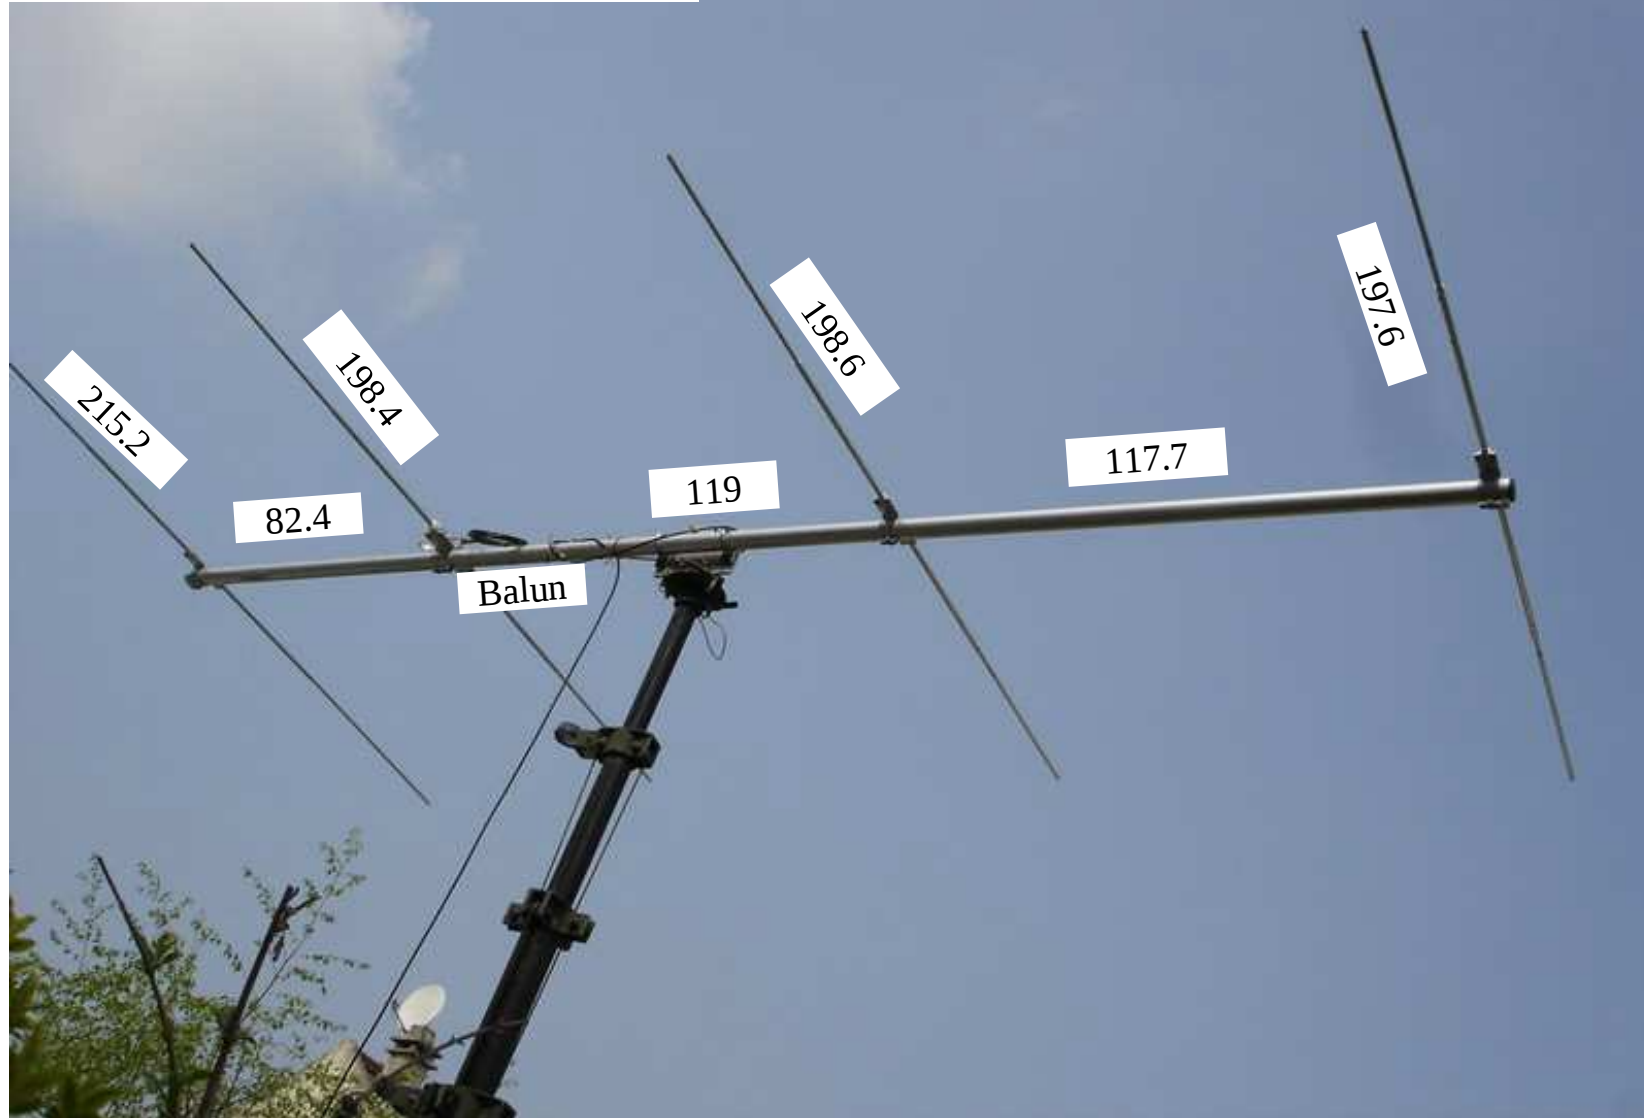

Trident TA4M4L

Mmana simulator: antenna aspect

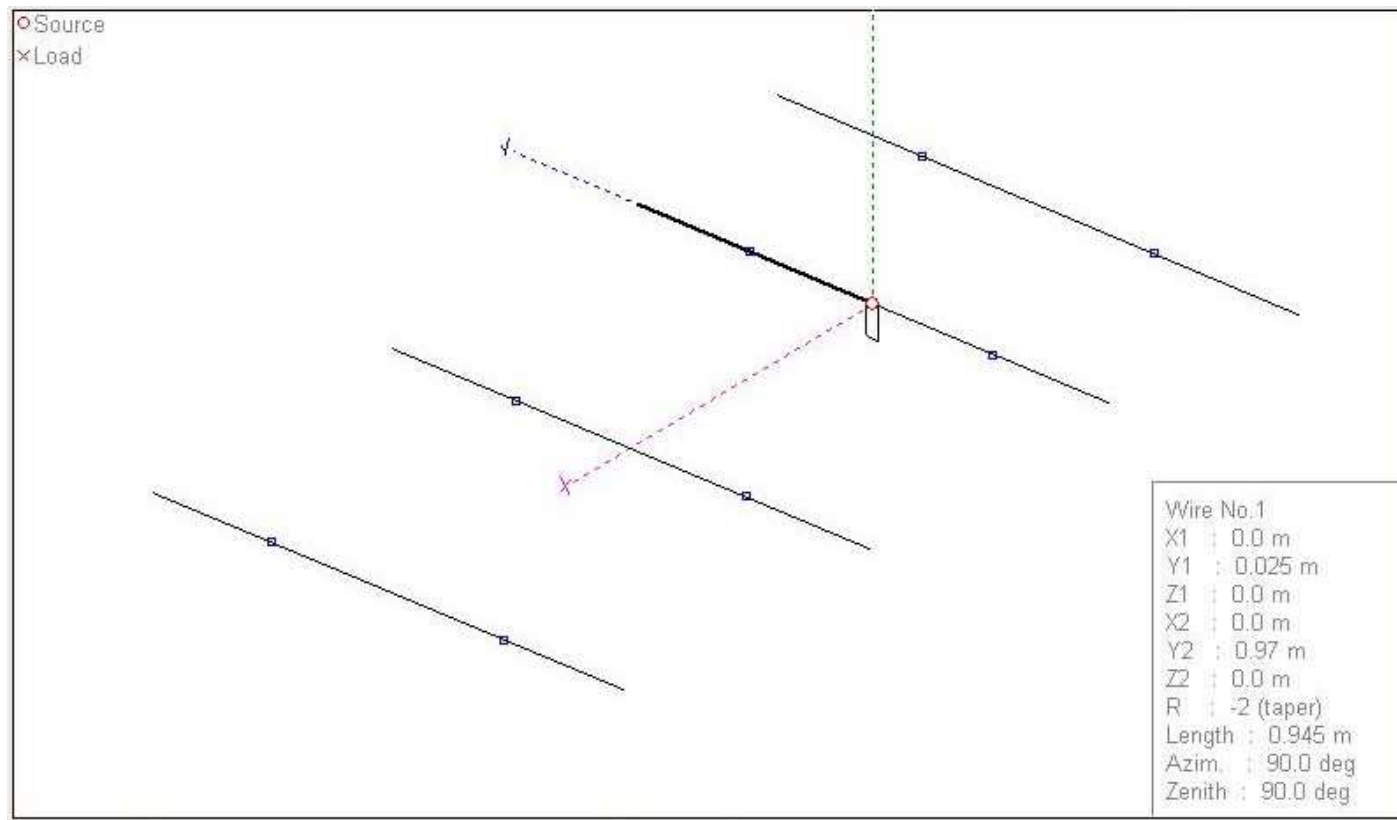

Trident TA4M4L

Mmana simulator: Trident antenna dimensions

70 MHz Trident TA4M4L, real boom 3.19m hairpin 4el F5DQK								
Parameters		View		Change only end points		Change all coordinates proportionally		
No.	Form	Int.(m)	Width(m)	Height(m)	Length(m)	R(mm)	Seg.	Wires
1	H line	0.0	2.138	0.0	0.0	-1.0	-1	1
2	H compl	0.81	1.94	0.125	0.0	Mixt	Mixt	6
3	H line	2.0	1.967	0.0	0.0	-1.0	-1	1
4	H line	3.177	1.93	0.0	0.0	-1.0	-1	1



Ø 12.7 mm on common length = 95 cm then ending Ø 9.5 mm



Manufactory **El position** and **width**

Mmana simulator: simulated gain

No.	F (MHz)	R (Ohm)	jX (Ohm)	SWR 50.0	Gh dBd	Ga dBi	F/B dB	Elev.	Ground	Add H.	Polar.
1	70.2	49.95	0.291	1.01	8.83	10.98	18.66	0.1	Free	---	hori.



Trident TA4M4L

Measures at 70.2 MHz using Mmana simulator

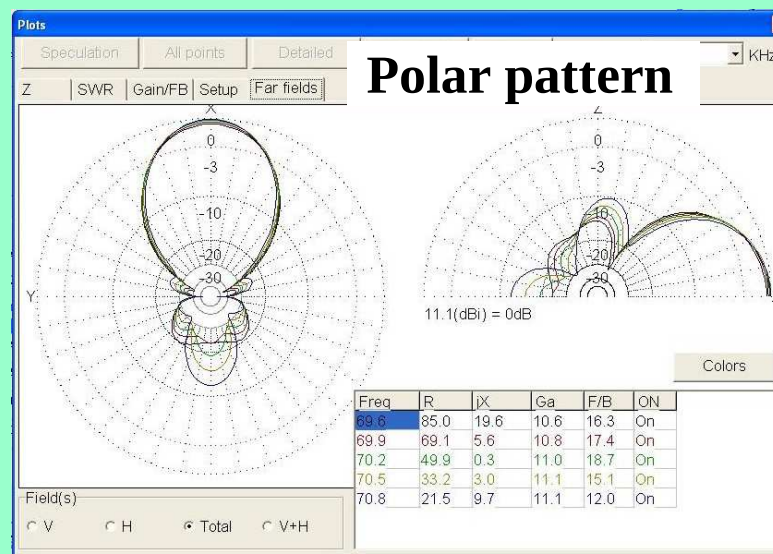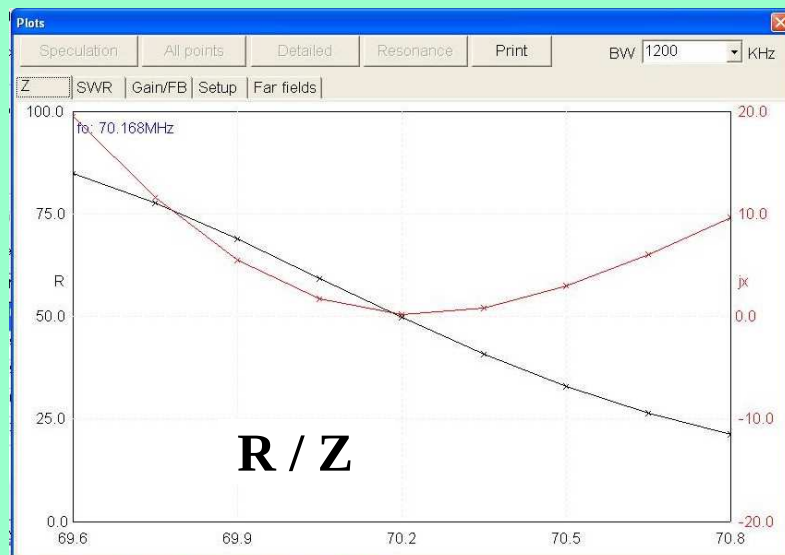


Trident TA4M4L

Directors or reflector clamp on boom (3 pieces)

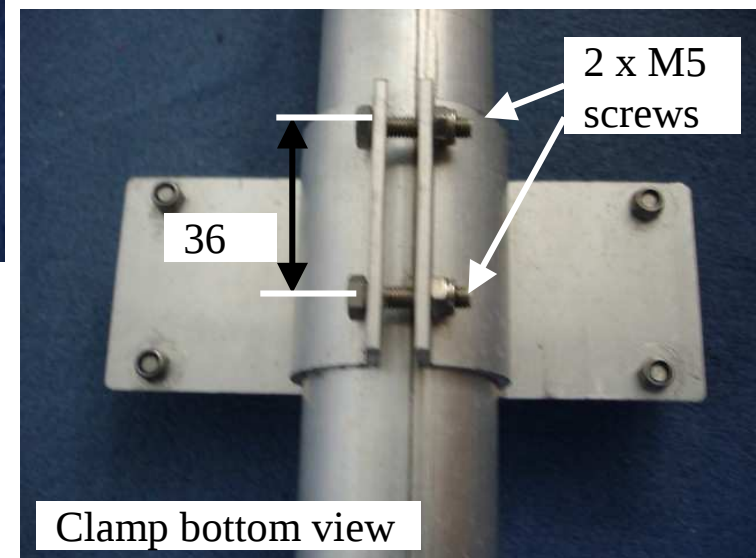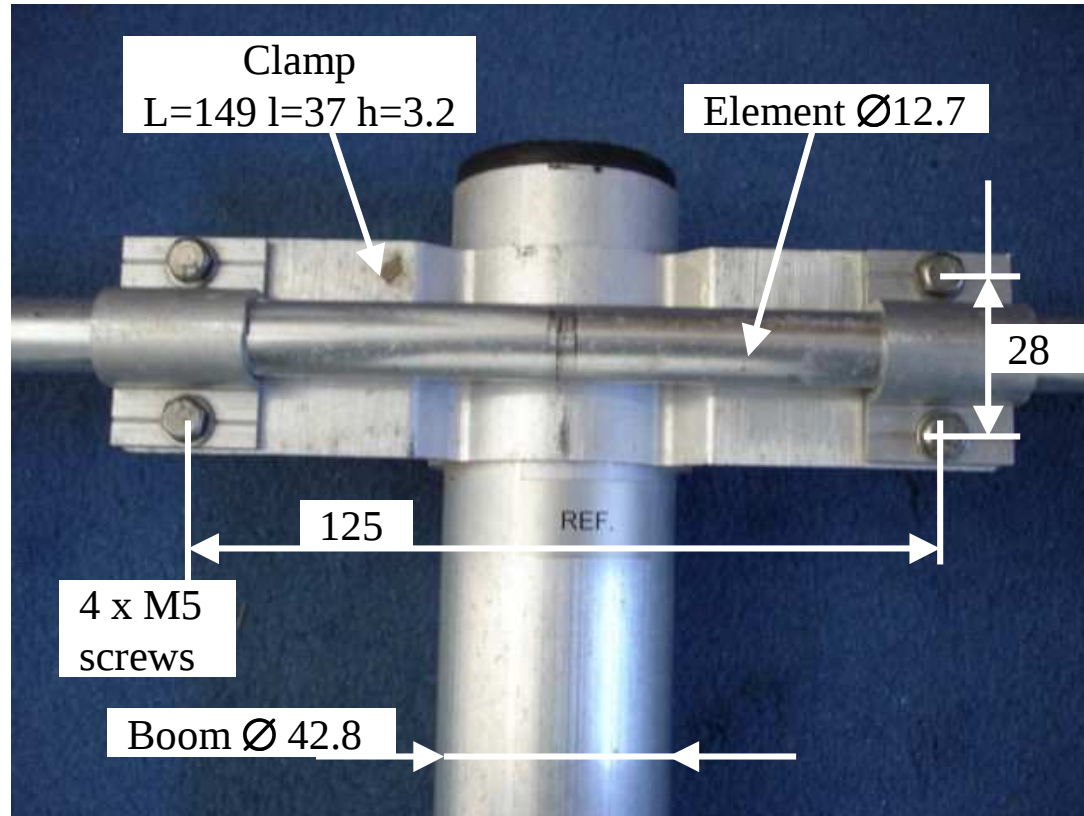

Trident TA4M4L


Driven element clamp & hairpin

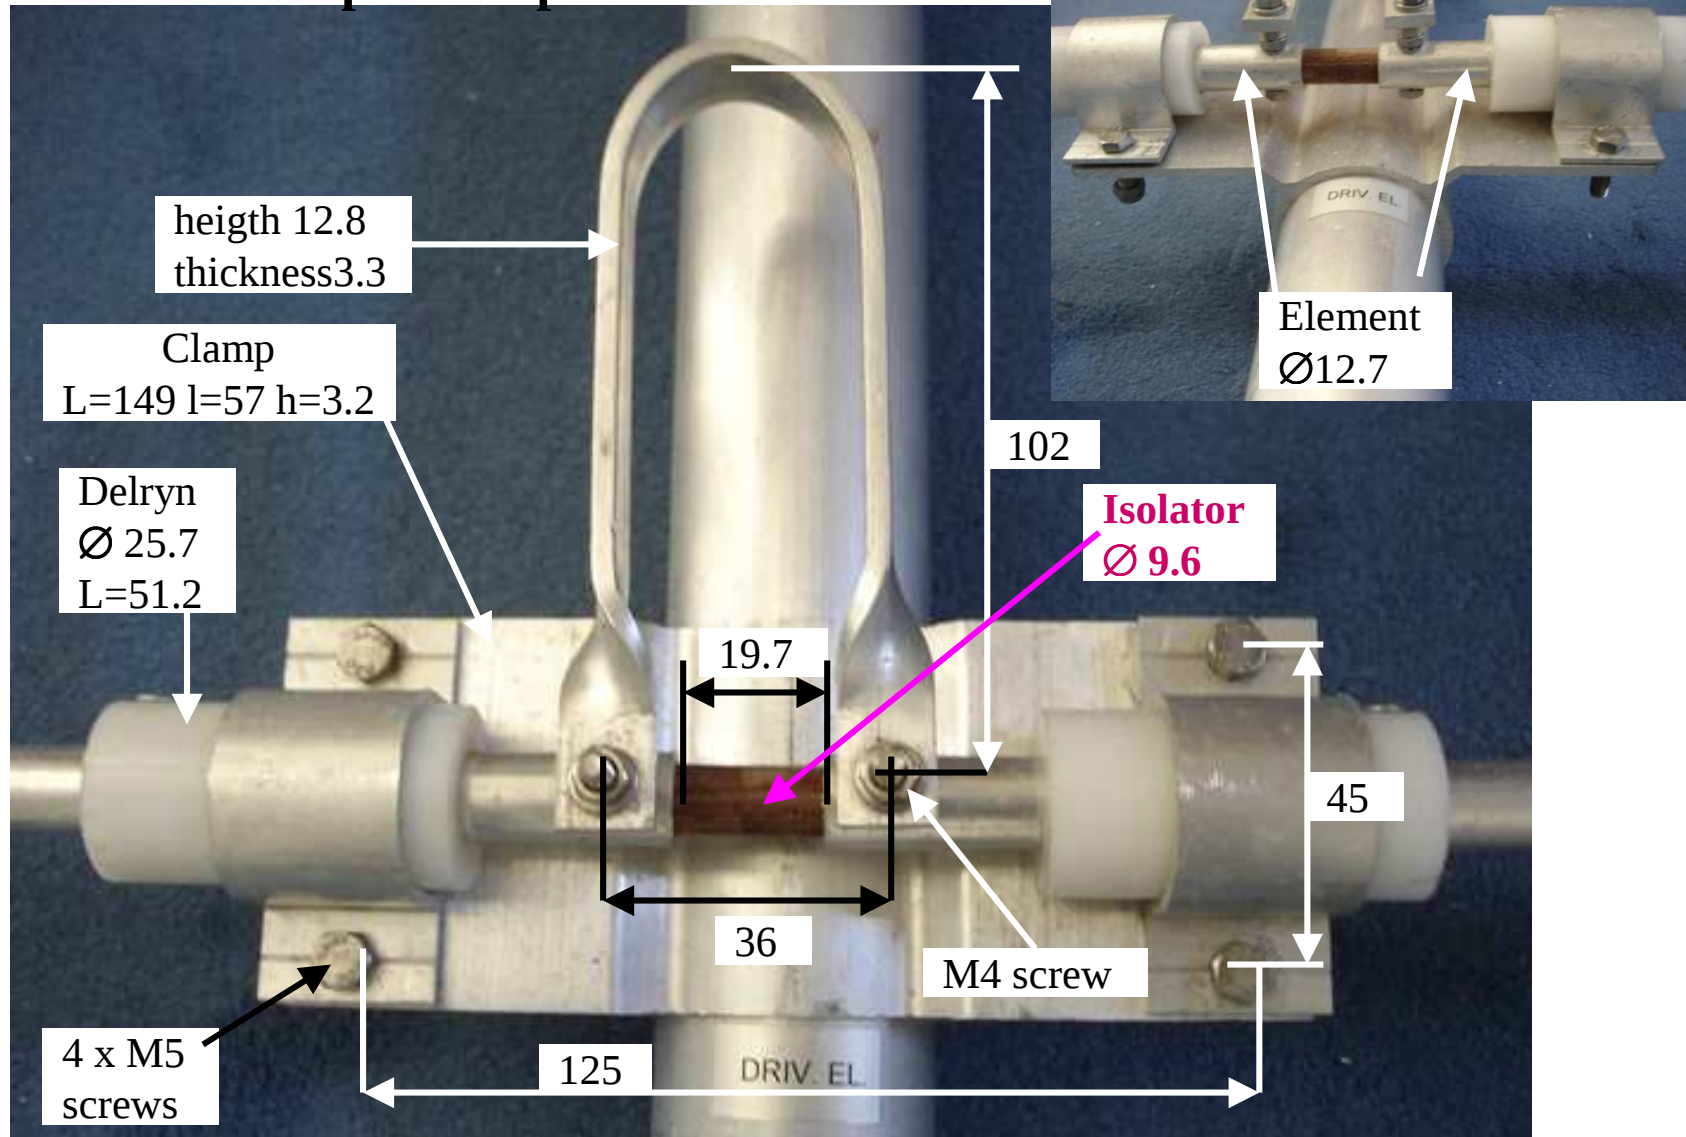

Trident TA4M4L

Practical measures on GEROH mast at 10 meter heighth

Element real dimensions (cm)

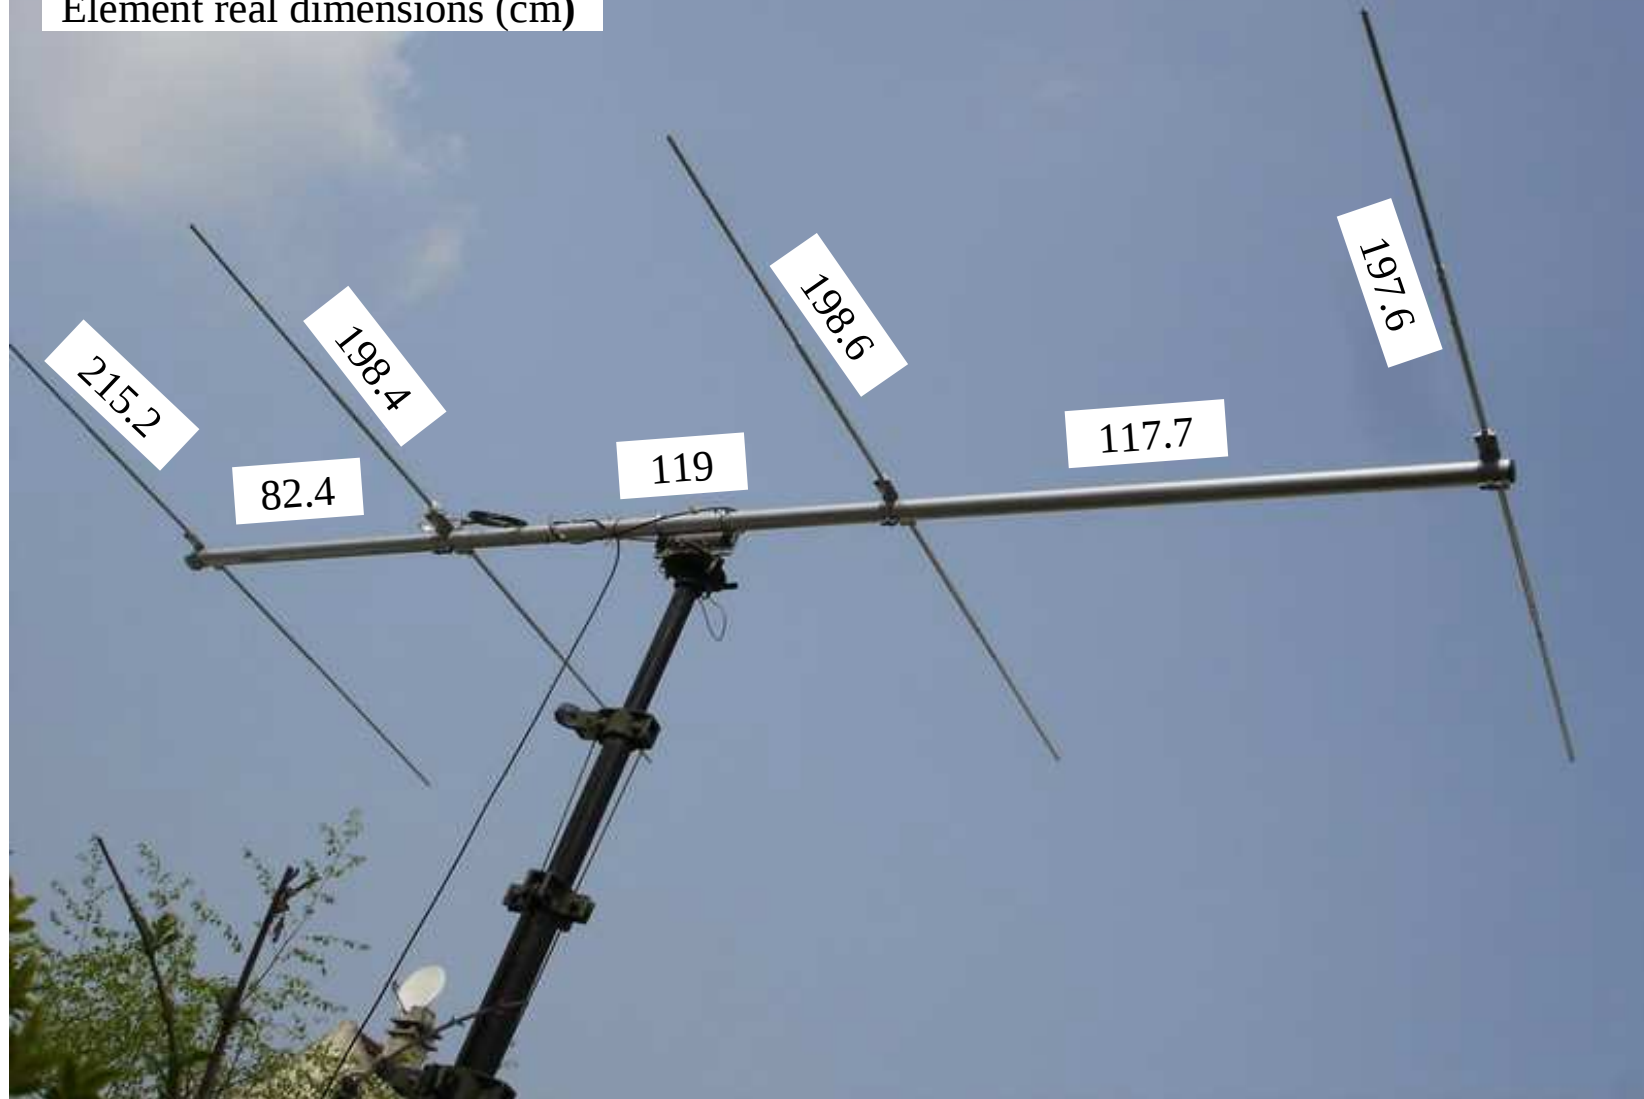

Trident TA4M4L

Practical measures on GEROH mast at 10 meter heighth

SWR	2	1.5	1.2	min or 1.1	1.2	1.5	2
Direct coax feed	69.2	69.81	----	70.025 / 1.25	----	70.22	70.55
1/1 balun	68.9	69.71	69.94	70.05	70.24	70.42	70.71

Enormous min SWR without the 1/1 balun !!

1/1 balun = 5 turns coax RG-58U
or KX 15 giving a Ø 13 cm coil



Trident TA4M4L

Practical measures on wood ladder



Trident TA4M4L

Practical measures on wood ladder

SWR	2	1.5	1.2	min or 1.1	1.2	1.5	2
Direct coax feed	69.39	69.85	70.02	70.076 / 1.15	70.18	70.31	70.54
1/1 balun	68.97	69.65	69.87	70.033	70.225	70.362	70.635



Trident TA4M4L

Gain comparaisn with other mono / dualband antennas versus boomlength

<i>Four meter band</i>	Model	Boomlength (M)	Gain (dBd)
Moonracker revued by YU7EF	5 el	2.6	7.86
Jaybeam double band	DBM4_4/6	3.0	6.27
Trident TA4M4L	4 el	3.2	8.83
YU7EF 10el	simulation	4.15 (electrically 3.79)	7.2
Vinecom 9 el double band	6n4_4236	4.236	7.21

Conclusion

It directly gives 1 dB more gain than the 5 el Moonracker using :

- one less driven element
- a boom only 60 cm longer