


ICOM

Receive and Transmit Expansion

IC-728
IC-729

Expansion Range

.5 MHz - 30 MHz.
No 50 MHz expansion available.

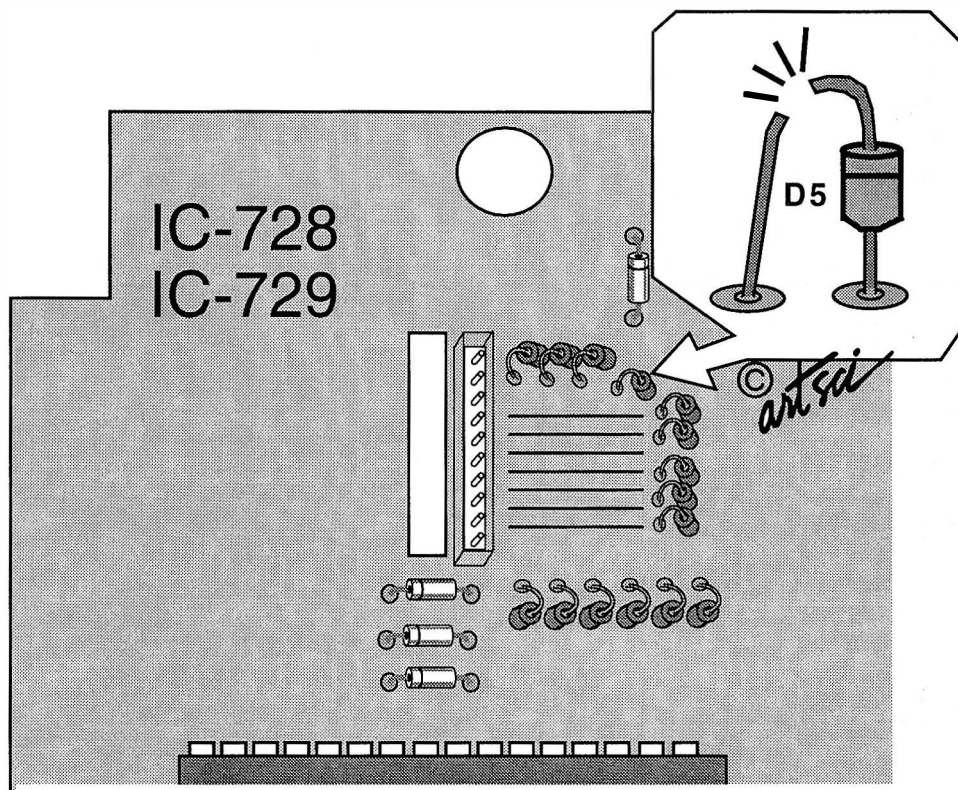

Expanded RF Modification

1. Remove power and antenna.
2. Remove screws open case.
3. Locate PLL board.
4. Locate and **cut diode D5**
5. Reassemble the radio.
6. Reset the microprocessor
(Press & Hold [F] & [MW] and turn power on)

Radio/Tech Modifications Volume A

ICOM - 34

artsci
Photocopies are a violation of copyright law. © artsci inc. all rights reserved.
Have the original book with you when you call with a question. **Use at your own Risk!**
The Author and all other parties take no responsibility for any damages or violations
caused by these modifications. Some modifications may violate FCC rules.
(818) 843-4080 12-4 PST • www.artscipub.com • artsci@artscipub.com