

SPECIFICATIONS

GENERAL

• Frequency coverage

Version	Transmit	Receiver
USA	420-450MHz *1	400-479MHz *1
EXP	400-479MHz *2	400-479MHz *2
EXP-01	430-440MHz	400-479MHz *2
AUS	420-450MHz *2	400-479MHz *2
KOR	430-440MHz	430-440MHz

Guaranteed range: *1 440-450MHz, *2 430-440MHz

• Type of emission	F2D, F3E, F7W
• Mode	DV, FM, FM-N
• Number of memory channels	1252 channels (including 500 regular channels, 700 D-STAR repeater, 50 program scan edges and 2 call)
• Frequency resolution	5, 6.25, 10, 12.5, 15, 20, 25, 30, 50, 100, 125 and 200kHz
• Operating temperature range	-20°C to +60°C; -4°F to +140°F
• Frequency stability	±2.5ppm (-20°C to +60°C on the basis of 25°C)
• Power supply requirement	7.4V DC (with BP-271, BP-272) Alkaline cells External DC power 5.5V DC (with BP-273) 10-16V DC
• Current drain (at 7.4V DC)	Tx High Rx Internal SP (16Ω) External SP (8Ω)
• Antenna impedance	Less than 2.5A Less than 450mA/350mA (DV/FM, FM-N) Less than 300mA/200mA (DV/FM, FM-N)
• Dimensions (WxHxD, projections not included)	50Ω (SMA) 58x95x25.4 mm; 2.28x3.74x1 in
• Weight (approx.)	140g; 4.94oz (without battery), 225g; 7.94oz (with BP-271 & antenna)

TRANSMITTER

• Modulation system	DV, GMSK reactance modulation, FM, FM-N FM reactance modulation
• Output power (at 7.4V DC)	5W, 2.5W, 0.5W, 0.1W (High, Mid, Low, S-low)
• Spurious emissions	Less than -60dBc (High, Mid), Less than -13dBm (Low, S-low)
• Max. frequency deviation	±5.0/2.5kHz (FM/FM-N)
• Ext. Mic impedance	2.2kΩ

RECEIVER

• Sensitivity DV, FM, FM-N	Less than 0.28µV (at 1% BER) Less than 0.18µV (at 12dB SINAD)
• Selectivity DV FM FM-N	More than 50dB More than 55dB More than 50dB
• Spurious rejection	More than 60dB
• Audio output power	(at 7.4V DC, 10% distortion) Internal SP (16Ω load) External SP (8Ω load)

Supplied accessories (*Depending on version)

- Battery pack, BP-271 • Wall charger, BC-167SA/SD/SV*
- Antenna, FA-S270C • Belt clip, MB-127
- Hand strap • Cloning software, CS-31

All stated specifications are subject to change without notice or obligation.
D-STAR (Digital Smart Technology for Amateur Radio) is a digital radio protocol developed by JARL (Japan Amateur Radio League).
Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia, Japan and/or other countries.
All other trademarks are the properties of their respective holders.

Icom Inc. 1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 www.icom.co.jp/world

Count on us!

Icom America Inc.

2380 116th Avenue NE,
Bellevue, WA 98004, U.S.A.
Phone +1 (425) 454-8155
Fax +1 (425) 454-1509
E-mail sales@icomamerica.com
URL <http://www.icomamerica.com>

Icom Canada

Glenwood Centre #150-8165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone +1 (604) 952-4266
Fax +1 (604) 952-0090
E-mail info@icomcanada.com
URL <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone +61 (03) 9549 7500
Fax +61 (03) 9549 7505
E-mail sales@icom.net.au
URL <http://www.icom.net.au>

Icom New Zealand

146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone +64 (09) 274 4062
Fax +64 (09) 274 4708
E-mail inquiries@icom.co.nz
URL <http://www.icom.co.nz>

Icom (Europe) GmbH

Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone +49 (6196) 76685-0
Fax +49 (6196) 76685-50
E-mail info@icom-europe.com
URL <http://www.icomeurope.com>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajoa A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone +34 (93) 590 28 70
Fax +34 (93) 589 04 46
E-mail icom@icomspain.com
URL <http://www.icomspain.com>

Icom (UK) Ltd.

Blacksclo House, Altira Park,
Horne Bay, Kent, CT6 6GZ, U.K.
Phone +44 (01227) 741741
Fax +44 (01227) 741742
E-mail info@icomuk.co.uk
URL <http://www.icomuk.co.uk>

Icom France s.a.s.

Zac de la Plaine,
1 Rue Brindejonc des Moulinais, BP 45804,
31505 Toulouse Cedex 5, France
Phone +33 (5) 61 36 03 03
Fax +33 (5) 61 36 03 00
E-mail icom@icom-france.com
URL <http://www.icom-france.com>

Icom Polska

81-850 Sopot, ul. 3 Maja 54, Poland
Phone +48 (58) 550 7135
Fax +48 (58) 551 0484
E-mail icompolaska@icompolaska.com.pl
URL <http://www.icompolaska.com.pl>

Asia Icom Inc.

6F No. 88, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone +886 (02) 2559 1899
Fax +886 (02) 2559 1874
E-mail sales@asia-icom.com
URL <http://www.asia-icom.com>

Beijing Icom Ltd.

10007, Long Silver Mansion, No.88, Yong Ding
Road, Haidian District, Beijing, 100039, China
Phone +86 (010) 5889 5391/5392/5393
Fax +86 (010) 5889 5395
E-mail bjicom@bjicom.com
URL <http://www.bjicom.com>

OPTIONS Some options may not be available in some countries. Please ask your dealer for details.

BATTERY PACKS AND CASE



BP-271 BP-272 BP-273

Battery packs	Type	Capacity	Operating time* (Approx.)
BP-271	Li-ion, 7.4V	1150mAh (min.), 1200mAh (typ.)	4.5hours (DV) 4.5hours (FM)
BP-272	Li-ion, 7.4V	1880mAh (min.), 2000mAh (typ.)	7.5hours (DV) 8hours (FM)
BP-273	LR6 (AA) batteriesx3	-	-

* Tx: Rx: standby = 1:1.8. Power save function ON, GPS OFF.

WALL CHARGER



BC-167S *1

RAPID CHARGER



BC-202
Charges BP-271/BP-272
in 2/3.5 hours.

BC-123S *2

DC POWER CABLE



OPC-254L/LR

CIGARETTE LIGHTER CABLE



CP-19R

SPEAKER-MICROPHONES



HM-75LS HM-186LS

EARPHONE-MICROPHONES



HM-153LS HM-166LS

SLIM L-TYPE PLUG ADAPTER CABLE



OPC-2144

HEADSETS and PLUG ADAPTER CABLE



HS-94 Earhook type HS-95 Behind-the-head type HS-97 Throat type

DATA CABLE



OPC-2218LU
USB type

CI-V LEVEL CONVERTER



CT-17

CARRYING CASE



LC-178

BELT CLIP



MB-127

FA-S270C UHF ANTENNA

Same as supplied.
AD-92SMA ANTENNA ADAPTER
SMA-BNC antenna adapter.

SP-13 EARPHONE
OPC-2144 is required.

CS-31 CLONING SOFTWARE
Same as supplied.

ICOM

UHF DIGITAL TRANSCEIVER
ID-31A

Further Pushing Evolutionary Boundaries!

Compact
& Lightweight

IPX7
Submersible

GPS
Receiver



D-STAR

Compact & Lightweight



IPX7 Submersible



GPS Receiver



A New Generation of Multi-Function, Easy-to-Use Digital Transceiver

Lightweight & Compact Body

The ID-31A has a compact 58x95x25.4mm (2.28x3.74x1 in) body, and weighs only 225g (7.94oz) with battery pack and antenna (approx.). It's easy for carrying around all the time, anywhere.


IPX7 Submersible Construction

The ID-31A provides superior waterproof protection equivalent to IPX7 (1m depth of water for 30 minutes). Ideal for use in harsh outdoor environments.



Built-in GPS Receiver

The built-in GPS receiver shows your current position and altitude on the display and offers a position reporting function in DV mode. The GPS log function logs your position information at regular intervals (1 second–60 seconds, depending on the setting) and memorizes this in the microSD card to export to your PC. In addition, the GPS-A mode assists in easy D-PRS mode operation.

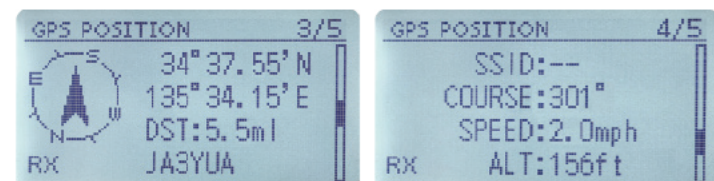

RX (Received sation) position information example

D-STAR DV (Digital Voice) Mode

The D-STAR DV mode has lots of advantages over the analog FM mode: digitally modulated clear voice, 950 bps (approx.) data, individual calling using a call sign and access to the world wide repeater network linked with the Internet.

Automatic Repeater List-up Function

The ID-31A will be shipped with D-STAR repeater memories pre-programmed*. Using the GPS position information, the automatic repeater list-up function shows the list of nearby D-STAR repeaters from the memory.

* To use the automatic repeater list-up function, the position data of the repeater is required. The position data of some D-STAR repeaters may not be available.




Near Repeater Function

Repeater Detail

microSD Card Slot

When used with a microSD card (up to 32GB), various contents including voice memories, GPS log, memory channels, D-STAR repeater memories and other personal settings can be stored on the microSD card and can be transferred to a PC. The voice memory function records incoming and outgoing calls in "WAV" format and allows you to play them on the radio or on a PC.



Other Digital Features

- Automatic speech function announces the received call sign
- Digital code squelch
- Digital call sign squelch
- One touch reply function
- DR (D-STAR Repeater) mode
- Automatic reply function

Full Dot-matrix Display & Directional Keypad

The directional keypad and quick menu button help you with quick and intuitive access to many settings and speeds up the operation. The large full dot-matrix display with easy-to-read characters offers better visibility. The LCD and keypad backlighting is handy for night time operation.



Directional keypad

Easy to see menu icons

5W Output Power

Using a highly-efficient PA amplifier, the ID-31A generates 5W of RF output power from this compact body. The supplied BP-271 provides up to 4.5 hours* of operating time, and the optional large capacity battery pack, BP-272 provides up to 7.5 hours* of operating time.

* Typical operation with 11.8 duty cycle in DV mode (Power save ON, GPS OFF)

External DC Power Jack

An external DC power jack allows for operation with an external DC power supply (10–16V DC*). When used with the CP-19R, CP-12L or OPC-254L/LR, simultaneous operation during charging is possible.

* When more than 14V volts is applied, the output power is reduced to Mid level (2.5W)

CS-31 Cloning Software Supplied

The CS-31 cloning software* is supplied with the ID-31A (supplied with the application CD). Used with this software, various settings including the memory channels, D-STAR repeater memories and other settings can be made from a PC. The latest version of the CS-31 will be available from the Icom web site.

* Either optional OPC-2218LU USB cloning cable or a microSD card is required for transferring the data.

Total 1,252 Memory Channels

The ID-31A has a total 1,252 memory channels, including 500 regular channels, 700 D-STAR repeater (DR) memories, 50 scan edges and 2 call channels with 26 memory banks. All memory channels, program scan can edges and memory banks can be named with 16-character channel comments.

Multiple Scan Functions

The ID-31A supports various scan types for maximum reception and ease of use.

- Full scan
- Programmed scan
- Duplex scan
- Memory scan
- Mode memory scan
- All bank scan
- Selected bank scan
- Tone scan
- Bank link scan (DMS)
- Program scan link
- Skip scan

Other Features

- Analog FM mode (Wide/Narrow)
- Built-in CTCSS/DTCS encoder and decoder (for analog FM)
- 16 DTMF memory channels (24 digits)
- Squelch release function to monitor a weak signal
- Automatic repeater function* (* Depending on version)
- Optional CT-17, CI-V level converter for remote radio control
- Auto power save
- Auto power off
- Clock function
- Priority watch
- Key lock function



UHF DIGITAL TRANSCEIVER **5W**
ID-31A