


■ ENTERING THE ADJUSTMENT MODE

① Turn the power OFF.


② Push and hold the HM-135's [DOWN] key, [TX] and [RX] buttons, then turn the power ON.

NOTE: Inserting the 15 kΩ resistor between 2 pin and 6 pin of HM-135 works same as pushing and holding HM-135's [DOWN] key (See the illustration on page 4-2).

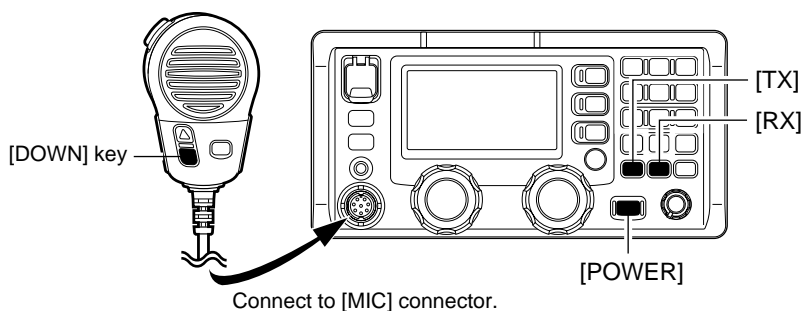


■ OPERATING ON THE ADJUSTMENT MODE


- Enter the TX adjustment from the MAIN menu : Push the [1] button
- Enter the RX adjustment from the MAIN menu : Push the [2] button
- Enter the DSC adjustment from the MAIN menu : Push the [3] button
- Change the next adjustment item : Push the [0] button
- Return to the pre-adjustment item : Push the [CE] button

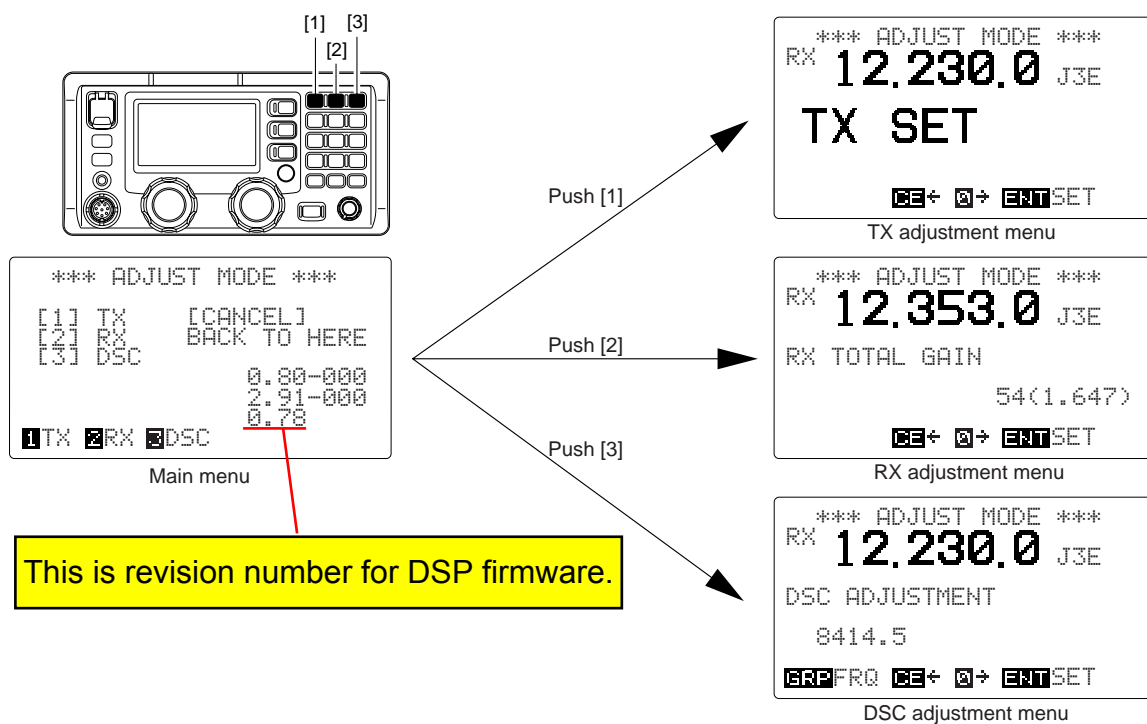


• TX ADJUSTMENT ITEM CHANGING



• RX ADJUSTMENT ITEM CHANGING



• DSC ADJUSTMENT ITEM CHANGING



***NOTE:** DO NOT adjust the "DSC DEMODULATION". Thus, after adjusting the "DSC adjustment", push the [0] button twice to skip it.