



VHF AND UHF TRANSCEIVERS

IC-F3021T

(VHF transceiver with 10-keypad)

IC-F4021T

(UHF transceiver with 10-keypad)

IC-F3021S

(VHF transceiver without 10-keypad)

IC-F4021S

(UHF transceiver without 10-keypad)



F3021 F4021 Series



- 128ch/
8 zones
- 2-Tone, 5-Tone,
CTCSS, DTCS
- VHF 5W
UHF 4W
- IP54 rugged
construction
- 8-character
LCD display
- Optional voice
scrambler

Icom Inc.

SIMPLE, RUGGED, VERSATILE FOR THE EVERY



▲ IC-F3021T

▲ IC-F4021S

Only Icom quality can offer this featured radio. In this compact line, features such as multiple signaling, long battery life and wide frequency coverage. Handheld easily exceeds your expectations for performance and communication quality.

Compact lightweight body

The rounded compact* design fits comfortably in your palm and is light-weight** for carrying around all day. The large size programmable buttons have ample button-pitch to allow blind touch operation.

* 53(W)×120(H)×32.5(D) mm; 2⁹/₃₂× 4²³/₃₂×1⁹/₃₂ in

** 260g; 9.2oz including BP-231

IP54 dust-protection and splash resistance

The IC-F3021 series meets IP54 requirements for dust-protection and splash resistance. The aluminum die-cast chassis is the basis for this rugged construction, allowing long-life usage in various environments.

128 memory channels and button control memory channel

The IC-F3021 series has 128 memory channels with 8 zones. Memory channel selection can be made easily with the up/down buttons laid out below the PTT button.

Most popular signalings built-in

Use the built-in 2-Tone, 5-Tone, CTCSS and DTCS capabilities as standard to set up your own talk groups and quiet stand-by when others are talking.

Multiple 2-Tone, Multiple 5-Tone

Up to ten 2-Tone and eight 5-Tone codes can be decoded on a channel. When a matched tone is received, the following items are programmable for each code.

- Beep sound
- Answer back
- Scan
- Bell icon
- Radio stun/kill

Lithium-Ion battery standard

The IC-F3021 series comes with the BP-231 Li-Ion battery pack as standard. Li-Ion batteries have virtually no memory issues and allows you flexible charging. The optional BP-232 provides a high capacity 2000mAh for longer operating time.

VHF TRANSCEIVERS

IC-F3021T

With 10-keypad

IC-F3021S

Without 10-keypad

UHF TRANSCEIVERS

IC-F4021T

With 10-keypad

IC-F4021S

Without 10-keypad

DAY LMR USER

simple to use but versatile rich weight body, many attractive features, large capacity Lithium-Ion coverage are built-in. This rugged expectations with reliable performance.

8 programmable buttons

The [P0]–[P3], [▲], [▼], [Monitor] and [Red] buttons are programmable to meet specific needs. The [Red] button on the top panel can be assigned as an emergency trigger.

Alphanumeric display

The 8-character alphanumeric display shows channel, zone, tone code and scanning channel names on the display. A separate row of operational icons indicate battery, signal strength, RX/TX and other radio conditions.

Wide frequency coverage

The IC-F3021 series covers a wide frequency range with one version (136–174, 400–470, 450–512 (520) MHz). Wide and narrow channel spacing (25, 12.5kHz) is programmable per channel.

Optional board

The IC-F3021 series has a 40-pin expansion socket for adding an optional board. A voice scrambler provides secure conversation and the DTMF decoder features has ANI capability, depending on the installed board.

Optional VOX headset

With one of Icom's optional headsets and PTT/VOX unit, the IC-F3021 series offers hands-free operation.

Other features

- New regular charger, BC-171
- TOT function and lock out penalty timer
- 8 DTMF autodial memories
- 2 step power saver
- Surveillance function temporarily turns off the LED backlight and beep sound
- Normal and priority scan
- 500mW loud and clear audio
- Embedded ESN (Electronic serial number)

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.

BATTERY PACKS AND CASE

▲ BP-230 ▲ BP-231 ▲ BP-232 ▲ BP-240

Battery packs	Type and capacity	Operating time*	Output power (VHF/UHF)
BP-230	Li-Ion 7.4V/ 800mAh	6 hours	5W/4W
BP-231	Li-Ion 7.4V/1150mAh	9 hours	5W/4W
BP-232	Li-Ion 7.4V/2000mAh	15.5 hours	5W/4W
BP-240	AAA (LR03) batteries × 6	–	1W

* Operating time is approximate time (at 20°C). Tx: Rx: standby=5:5:90. Power save on.

REGULAR CHARGER

▲ BC-147 ▲ BC-171

BC-171 DESKTOP CHARGER + BC-147 AC ADAPTER
Charges the battery pack in 8–10 hours (approx.).

RAPID CHARGER

▲ BC-145 ▲ BC-160

BC-160 DESKTOP CHARGER + BC-145 AC ADAPTER
Charges the BP-231 in 2 hours (approx.).
BC-119N + AD-106 + BC-145 is also available. : Charges the BP-231 in 2 hours (approx.).

POWER SUPPLY CABLES

▲ CP-17L ▲ OPC-515L

CP-17L CIGARETTE LIGHTER CABLE, OPC-515L DC POWER CABLE
For use with the BC-160 or BC-119N. (12–16V DC required).

MULTI-CHARGER

▲ BC-121N+AD-106 (6 pcs.) ▲ OPC-656 ▲ BC-157

BC-121N MULTI-CHARGER + AD-106 CHARGER ADAPTER + BC-157 AC ADAPTER
Rapidly charges up to 6 battery packs (Six AD-106s are required). Charges the BP-231 in 2 hours (approx.).
OPC-656 DC POWER CABLE : For use with the BC-121N. (12–20V DC required).

BELT CLIPS AND LEATHER BELT HANGERS

▲ MB-93 ▲ MB-96F

MB-93 : Swivel type belt clip.
MB-94 : Alligator type. Same as supplied.
MB-96N : Swivel type belt hanger.
MB-96F : Fixed type belt hanger.

HEADSETS and PTT/VOX UNIT

▲ HS-94 ▲ HS-95 ▲ HS-97 ▲ VS-1L

HS-94 : Earhook headset with flexible boom microphone.
HS-95 : Behind-the-head headset with flexible boom microphone.
HS-97 : Throat microphone fits around your neck and picks up speech vibration.
VS-1L : PTT/VOX unit. Required when using these headsets with the transceiver.

SPEAKER-MICROPHONES

▲ HM-153L ▲ HM-158L ▲ HM-159L

HM-153L : Durable earphone-microphone with revolving clip.
HM-158L : Compact and durable body with screw-type connector.
HM-159L : Full size durable speaker microphone.

INTERNAL UNITS

UT-109R VOICE SCRAMBLER UNIT UT-110R VOICE SCRAMBLER UNIT UT-108R DTMF DECODER

UT-109R: Up to 32 scrambling codes are available. 40-pin type.
UT-110R: Up to 1020 scrambling codes are available. 40-pin type.
UT-108R: Provides DTMF selective call and ANI capabilities. 40-pin type.

SP-13 EARPHONE

Provides clear audio in noisy environments.

STUBBY ANTENNAS

FA-SC56VS FA-SC57VS FA-SC73US

STUBBY ANTENNAS
• **FA-SC25V**: 136–150MHz
• **FA-SC55V**: 146–174MHz
• **FA-SC25U**: 400–430MHz
• **FA-SC57U**: 430–470MHz
• **FA-SC72U**: 470–520MHz

SPECIFICATIONS

GENERAL	
• Frequency range	:
IC-F3021T/S	136–174MHz
IC-F4021T/S	400–470MHz 450–512MHz 450–520MHz
• Number of channels	: 128 channels/8 zones
• Channel spacing	: 12.5kHz/25kHz, 15kHz/30kHz
• PLL channel step	: 2.5kHz, 3.125kHz
• Antenna impedance	: 50Ω
• Usable temperature range	: -30°C to +60°C; -22°F to +140°F
• Power supply requirement	: 7.2V DC
• Current drain (at 7.2V DC; approx.):	
Transmit VHF/UHF	1.5A/1.5A (at 5W/4W)
Receive Stand-by	75mA
Rated output	250mA
• Dimensions (with BP-231)	: 53 (W) × 120 (H) × 32.5 (D) mm; (projections are not included) 2 ³ / ₃₂ (W) × 4 ²³ / ₃₂ (H) × 1 ⁹ / ₃₂ (D) in
• Weight (approx.)	: 260g; 9.2oz (with BP-231)

TRANSMITTER

• Output power	: 5W (VHF), 4W (UHF)
• Max. frequency deviation	: ±5.0/±2.5kHz (Wide/narrow)
• Frequency error	: ±2.5ppm
• Spurious emissions	: 80dB typ.
• Adjacent channel power	VHF : 80/70dB typ. (Wide/narrow) UHF : 75/68dB typ. (Wide/narrow)
• FM Hum and Noise	: 48/45dB typ. (Wide/narrow)
• Audio harmonic distortion	: 3% typ. (AF 1kHz, 40% deviation)
• Modulation limiting	: 60–100% of max. deviation
• External microphone connector :	3-conductor 2.5 (d) mm (1/16")/2.2kΩ

Measurements made in accordance with EIA/TIA-603. All stated specifications are subject to change without notice or obligation.


All trademarks are the properties of their respective holders.

RECEIVER

• Intermediate frequency	: 1st 46.35MHz 2nd 450kHz
• Sensitivity	: 0.25μV typ. (at 12dB SINAD)
• Squelch sensitivity	: 0.25μV typ. (at threshold)
• Adjacent channel selectivity	: 75/65dB typ. (Wide/narrow)
• Spurious response	: 70dB min.
• Intermodulation	: 75/74dB typ. (VHF/UHF)
• Hum and noise ratio	VHF : 55/50dB typ. (Wide/narrow) UHF : 53/48dB typ. (Wide/narrow)
• Audio output power	: 500mW typ. (at 5% distortion with an 8Ω load)
• External speaker connector	: 2-conductor 3.5 (d) mm (1/8")/8Ω

SUPPLIED ACCESSORIES

(May differ according to version)

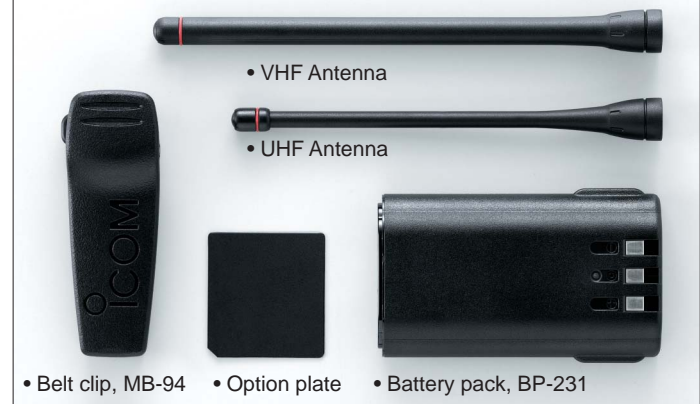

Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

2380 116th Avenue NE,
Bellevue, WA 98004, U.S.A.
Phone : +1 (425) 454-8155
Fax : +1 (425) 454-1509
E-mail : sales@icomamerica.com
URL : <http://www.icomamerica.com>

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone : +1 (604) 952-4266
Fax : +1 (604) 952-0090
E-mail : info@icomcanada.com
URL : <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.

A.B.N. 88 006 092 575
Unit 1 / 103 Garden Road,
Clayton VIC 3168 Australia
Phone : +61 (03) 9549 7500
Fax : +61 (03) 9549 7505
E-mail : sales@icom.net.au
URL : <http://www.icom.net.au>

Icom New Zealand

146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone : +64 (09) 274 4062
Fax : +64 (09) 274 4708
E-mail : inquiries@icom.co.nz
URL : <http://www.icom.co.nz>

Icom (Europe) GmbH

Communication Equipment
Himmelgeister Str. 100,
D-40225 Düsseldorf, Germany
Phone : +49 (0211) 336047
Fax : +49 (0211) 333639
E-mail : info@icomeurope.com
URL : <http://www.icomeurope.com>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"
08190, Sant Cugat del Valles, Barcelona, Spain
Phone : +34 (93) 590 26 70
Fax : +34 (93) 589 04 46
E-mail : icom@icomspain.com
URL : <http://www.icomspain.com>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay,
Kent, CT6 8LD, U.K.
Phone : +44 (01227) 741741
Fax : +44 (01227) 741742
E-mail : info@icomuk.co.uk
URL : <http://www.icomuk.co.uk>

Icom France S.a

Zac de la Plaine, 1,
Rue Brindejonc des Moulinais BP 5804,
31505 Toulouse Cedex, France
Phone : +33 (5) 61 36 03 03
Fax : +33 (5) 61 36 03 00
E-mail : icom@icom-france.com
URL : <http://www.icom-france.com>

Icom Polska

Sopot, 3 maja 54, Poland
Phone : +48 (58) 550 7135
Fax : +48 (58) 551 0484
E-mail : icompolska@icompolska.com.pl
URL : <http://www.icompolska.com.pl>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone : +886 (02) 2559 1899
Fax : +886 (02) 2559 1874
E-mail : sales@asia-icom.com
URL : <http://www.asia-icom.com>

Beijing Icom Ltd.

10C07, Long Silver Mansion, No.88, Yong Ding
Road, Haidian District, Beijing, 100039, China
Phone : +86 (010) 5889 5391/5392/5393
Fax : +86 (010) 5889 5395
E-mail : bjicom@bjicom.com
URL : <http://www.bjicom.com>

Your local distributor/dealer: