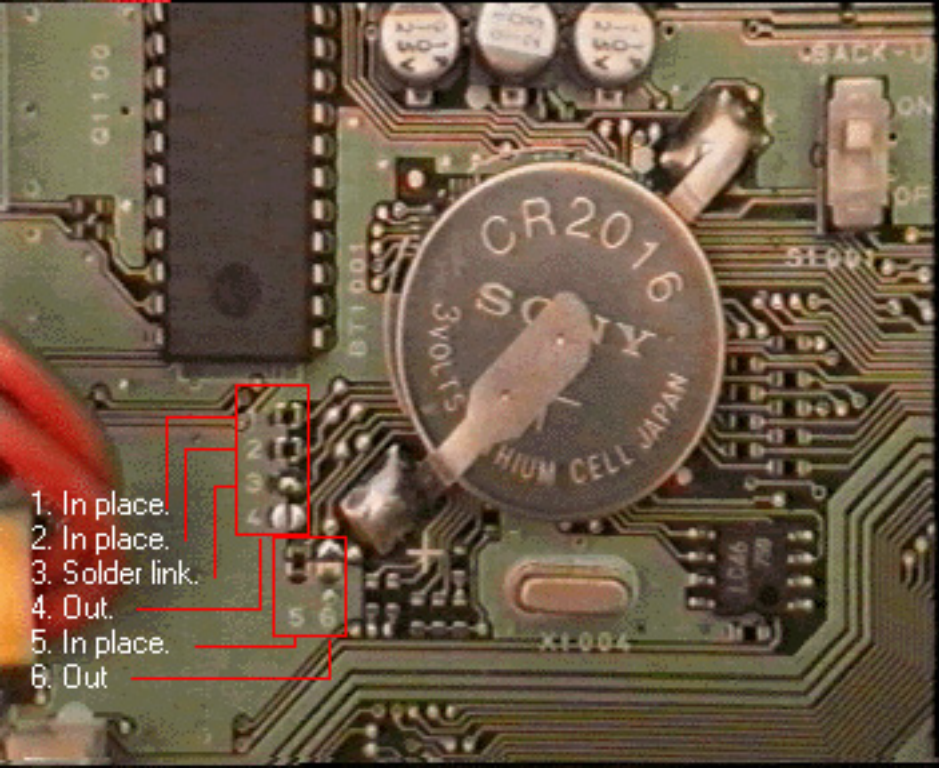


- 
1. In place.
 2. In place.
 3. Solder link.
 4. Out.
 5. In place.
 6. Out

TX Frequency Range			RX Frequency Range				Jumpers						Remarks	
HF	VHF	UHF	HF	VHF(M)	VHF	UHF	1	2	3	4	5	6	FM CH Step	RPT Shift
1	144-146	430-450	0.1-30 50-54		144-146	430-450	X			X	X	X	5/20kHz	0.6/5 MHz
1	144-148	430-450	0.1-37 37-76		108-174	420-512	X				X	X	5/20kHz	0.6/5 MHz
2	140-154	420-450	0.1-37 37-76		108-174	420-512	X					X	5/20kHz	0.6/5 MHz
3	144-146	430-440	0.1-30 50-54		144-146	430-440		X		X	X	X	12.5/25kHz	0.6/7.5 MHz
3	144-146	430-440	0.1-37 37-76		108-174	420-512		X			X	X	12.5/25kHz	0.6/7.5 MHz
2	140-154	420-450	0.1-37 37-76		108-174	420-512		X				X	12.5/25kHz	0.6/7.5 MHz
4	144-146	430-440	0.1-30 50-54	70.00-70.50	144-146	430-440	X	X		X	X	X	12.5/25kHz	0.6/1.6 MHz
4	144-146	430-440	0.1-37 37-76		108-174	420-512	X	X			X	X	12.5/25kHz	0.6/1.6 MHz
5	140-154	420-450	0.1-37 37-76		108-174	420-512	X	X				X	12.5/25kHz	0.6/1.6 MHz
6	144-146	432-438	0.1-30 50-54		144-148	432-438			X	X	X	X	12.5/25kHz	0.6/1.6 MHz
6	144-146	432-438	0.1-37 37-76		108-174	420-512			X		X	X	12.5/25kHz	0.6/1.6 MHz

7	144-148	430-450	0.1-30 50-54	144-148	430-450	X		X	X	X	X	5/25kHz	0.6/5 MHz
7	144-148	430-450	0.1-37 37-76	108-174	420-512	X		X		X	X	5/25kHz	0.6/5 MHz
8	144-146	430-440	0.1-30 50-54	144-146	430-440		X	X	X	X	X	12.5/25kHz	0.6/1.6 MHz
8	144-146	430-440	0.1-37 37-76	108-174	420-512		X	X		X	X	12.5/25kHz	0.6/1.6 MHz
2	140-154	420-450	0.1-37 37-76	108-174	420-512		X	X			X	12.5/25kHz	0.6/1.6 MHz