

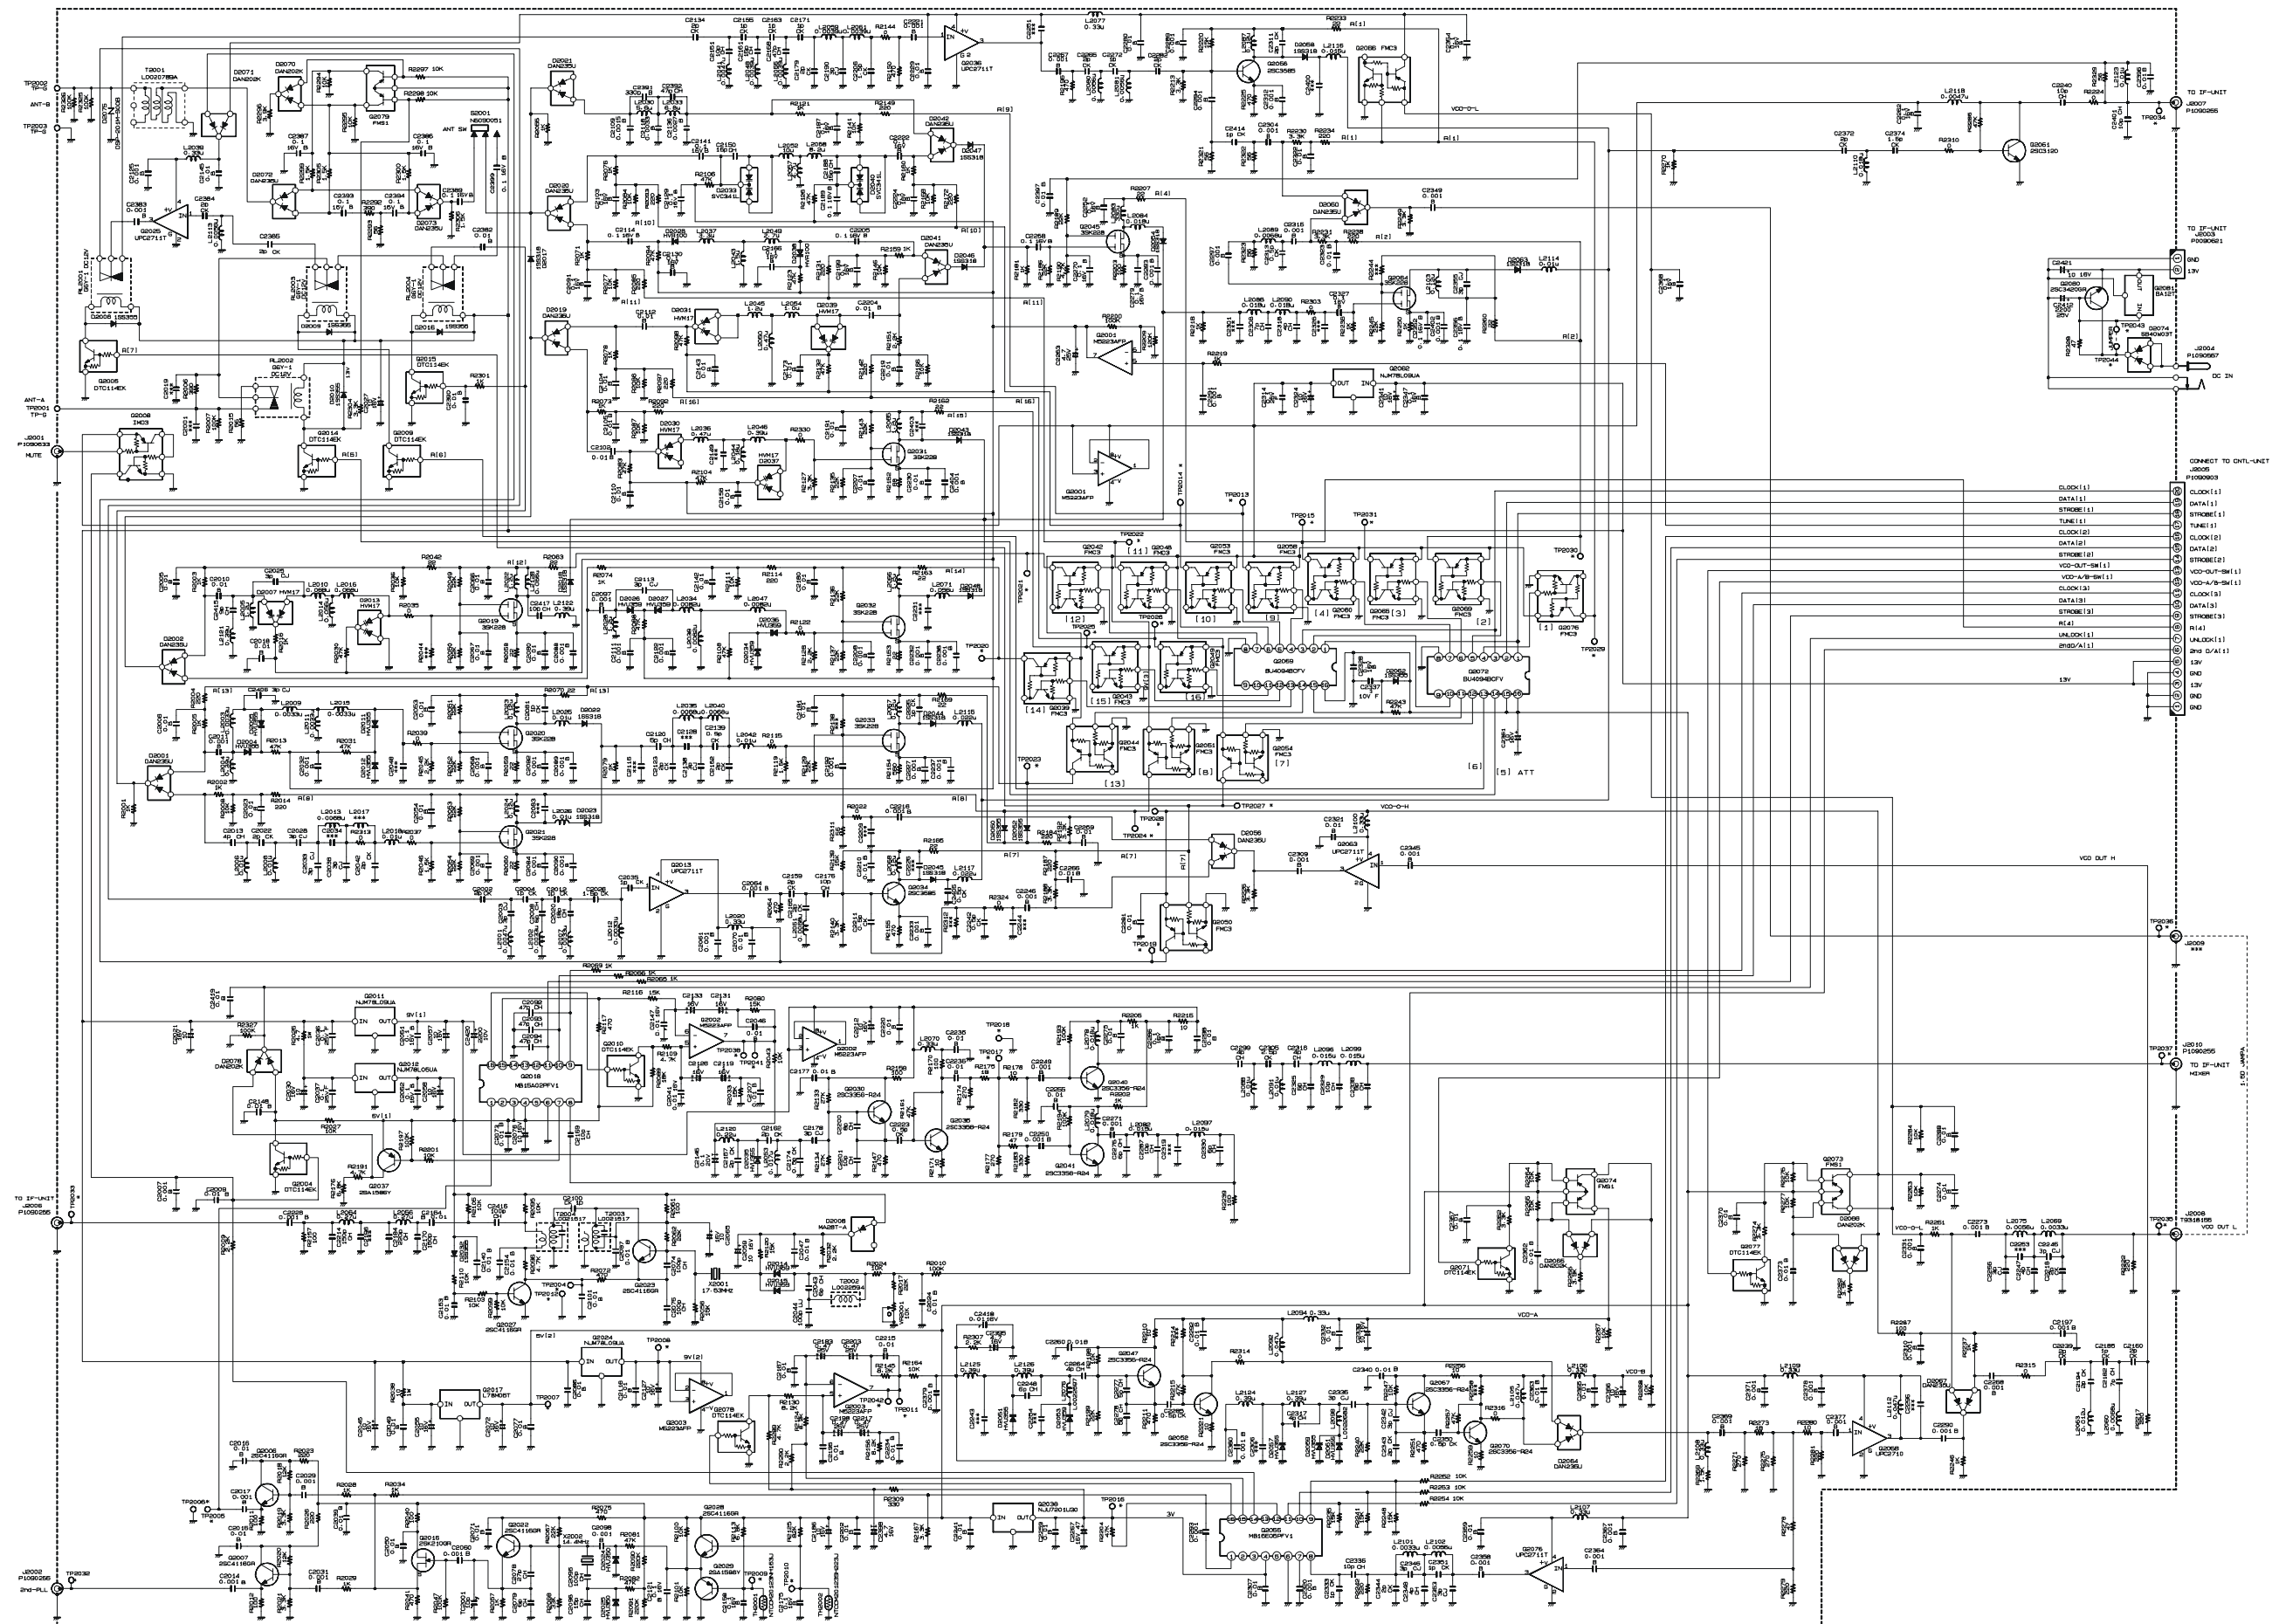


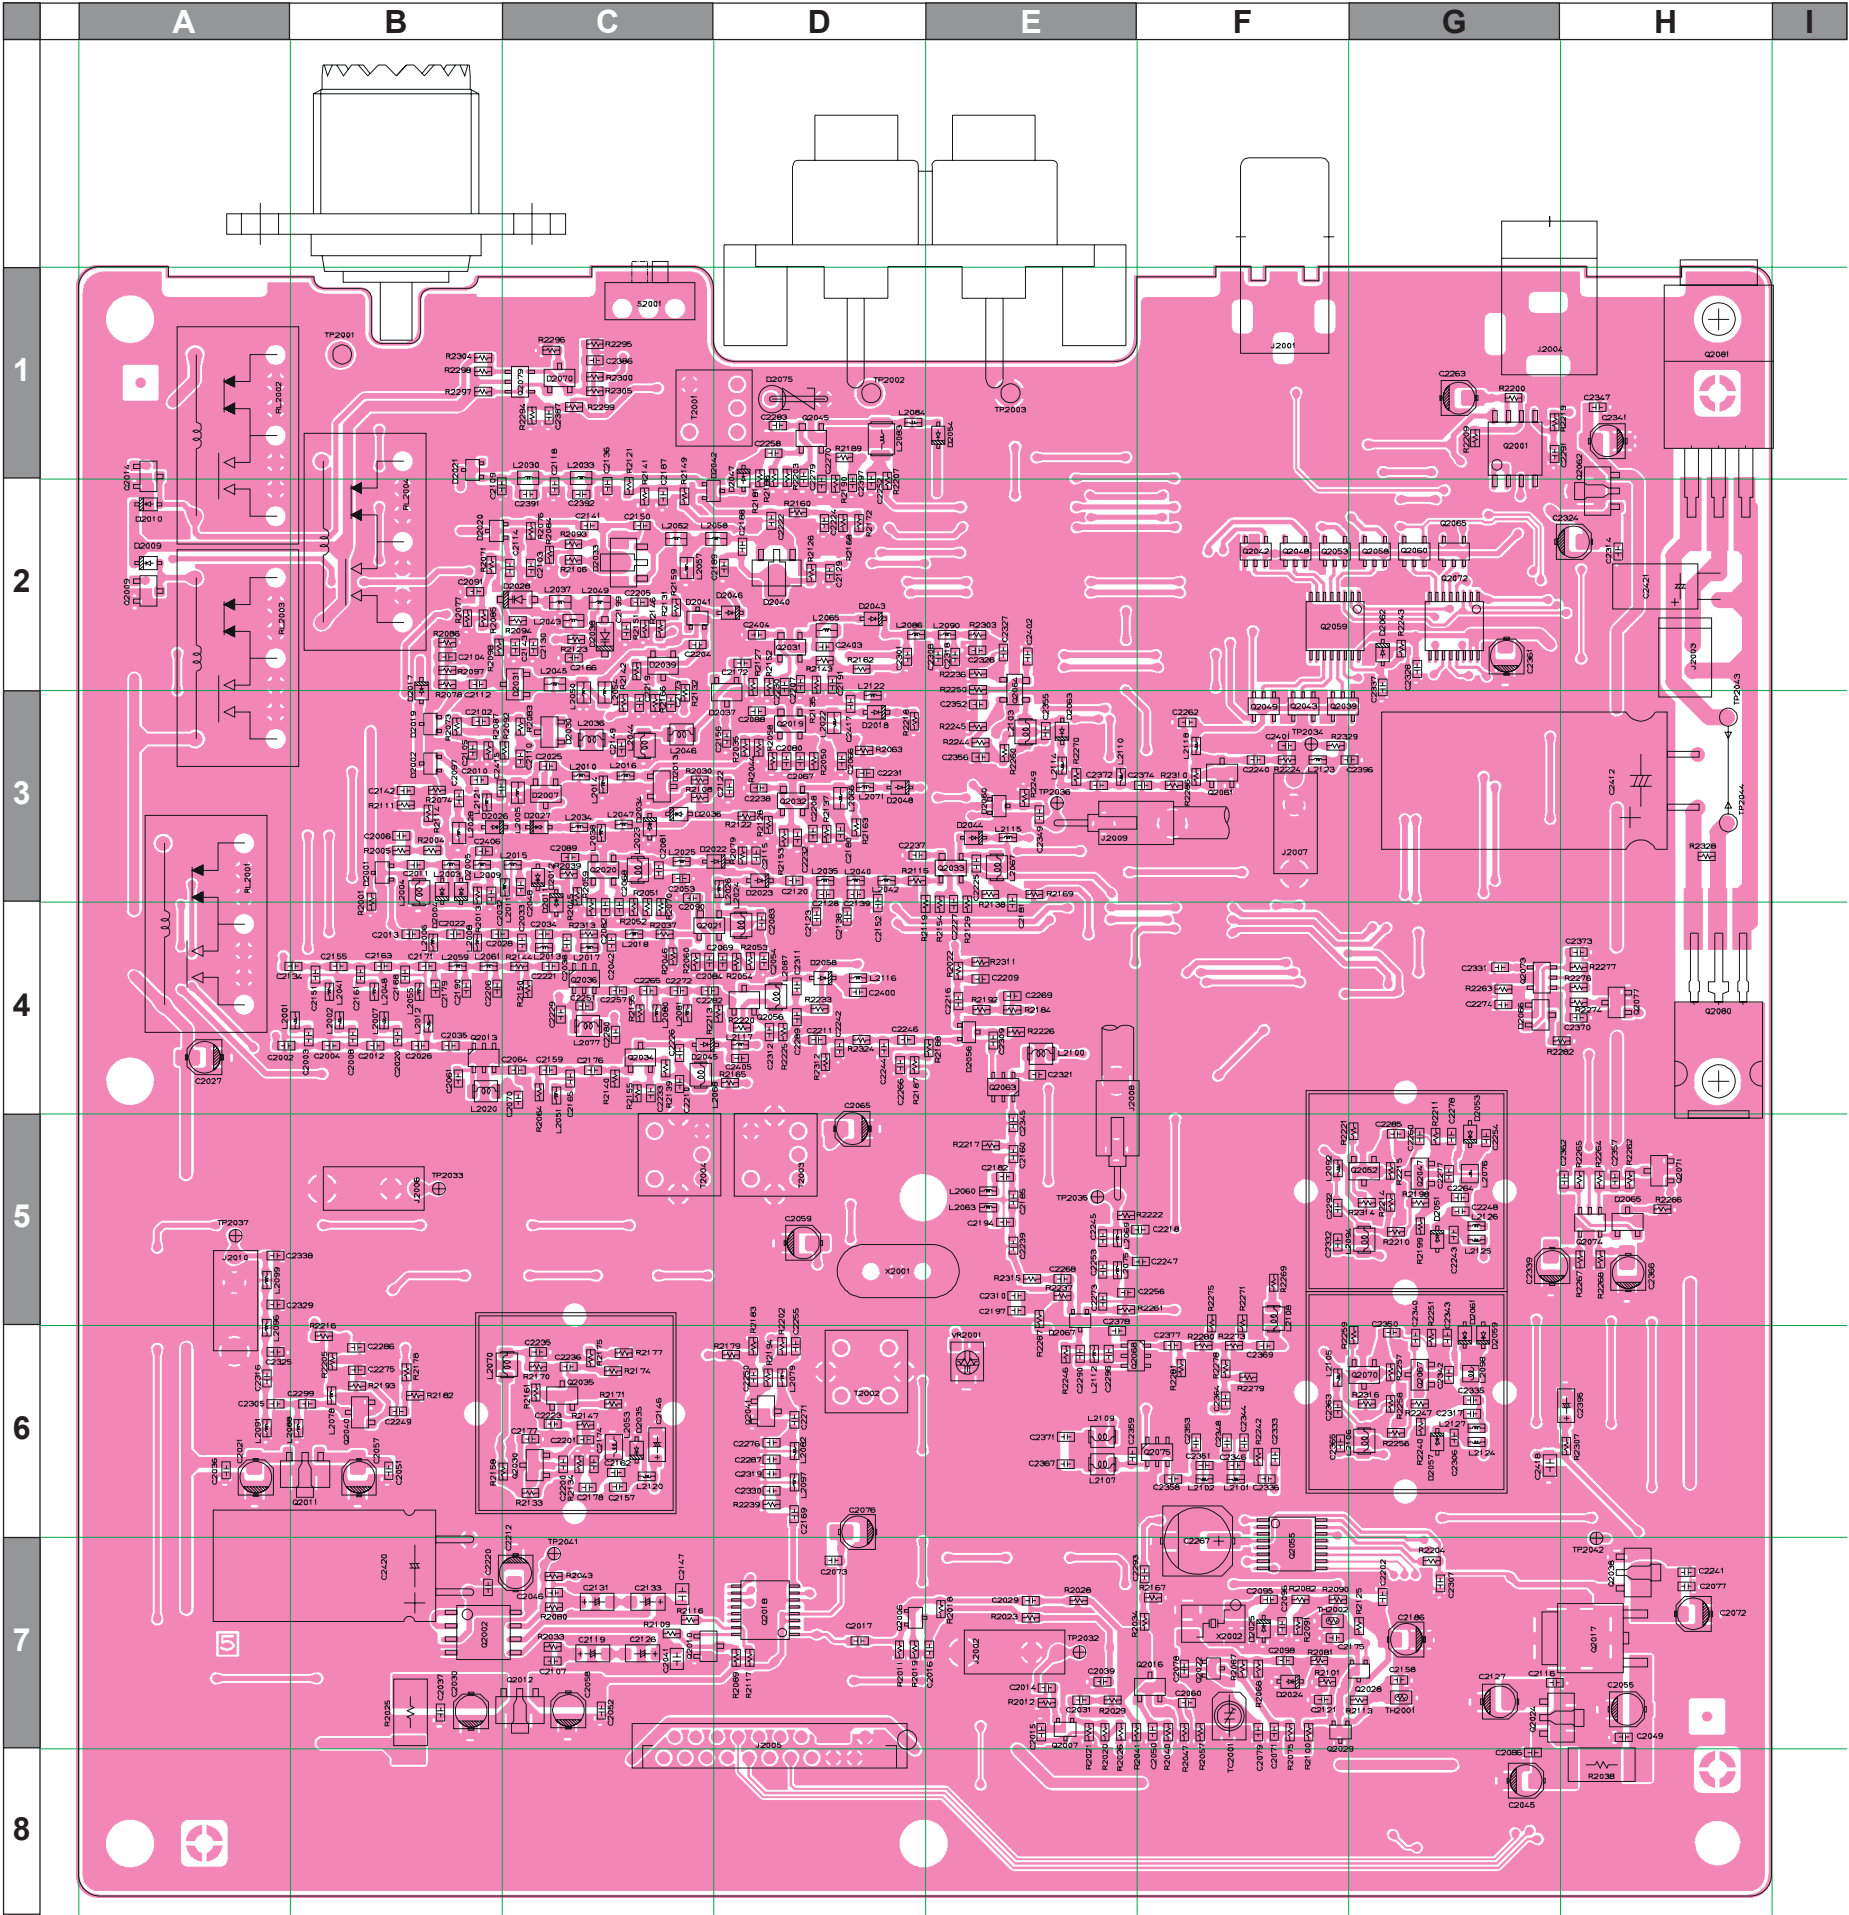


RF Unit (Lot. 1 ~ 60)

Note

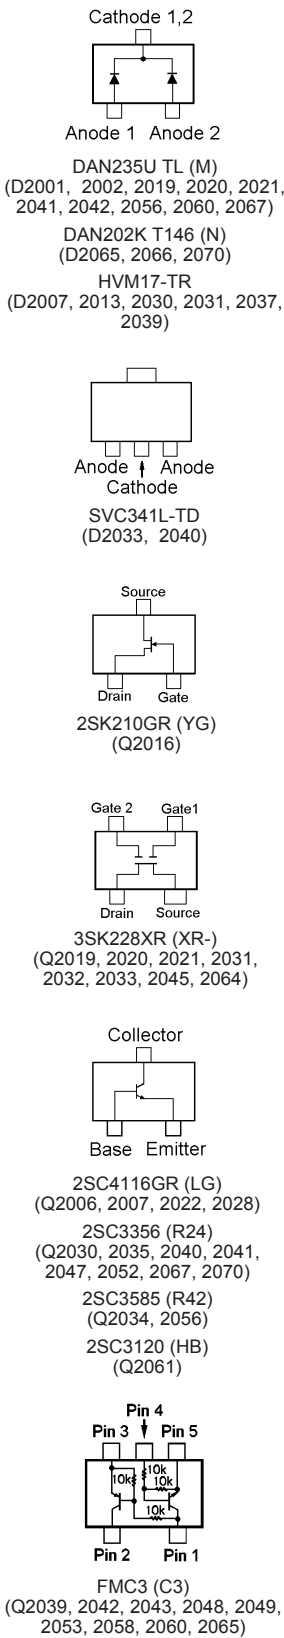

RF Unit (Lot. 1 ~ 60)
Parts Layout (Side A)

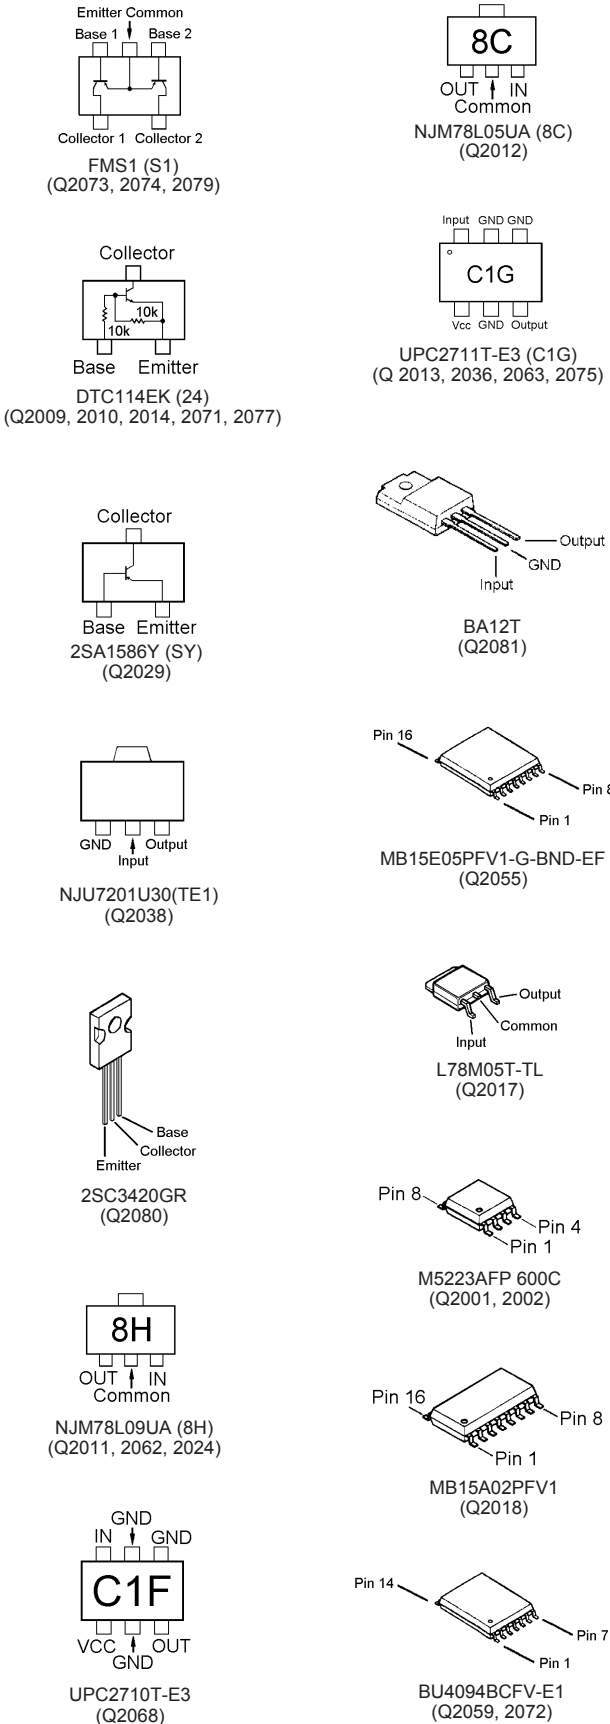

RF Unit (Lot. 1 ~ 60)

Parts Layout (Side B)

2SC4116GR (LG)
(Q2023, 2027)

2SA1586Y (SY)
(Q2037)





DTC114EK (24)
(Q2004, 2005, 2015, 2078)

IMD3 (D3)
(Q2008)

UPC2711T-E3 (C1G)
(Q2025)

FMC3 (C3)
(Q2044, 2050, 2051, 2054, 2066, 2069, 2076)

M5223AFP 600C
(Q2003)

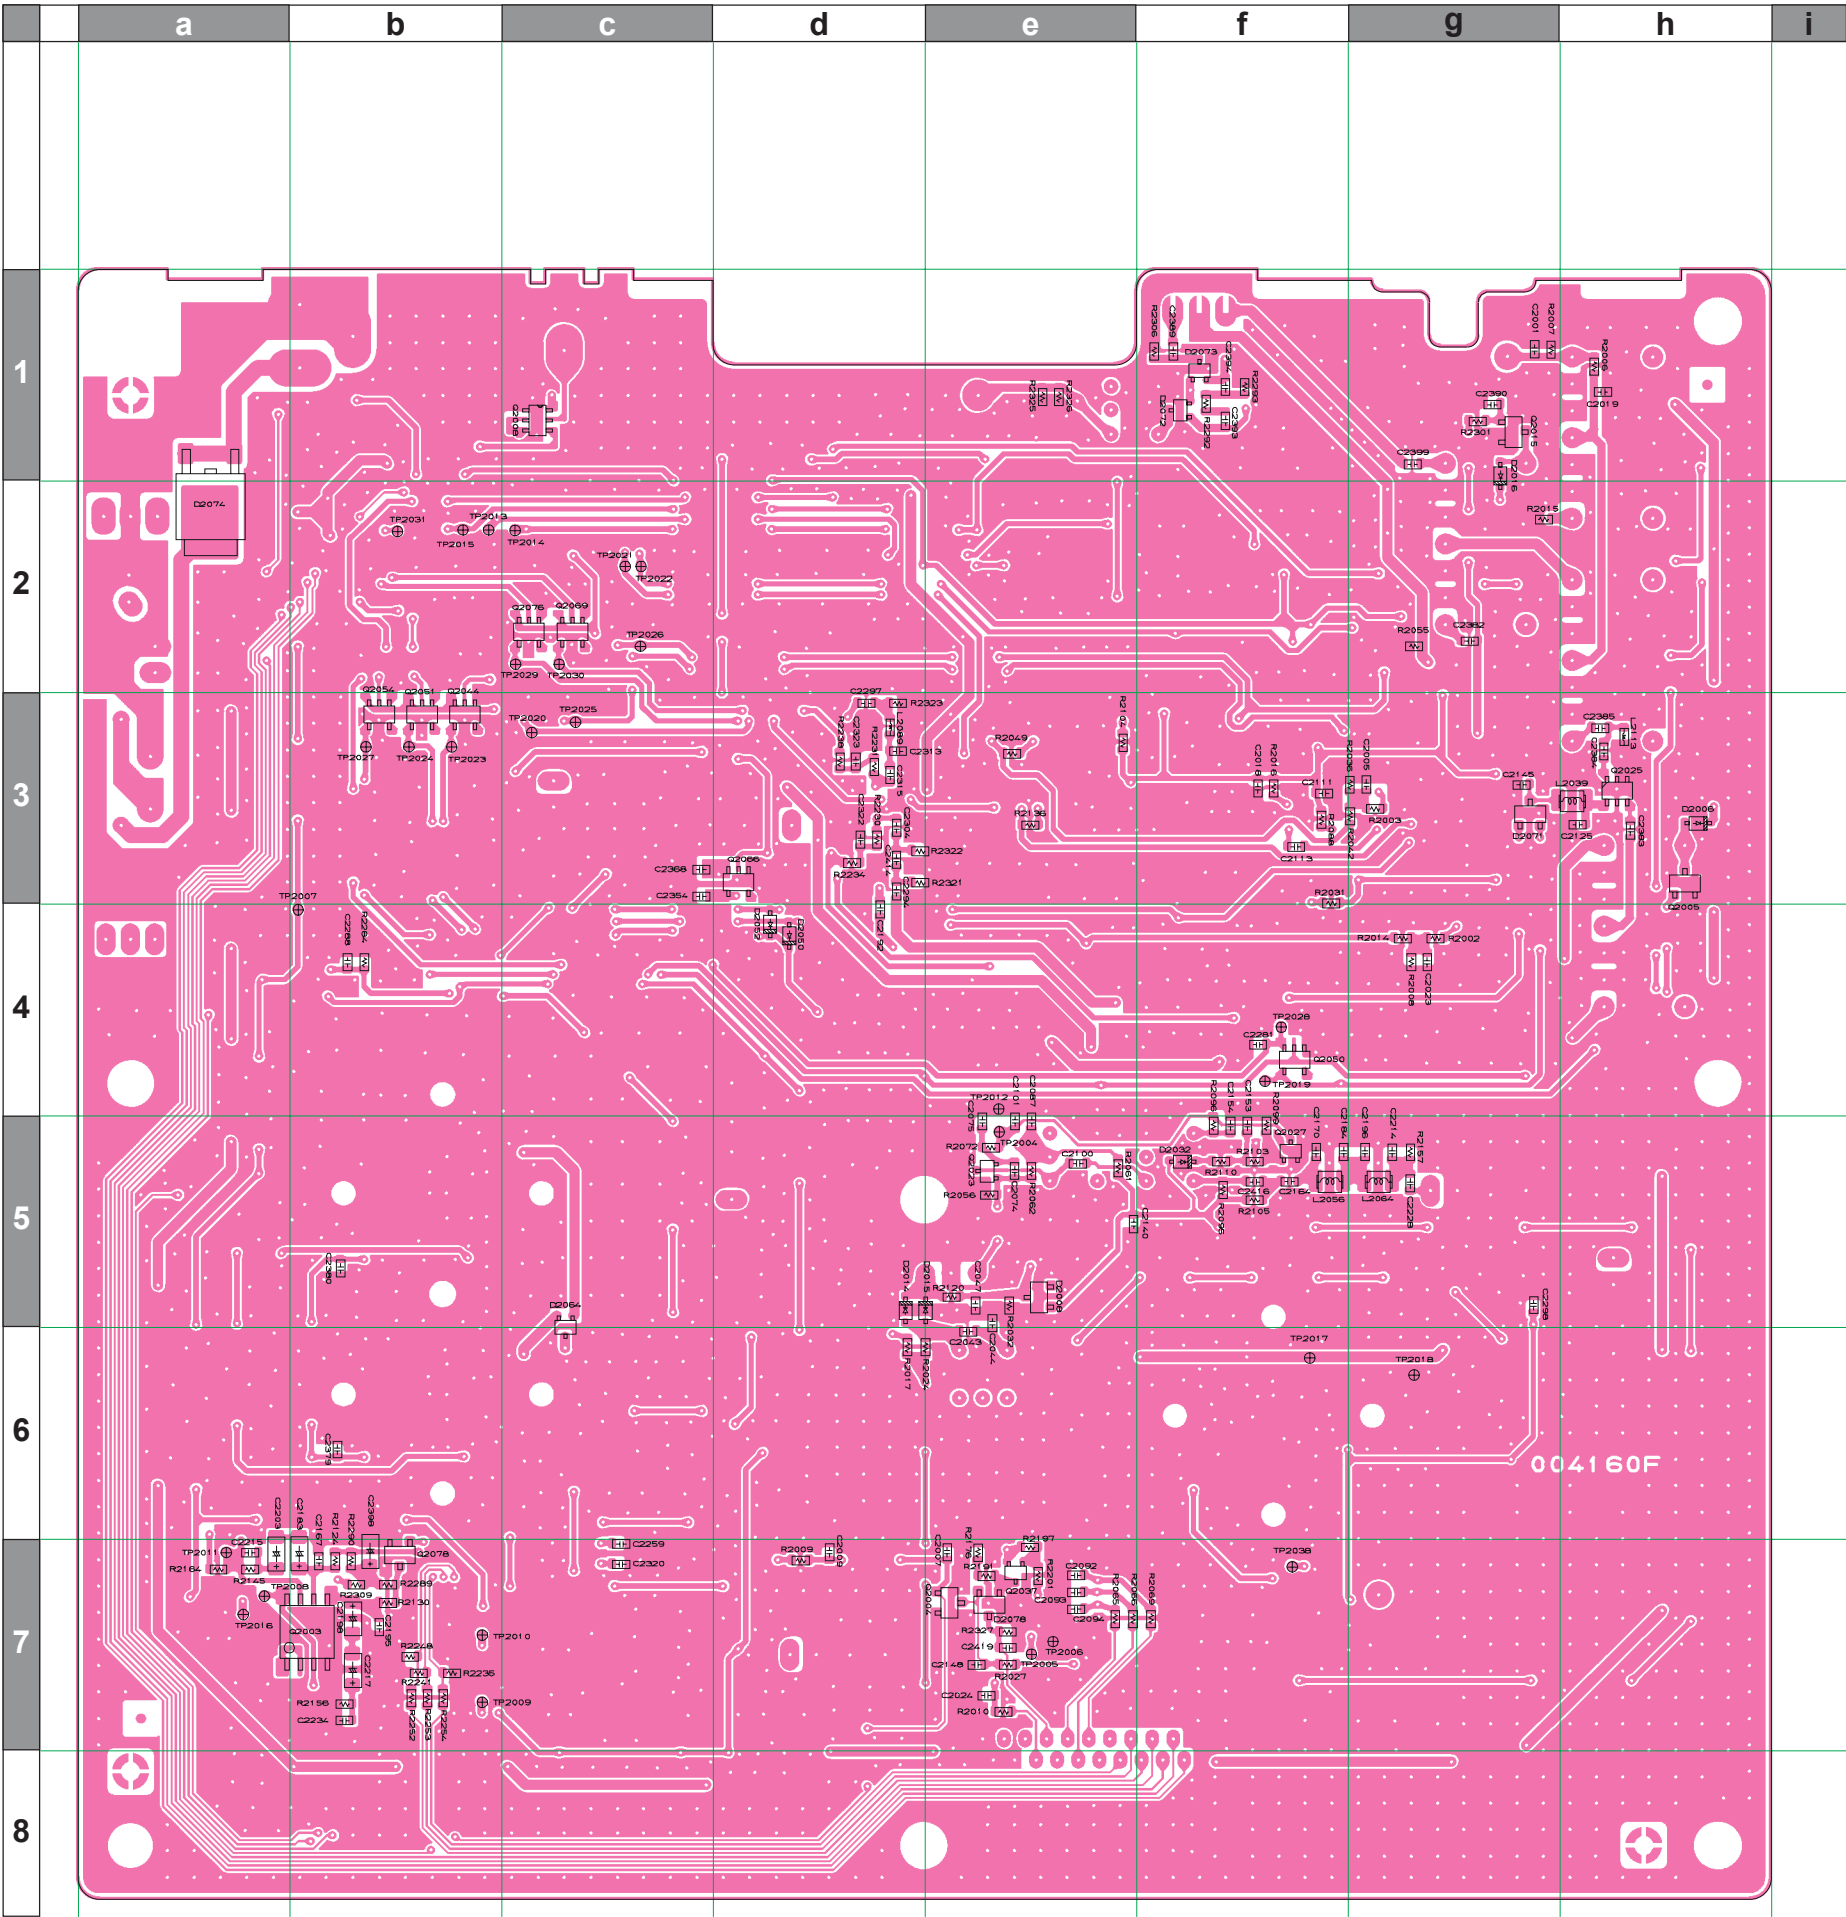


















Downloaded by
RadioManual.EU

RF Unit (Lot. 61 ~)










Note

RF Unit (Lot. 61 ~)

Parts Layout (Side A)

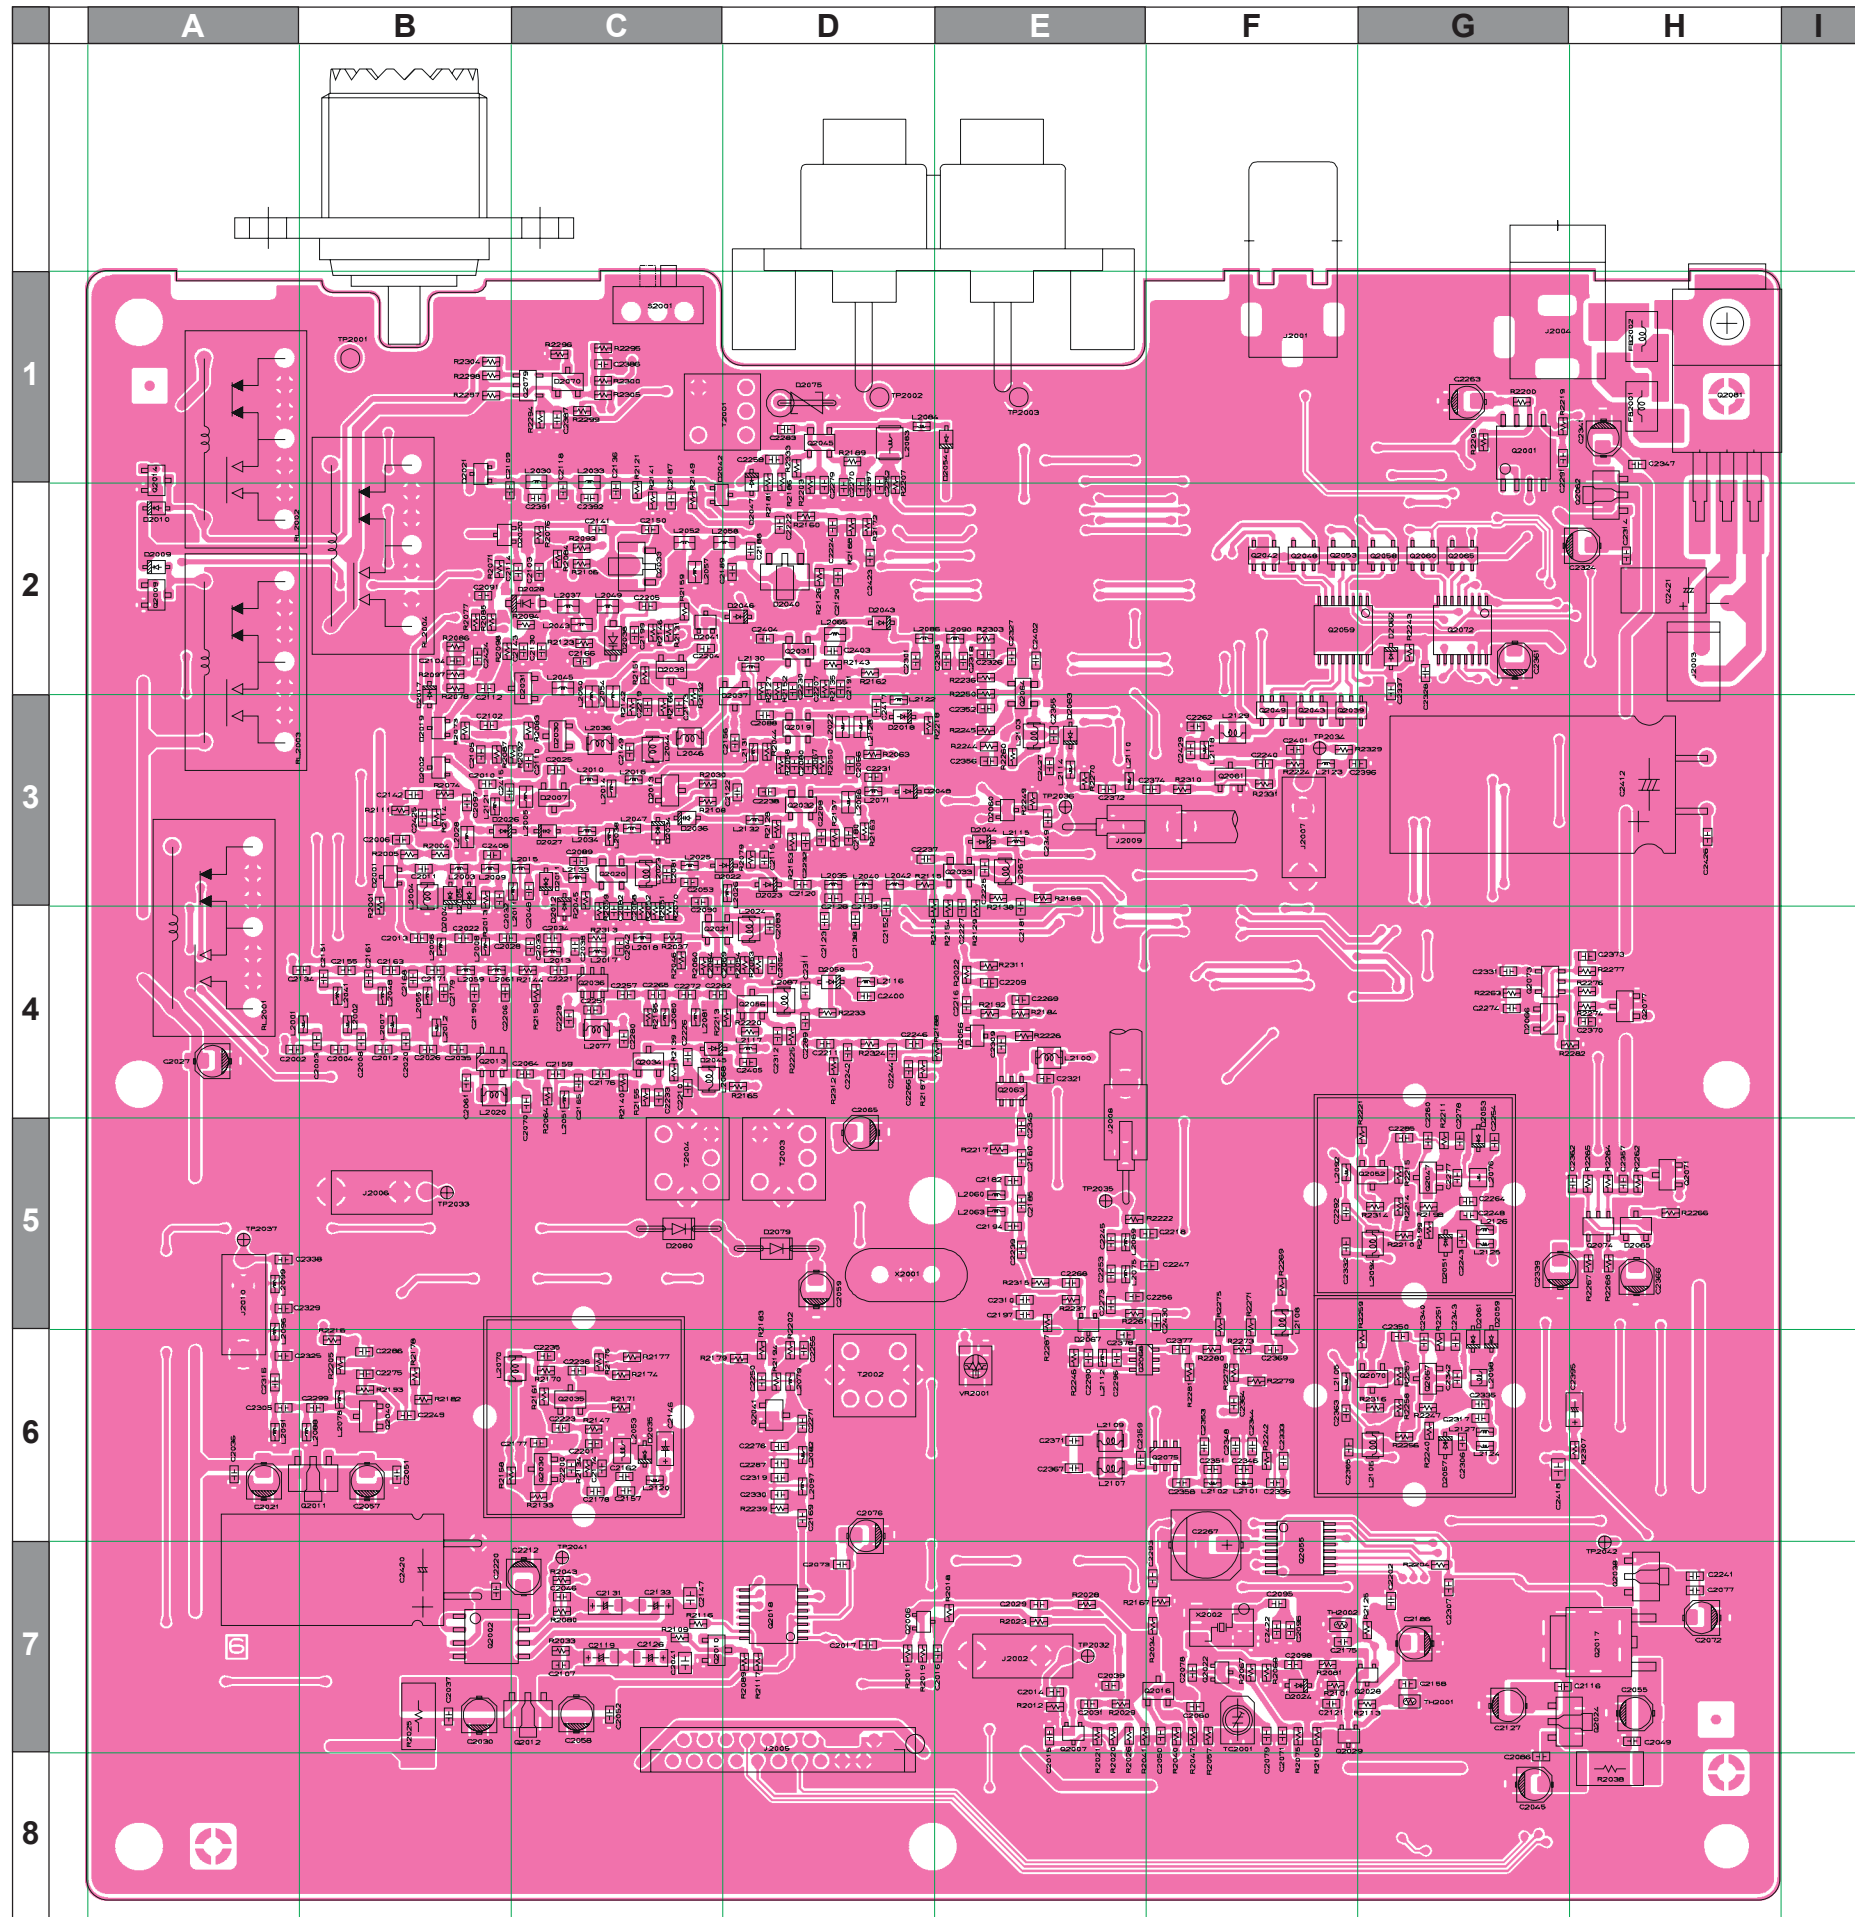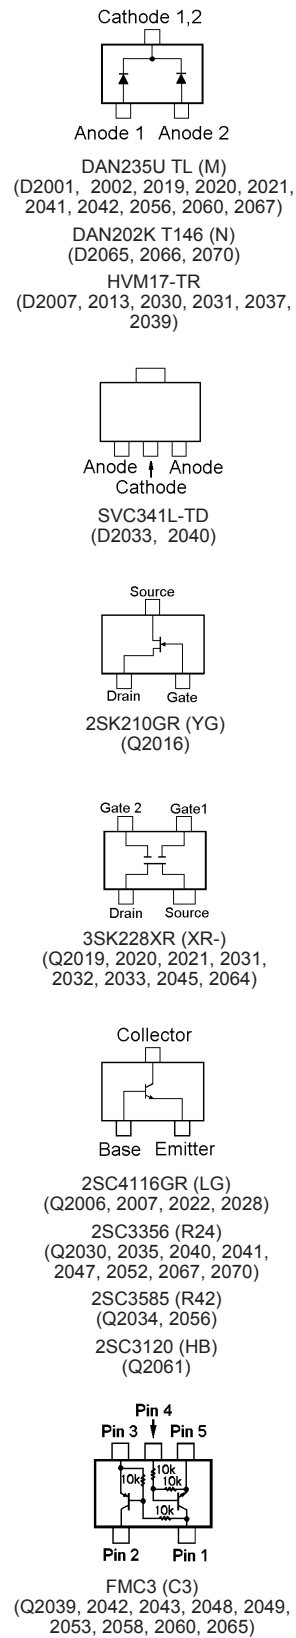

Parts Layout (Side B)



REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
PCB with Components						CB0907003	PA-28B CE: OFF			
						CB0907004	PA-28C CE: OFF			
						CB0907005	PA-28U CE: ON			
						CB0907006	PA-28A CE: OFF			
						CB0907007	PA-28U CE: ON			
Printed Circuit Board						FR004160F		1-		
						FR004160G		61-		
C 2002	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	A4
C 2003	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	B4
C 2004	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		1-	A	B4
C 2005	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	g3
C 2006	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	B3
C 2007	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	e7
C 2008	CHIP CAP.	6pF	50V	CH	GRM1882C1H6R0DZ01D	K22174207		1-	A	B4
C 2009	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	d7
C 2010	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	B3
C 2011	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	B3
C 2012	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		1-	A	B4
C 2013	CHIP CAP.	4pF	50V	CH	GRM1882C1H4R0CZ01D	K22174205		1-	A	B4
C 2014	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E7
C 2015	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	E7
C 2016	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	E7
C 2017	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	D7
C 2018	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	f3
C 2020	CHIP CAP.	18pF	50V	CH	GRM1882C1H180JA01D	K22174217		1-	A	B4
C 2021	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	A6
C 2021	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	A6
C 2022	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	B4
C 2023	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	g4
C 2024	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	e7
C 2025	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	C3
C 2026	CHIP CAP.	1.5pF	50V	CK	GRM1884C1H1R5CZ01D	K22174258		1-	A	B4
C 2027	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	A4
C 2027	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	A4
C 2028	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	B4
C 2029	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E7
C 2030	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	B7
C 2030	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	B7
C 2031	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E7
C 2032	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	B3
C 2033	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	C4
C 2035	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		1-	A	B4
C 2036	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	A6
C 2036	CHIP CAP.	0.1uF	25V	F	GRM188F11E104ZA01D	K22145001		3-	A	A6
C 2037	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	B7
C 2037	CHIP CAP.	0.1uF	25V	F	GRM188F11E104ZA01D	K22145001		3-	A	B7
C 2038	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	C4
C 2039	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	E7
C 2041	FILM CAP.	0.01uF	50V		NNM103K50	K50170039		1-	A	C7
C 2041	FILM CAP.	0.01uF	16V		ECHU1C103JB5	K57120007		3-	A	C7
C 2041	FILM CAP.	0.01uF	16V		ECHU1C103JX5	K57120030		70-	A	C7
C 2042	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	C4
C 2043	CHIP CAP.	6pF	50V	CH	GRM1882C1H6R0DZ01D	K22174207		1-	B	e6
C 2044	CHIP CAP.	100pF	50V	UJ	GRM1883U1H101JZ01D	K22174332		1-	B	e5
C 2045	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	G8
C 2045	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	G8
C 2046	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	C7
C 2047	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	e5
C 2049	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	H7
C 2050	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	F7
C 2051	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	B6
C 2051	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	B6
C 2052	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	C7
C 2052	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	C7
C 2053	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	C3

RF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 2054	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D4
C 2055	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	H7
C 2055	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	H7
C 2057	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	B6
C 2057	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	B6
C 2058	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	C7
C 2058	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	C7
C 2059	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	D5
C 2059	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	D5
C 2060	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	F7
C 2060	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		3-	A	F7
C 2061	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	B4
C 2064	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	C4
C 2065	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	D5
C 2065	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	D5
C 2066	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D3
C 2067	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D3
C 2068	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	C4
C 2069	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	D4
C 2070	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	C4
C 2071	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	F7
C 2072	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	H7
C 2072	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	H7
C 2073	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D7
C 2074	CHIP CAP.	100pF	50V	CH	GRM1882C1H101JA01D	K22174235		1-	B	e5
C 2075	CHIP CAP.	100pF	50V	CH	GRM1882C1H101JA01D	K22174235		1-	B	e5
C 2076	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	D6
C 2076	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	D6
C 2077	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	H7
C 2078	CHIP CAP.	33pF	50V	CH	GRM1882C1H330JA01D	K22174223		1-	A	F7
C 2078	CHIP CAP.	27pF	50V	UJ	GRM1883U1H270JZ01D	K22174318		3-	A	F7
C 2079	CHIP CAP.	6pF	50V	CH	GRM1882C1H6R0DZ01D	K22174207		1-	A	F7
C 2079	CHIP CAP.	6pF	50V	UJ	GRM1883U1H6R0DZ01D	K22174306		3-	A	F7
C 2080	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D3
C 2081	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		1-	A	C3
C 2082	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	C4
C 2084	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	C4
C 2086	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	G8
C 2087	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	e5
C 2088	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	D3
C 2089	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	C3
C 2090	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	C3
C 2091	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	B2
C 2091	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	B2
C 2092	CHIP CAP.	47pF	50V	CH	GRM1882C1H470JA01D	K22174227		1-	B	e7
C 2093	CHIP CAP.	47pF	50V	CH	GRM1882C1H470JA01D	K22174227		1-	B	e7
C 2094	CHIP CAP.	47pF	50V	CH	GRM1882C1H470JA01D	K22174227		1-	B	e7
C 2095	CHIP CAP.	100pF	50V	CH	GRM1882C1H101JA01D	K22174235		1-	A	F7
C 2095	CHIP CAP.	100pF	50V	UJ	GRM1883U1H101JZ01D	K22174332		3-	A	F7
C 2096	CHIP CAP.	15pF	50V	CH	GRM1882C1H150JA01D	K22174215		1-	A	F7
C 2096	CHIP CAP.	18pF	50V	CH	GRM1882C1H180JA01D	K22174217		3-	A	F7
C 2096	CHIP CAP.	22pF	50V	CH	GRM1882C1H220JA01D	K22174219		5-	A	F7
C 2097	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	B3
C 2098	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	F7
C 2098	CHIP CAP.	100pF	50V	UJ	GRM1883U1H101JZ01D	K22174332		3-	A	F7
C 2100	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		1-	B	e5
C 2101	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	e5
C 2102	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	B3
C 2103	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	C2
C 2103	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	C2
C 2104	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	B2
C 2105	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	B3
C 2106	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-2		
C 2107	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	C7
C 2108	CHIP CAP.	8pF	50V	CH	GRM1882C1H8R0DZ01D	K22174209		1-2		

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 2109	CHIP CAP.	0.0015uF	50V	B	GRM188B11H152KA01D	K22174811		1-	A	C2
C 2110	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	C3
C 2111	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	f3
C 2112	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	B2
C 2113	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	B	f3
C 2114	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	C2
C 2114	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	C2
C 2116	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	G7
C 2117	CHIP CAP.	10pF	50V	CH	GRM1882C1H100JA01D	K22174211		1-2		
C 2118	CHIP CAP.	0.0033uF	50V	B	GRM188B11H332KA01D	K22174815		1-	A	C2
C 2119	CHIP TA.CAP.	1uF	16V		TEESVA1C105M8R	K78120009		1-	A	C7
C 2120	CHIP CAP.	5pF	50V	CH	GRM1882C1H5R0CZ01D	K22174206		1-	A	D3
C 2121	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	F7
C 2121	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	F7
C 2122	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	D3
C 2123	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	D4
C 2125	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	h3
C 2126	CHIP TA.CAP.	1uF	16V		TEESVA1C105M8R	K78120009		1-	A	C7
C 2127	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	G7
C 2127	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	G7
C 2129	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	D2
C 2129	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	D2
C 2130	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	C2
C 2130	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	C2
C 2131	CHIP TA.CAP.	1uF	16V		TEESVA1C105M8R	K78120009		1-	A	C7
C 2133	CHIP TA.CAP.	1uF	16V		TEESVA1C105M8R	K78120009		1-	A	C7
C 2134	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	B4
C 2136	CHIP CAP.	0.0027uF	50V	B	GRM188B11H272KA01D	K22174814		1-	A	C2
C 2138	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	D4
C 2139	CHIP CAP.	0.5pF	50V	CK	GRM1884C1HR50CZ01D	K22174201		1-	A	D3
C 2140	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	f5
C 2141	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	C2
C 2141	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	C2
C 2142	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	B3
C 2143	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	C2
C 2145	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	g3
C 2146	CHIP TA.CAP.	0.1uF	20V		TEESVA21D104M8R	K78130020		1-	A	C6
C 2147	FILM CAP.	0.01uF	50V		NNM103K50	K50170039		1-	A	C7
C 2147	FILM CAP.	0.01uF	16V		ECHU1C103JB5	K57120007		3-	A	C7
C 2147	FILM CAP.	0.01uF	16V		ECHU1C103JX5	K57120030		70-	A	C7
C 2148	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	e7
C 2150	CHIP CAP.	15pF	50V	CH	GRM1882C1H150JA01D	K22174215		1-	A	C2
C 2151	CHIP CAP.	10pF	50V	CH	GRM1882C1H100JA01D	K22174211		1-	A	B4
C 2152	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	D4
C 2153	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	f5
C 2154	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	f5
C 2155	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		1-	A	B4
C 2156	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D3
C 2157	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	C6
C 2158	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	G7
C 2158	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	G7
C 2159	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	C4
C 2160	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	E5
C 2161	CHIP CAP.	15pF	50V	CH	GRM1882C1H150JA01D	K22174215		1-	A	B4
C 2162	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	C6
C 2163	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		1-	A	B4
C 2164	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	f5
C 2165	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	C4
C 2166	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	C2
C 2166	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	C2
C 2167	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	b7
C 2168	CHIP CAP.	47pF	50V	CH	GRM1882C1H470JA01D	K22174227		1-	A	B4
C 2169	CHIP CAP.	10pF	50V	CH	GRM1882C1H100RZ01D	K22174248		1-	A	D6
C 2170	CHIP CAP.	150pF	50V	CH	GRM1882C1H151JA01D	K22174239		1-	B	f5
C 2171	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		1-	A	B4

RF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 2172	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-2		
C 2173	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	C3
C 2174	CHIP CAP.	0.5pF	50V	CK	GRM1884C1HR50CZ01D	K22174201		1-	A	C6
C 2175	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	F7
C 2175	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	F7
C 2176	CHIP CAP.	10pF	50V	CH	GRM1882C1H100JA01D	K22174211		1-	A	C4
C 2177	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	C6
C 2178	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	C6
C 2179	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	B4
C 2180	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D3
C 2181	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	E4
C 2182	CHIP CAP.	7pF	50V	CH	GRM1882C1H7R0DZ01D	K22174208		1-	A	E5
C 2183	CHIP TA.CAP.	0.47uF	25V		TEESVA1E474M8R	K78140009		1-	B	b7
C 2184	CHIP CAP.	220pF	50V	CH	GRM1882C1H221JA01D	K22174243		1-	B	f5
C 2185	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		1-	A	E5
C 2186	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	G7
C 2186	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	G7
C 2187	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	C2
C 2187	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	C2
C 2188	CHIP CAP.	15pF	50V	CH	GRM1882C1H150JA01D	K22174215		1-	A	D2
C 2189	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	D2
C 2189	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	D2
C 2190	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	B4
C 2191	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D2
C 2192	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-60		
C 2194	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	E5
C 2195	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	b7
C 2197	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E5
C 2198	CHIP TA.CAP.	0.47uF	25V		TEESVA1E474M8R	K78140009		1-	B	b7
C 2199	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	C2
C 2199	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	C2
C 2200	CHIP CAP.	8pF	50V	CH	GRM1882C1H8R0DZ01D	K22174209		1-	A	C6
C 2201	CHIP CAP.	10pF	50V	CH	GRM1882C1H100RZ01D	K22174248		1-	A	C6
C 2202	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	G7
C 2203	CHIP TA.CAP.	0.47uF	25V		TEESVA1E474M8R	K78140009		1-	B	a7
C 2204	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	C2
C 2205	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	C2
C 2205	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	C2
C 2206	CHIP CAP.	1.5pF	50V	CK	GRM1884C1H1R5CZ01D	K22174258		1-	A	B4
C 2207	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D2
C 2208	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	D3
C 2210	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	C4
C 2211	CHIP CAP.	0.5pF	50V	CK	GRM1884C1HR50CZ01D	K22174201		1-	A	D4
C 2212	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	C7
C 2212	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	C7
C 2214	CHIP CAP.	150pF	50V	CH	GRM1882C1H151JA01D	K22174239		1-	B	g5
C 2215	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	a7
C 2216	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E4
C 2216	CHIP CAP.	15pF	50V	CH	GRM1882C1H150JA01D	K22174215		61-	A	E4
C 2217	CHIP TA.CAP.	0.47uF	25V		TEESVA1E474M8R	K78140009		1-	B	b7
C 2218	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-5	A	F5
C 2218	CHIP CAP.	4pF	50V	CH	GRM1882C1H4R0CZ01D	K22174205	W/ CE	6-	A	F5
C 2218	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203	W/O CE	6-	A	F5
C 2219	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	C3
C 2220	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	B7
C 2221	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	C4
C 2222	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	D2
C 2222	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	D2
C 2223	CHIP CAP.	0.5pF	50V	CK	GRM1884C1HR50CZ01D	K22174201		1-	A	C6
C 2224	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	D2
C 2224	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	D2
C 2225	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		1-	A	E3
C 2227	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E4
C 2228	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	g5
C 2229	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	C4

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 2230	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D2
C 2232	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	D3
C 2233	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	C4
C 2234	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	b7
C 2235	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	C6
C 2236	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	C6
C 2237	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	D3
C 2238	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	D3
C 2239	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	E5
C 2240	CHIP CAP.	10pF	50V	CH	GRM1882C1H100JA01D	K22174211		1-5	A	F3
C 2240	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204	W/ CE	6-	A	F3
C 2240	CHIP CAP.	10pF	50V	CH	GRM1882C1H100JA01D	K22174211	W/O CE	6-	A	F3
C 2241	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	H7
C 2242	CHIP CAP.	0.5pF	50V	CK	GRM1884C1HR50CZ01D	K22174201		1-	A	D4
C 2245	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	E5
C 2246	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	D4
C 2247	CHIP CAP.	4pF	50V	CH	GRM1882C1H4R0CZ01D	K22174205		1-	A	F5
C 2248	CHIP CAP.	6pF	50V	CH	GRM1882C1H6R0DZ01D	K22174207		1-	A	G5
C 2249	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	B6
C 2250	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	D6
C 2252	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	D2
C 2252	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	D2
C 2253	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202	W/ CE	6-	A	E5
C 2255	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D6
C 2256	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	E5
C 2257	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	C4
C 2258	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	D1
C 2258	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	D1
C 2259	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	c7
C 2260	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	G5
C 2261	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-2		
C 2262	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	F3
C 2262	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-5	A	F3
C 2262	CHIP CAP.	120pF	50V	CH	GRM1882C1H121JA01D	K22174237	W/ CE	6-	A	F3
C 2262	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805	W/O CE	6-	A	F3
C 2263	AL.ELECTRO.CAP.	4.7uF	25V		ECEV1ES4R7SR	K48140001		1-	A	G1
C 2263	AL.ELECTRO.CAP.	4.7uF	25V		EEE1ES4R7SR	K48140017		81-	A	G1
C 2264	CHIP CAP.	4pF	50V	CH	GRM1882C1H4R0CZ01D	K22174205		1-	A	G5
C 2265	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	C4
C 2266	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D4
C 2267	AL.ELECTRO.CAP.	47uF	16V		EEE1CA470SP	K48120005		1-	A	F7
C 2268	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E5
C 2269	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	E4
C 2270	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	D2
C 2270	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	D2
C 2271	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	D6
C 2272	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		1-	A	C4
C 2273	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E5
C 2274	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	G4
C 2275	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	B6
C 2276	CHIP CAP.	6pF	50V	CH	GRM1882C1H6R0DZ01D	K22174207		1-	A	D6
C 2277	CHIP CAP.	5pF	50V	CH	GRM1882C1H5R0CZ01D	K22174206		1-	A	G5
C 2278	CHIP CAP.	5pF	50V	CH	GRM1882C1H5R0CZ01D	K22174206		1-	A	G5
C 2279	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	D2
C 2279	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	D2
C 2280	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	C4
C 2281	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	f4
C 2282	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	C4
C 2283	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	D1
C 2285	CHIP CAP.	0.5pF	50V	CK	GRM1884C1HR50CZ01D	K22174201		1-	A	G5
C 2286	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	B6
C 2286	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	B6
C 2287	CHIP CAP.	10pF	50V	CH	GRM1882C1H100RZ01D	K22174248		1-	A	D6
C 2288	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	b4
C 2289	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	D4

RF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 2290	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E6
C 2291	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	G1
C 2292	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	F5
C 2293	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	F7
C 2294	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	d3
C 2297	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	d3
C 2298	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	g5
C 2299	CHIP CAP.	4pF	50V	CH	GRM1882C1H4R0CZ01D	K22174205		1-	A	B6
C 2304	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	d3
C 2305	CHIP CAP.	2.5pF	50V	CK	GRM1884C1H2R5CZ01D	K22174259		1-	A	A6
C 2307	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	G7
C 2308	CHIP CAP.	7pF	50V	CH	GRM1882C1H7R0DZ01D	K22174208		1-	A	E2
C 2309	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E4
C 2310	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E5
C 2311	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	D4
C 2312	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	D4
C 2313	CHIP CAP.	0.5pF	50V	CK	GRM1884C1HR50CZ01D	K22174201		1-	B	d3
C 2314	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	H2
C 2314	CHIP CAP.	0.1uF	25V	F	GRM188F11E104ZA01D	K22145001		3-	A	H2
C 2315	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	d3
C 2316	CHIP CAP.	4pF	50V	CH	GRM1882C1H4R0CZ01D	K22174205		1-	A	A6
C 2317	CHIP CAP.	4pF	50V	CH	GRM1882C1H4R0CZ01D	K22174205		1-	A	G6
C 2318	CHIP CAP.	4pF	50V	CH	GRM1882C1H4R0CZ01D	K22174205		1-	A	E2
C 2320	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	c7
C 2321	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	E4
C 2322	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	d3
C 2323	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	d3
C 2324	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	H2
C 2324	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	H2
C 2325	CHIP CAP.	6pF	50V	CH	GRM1882C1H6R0DZ01D	K22174207		1-	A	A6
C 2327	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	E2
C 2327	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	E2
C 2328	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	G2
C 2328	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	G2
C 2329	CHIP CAP.	10pF	50V	CH	GRM1882C1H100RZ01D	K22174248		1-	A	A5
C 2330	CHIP CAP.	6pF	50V	CH	GRM1882C1H6R0DZ01D	K22174207		1-	A	D6
C 2331	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-5	A	G4
C 2331	CHIP CAP.	120pF	50V	CH	GRM1882C1H121JA01D	K22174237	W/ CE	6-60	A	G4
C 2331	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809	W/O CE	6-	A	G4
C 2332	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	F5
C 2333	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		1-	A	F6
C 2335	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	G6
C 2336	CHIP CAP.	10pF	50V	CH	GRM1882C1H100JA01D	K22174211		1-	A	F6
C 2337	CHIP CAP.	1uF	10V	B	GRM40B105K10PT	K22100802		1-	A	G2
C 2337	CHIP CAP.	1uF	10V	F	GRM188F11A105ZA01D	K22105001		3-	A	G2
C 2338	CHIP CAP.	6pF	50V	CH	GRM1882C1H6R0DZ01D	K22174207		1-	A	A5
C 2339	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	G5
C 2339	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	G5
C 2340	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	G6
C 2341	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	H1
C 2341	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	H1
C 2342	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	G6
C 2343	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	G6
C 2344	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	F6
C 2344	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		46-	A	F6
C 2345	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E5
C 2346	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	F6
C 2347	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	H1
C 2347	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-5	A	H1
C 2347	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805	W/O CE	6-	A	H1
C 2348	CHIP CAP.	4pF	50V	CH	GRM1882C1H4R0CZ01D	K22174205		1-	A	F6
C 2348	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		46-	A	F6
C 2349	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E3
C 2350	CHIP CAP.	0.5pF	50V	CK	GRM1884C1HR50CZ01D	K22174201		1-	A	G6
C 2351	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		1-	A	F6

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 2352	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	E3
C 2352	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	E3
C 2353	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	F6
C 2353	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		46-	A	F6
C 2354	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	c3
C 2354	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	c3
C 2355	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	E3
C 2356	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	E3
C 2356	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	E3
C 2357	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	H5
C 2358	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	F6
C 2359	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	E6
C 2361	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	G2
C 2361	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	G2
C 2362	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	H5
C 2363	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	F6
C 2364	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	F6
C 2365	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	F6
C 2366	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	H5
C 2366	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	H5
C 2367	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E6
C 2368	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	c3
C 2368	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	c3
C 2369	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	F6
C 2370	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	H4
C 2371	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E6
C 2372	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	A	E3
C 2373	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	H4
C 2374	CHIP CAP.	1.5pF	50V	CK	GRM1884C1H1R5CZ01D	K22174258		1-	A	F3
C 2374	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		61-	A	F3
C 2377	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	F6
C 2378	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E6
C 2379	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174821		1-	B	b6
C 2380	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174821		1-	B	b5
C 2382	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	g2
C 2383	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	h3
C 2384	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	B	h3
C 2385	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	B	h3
C 2386	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	C1
C 2386	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	C1
C 2387	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	C1
C 2387	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	C1
C 2389	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	f1
C 2389	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	f1
C 2390	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	g1
C 2391	CHIP CAP.	330pF	50V	B	GRM188B11H331KD01D	K22174803		1-	A	C2
C 2392	CHIP CAP.	47pF	50V	CH	GRM1882C1H470JA01D	K22174227		1-	A	C2
C 2393	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	f1
C 2393	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	f1
C 2394	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	f1
C 2394	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	f1
C 2395	CHIP TA.CAP.	4.7uF	16V		TEESVA1C475M8R	K78120031		1-	A	H6
C 2396	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	G3
C 2397	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D2
C 2398	CHIP TA.CAP.	4.7uF	16V		TEESVA1C475M8R	K78120031		1-	B	b7
C 2399	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	g1
C 2399	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	g1
C 2401	CHIP CAP.	10pF	50V	CH	GRM1882C1H100JA01D	K22174211		1-60	A	F3
C 2401	CHIP CAP.	10pF	50V	CH	GRM1882C1H100JA01D	K22174211	W/O CE	61-	A	F3
C 2402	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E2
C 2403	CHIP CAP.	39pF	50V	CH	GRM1882C1H390JA01D	K22174225		1-2	A	D2
C 2404	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	D2
C 2405	CHIP CAP.	0.5pF	50V	CK	GRM1884C1HR50CZ01D	K22174201		1-14	A	D4
C 2405	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202	W/ CE	15-	A	D4
C 2405	CHIP CAP.	0.5pF	50V	CK	GRM1884C1HR50CZ01D	K22174201	W/O CE	15-	A	D4

RF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 2406	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	B3
C 2412	AL.ELECTRO.CAP.	2200uF	25V		RE3-25V222MI6#	K40149055		1-	A	H3
C 2414	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		1-	B	d3
C 2415	CHIP CAP.	9pF	50V	CH	GRM1882C1H9R0DZ01D	K22174210		1-	A	B3
C 2416	CHIP CAP.	100pF	50V	CH	GRM2162C1H101JA01D	K22170235		1-	B	f5
C 2416	CHIP CAP.	100pF	50V	CH	GRM1882C1H101JA01D	K22174235		3-	B	f5
C 2417	CHIP CAP.	10pF	50V	CH	GRM1882C1H100JA01D	K22174211		1-	A	D3
C 2417	CHIP CAP.	18pF	50V	CH	GRM1882C1H180JA01D	K22174217		61-	A	D3
C 2418	FILM CAP.	0.01uF	50V		NNM103K50	K50170039		1-	A	G6
C 2418	FILM CAP.	0.01uF	16V		ECHU1C103JB5	K57120007		3-	A	G6
C 2418	FILM CAP.	0.01uF	16V		ECHU1C103JX5	K57120030		70-	A	G6
C 2419	CERAMIC CAP.	0.01uF	50V	B	DD112B103K50	K10179052		1-	B	e7
C 2419	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		3-	B	e7
C 2420	AL.ELECTRO.CAP.	2200uF	10V		RE3-10V222MH5#	K40109032		1-	A	B7
C 2421	AL.ELECTRO.CAP.	10uF	16V		RC2-16V100MD1#-T58	K46120004	W/PA-28A	3-	A	H2
C 2421	AL.ELECTRO.CAP.	10uF	16V		RC2-16V100MD1#-T58	K46120004	W/PA-28B	3-	A	H2
C 2421	AL.ELECTRO.CAP.	10uF	16V		RC2-16V100MD1#-T58	K46120004	W/PA-28C	3-	A	H2
C 2421	AL.ELECTRO.CAP.	10uF	16V		RC2-16V100MD1#-T58	K46120004	W/PA-28U	3-	A	H2
C 2422	CHIP CAP.	6pF	50V	UJ	GRM1883U1H6R0DZ01D	K22174306		3-	A	F7
C 2423	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174821		4-	A	D2
C 2424	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174821		4-	A	B2
C 2425	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174821		4-	A	B3
C 2426	CHIP CAP.	120pF	50V	CH	GRM1882C1H121JA01D	K22174237	W/ CE	6-60	A	H3
C 2426	CHIP CAP.	120pF	50V	CH	GRM1882C1H121JA01D	K22174237		61-	A	H3
C 2427	CHIP CAP.	120pF	50V	CH	GRM1882C1H121JA01D	K22174237	W/ CE	6-	A	E3
C 2428	CHIP CAP.	120pF	50V	CH	GRM1882C1H121JA01D	K22174237	W/ CE	6-	B	d3
C 2429	CHIP CAP.	10pF	50V	CH	GRM1882C1H100JA01D	K22174211	W/ CE	61-	A	F3
C 2430	CHIP CAP.	120pF	50V	CH	GRM1882C1H121JA01D	K22174237	W/ CE	61-	A	F5
C 2431	CHIP CAP.	470pF	50V	B	GRM188B11H471KA01D	K22174805		74-		
D 2001	DIODE				DAN235U TL	G2070176		1-	A	B3
D 2002	DIODE				DAN235U TL	G2070176		1-	A	B3
D 2004	DIODE				HVU355 TRF-E	G2070410		1-	A	B3
D 2005	DIODE				HVU355 TRF-E	G2070410		1-	A	B3
D 2006	DIODE				1SS355 TE-17	G2070470		1-	B	h3
D 2007	DIODE				HVM17-TR	G2070148		1-	A	C3
D 2008	VARISTOR				MA28T-A(TX)	G9090061		1-2		
D 2009	DIODE				1SS355 TE-17	G2070470		1-	A	A2
D 2010	DIODE				1SS355 TE-17	G2070470		1-	A	A2
D 2011	DIODE				HVU355 TRF-E	G2070410		1-	A	C3
D 2012	DIODE				HVU355 TRF-E	G2070410		1-	A	C4
D 2013	DIODE				HVM17-TR	G2070148		1-	A	C3
D 2014	DIODE				HVU359 TRF-E	G2070452		1-	B	d5
D 2015	DIODE				HVU359 TRF-E	G2070452		1-	B	e5
D 2016	DIODE				1SS355 TE-17	G2070470		1-	B	g1
D 2017	DIODE				1SS318 TT11	G2070322		1-	A	B3
D 2017	DIODE				1SS356TW11	G2070468		14-	A	B3
D 2018	DIODE				1SS318 TT11	G2070322		1-	A	D3
D 2018	DIODE				1SS356TW11	G2070468		14-	A	D3
D 2019	DIODE				DAN235U TL	G2070176		1-	A	B3
D 2020	DIODE				DAN235U TL	G2070176		1-	A	B2
D 2021	DIODE				DAN235U TL	G2070176		1-	A	B1
D 2022	DIODE				1SS318 TT11	G2070322		1-	A	D3
D 2022	DIODE				1SS356TW11	G2070468		14-	A	D3
D 2023	DIODE				1SS318 TT11	G2070322		1-	A	D3
D 2023	DIODE				1SS356TW11	G2070468		14-	A	D3
D 2024	DIODE				HVU350 TRF-E	G2070380		1-	A	F7
D 2025	DIODE				HVU350 TRF-E	G2070380		1-2		
D 2026	DIODE				HVU359 TRF-E	G2070452		1-	A	B3
D 2027	DIODE				HVU359 TRF-E	G2070452		1-	A	C3
D 2028	DIODE				HVR100-8TRU-E	G2070540		1-	A	C2
D 2030	DIODE				HVM17-TR	G2070148		1-	A	C3
D 2031	DIODE				HVM17-TR	G2070148		1-	A	C2
D 2032	DIODE				1SS355 TE-17	G2070470		1-	B	f5
D 2033	DIODE				SVC341L-TD	G2070720		1-	A	C2
D 2033	DIODE				SVC347S-T-TL-E	G2071210		96-	A	C2

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
D 2034	DIODE				HVU359 TRF-E	G2070452		1-	A	C3
D 2035	DIODE				HVU355 TRF-E	G2070410		1-	A	C6
D 2036	DIODE				HVU359 TRF-E	G2070452		1-	A	C3
D 2037	DIODE				HVM17-TR	G2070148		1-	A	D3
D 2038	DIODE				HVR100-8TRU-E	G2070540		1-	A	C2
D 2039	DIODE				HVM17-TR	G2070148		1-	A	C2
D 2040	DIODE				SVC341L-TD	G2070720		1-	A	D2
D 2040	DIODE				SVC347S-T-TL-E	G2071210		96-	A	D2
D 2041	DIODE				DAN235U TL	G2070176		1-	A	C2
D 2042	DIODE				DAN235U TL	G2070176		1-	A	D2
D 2043	DIODE				1SS318 TT11	G2070322		1-	A	D2
D 2043	DIODE				1SS356TW11	G2070468		14-	A	D2
D 2044	DIODE				1SS318 TT11	G2070322		1-	A	E3
D 2044	DIODE				1SS356TW11	G2070468		14-	A	E3
D 2045	DIODE				1SS318 TT11	G2070322		1-	A	C4
D 2045	DIODE				1SS356TW11	G2070468		14-	A	C4
D 2046	DIODE				1SS318 TT11	G2070322		1-	A	D2
D 2046	DIODE				1SS356TW11	G2070468		14-	A	D2
D 2047	DIODE				1SS318 TT11	G2070322		1-	A	D2
D 2047	DIODE				1SS356TW11	G2070468		14-	A	D2
D 2048	DIODE				1SS318 TT11	G2070322		1-	A	D3
D 2048	DIODE				1SS356TW11	G2070468		14-	A	D3
D 2049	DIODE				1SS318 TT11	G2070322		1-2		
D 2050	DIODE				1SS355 TE-17	G2070470		1-	B	d4
D 2051	DIODE				HVU355 TRF-E	G2070410		1-	A	G5
D 2052	DIODE				1SS355 TE-17	G2070470		1-	B	d4
D 2053	DIODE				HVU359 TRF-E	G2070452		1-	A	G5
D 2054	DIODE				1SS318 TT11	G2070322		1-	A	E1
D 2054	DIODE				1SS356TW11	G2070468		14-	A	E1
D 2056	DIODE				DAN235U TL	G2070176		1-	A	E4
D 2057	DIODE				HVU355 TRF-E	G2070410		1-	A	G6
D 2058	DIODE				1SS318 TT11	G2070322		1-	A	D4
D 2058	DIODE				1SS356TW11	G2070468		14-	A	D4
D 2059	DIODE				HVU355 TRF-E	G2070410		1-	A	G6
D 2060	DIODE				DAN235U TL	G2070176		1-	A	E3
D 2061	DIODE				HVU355 TRF-E	G2070410		1-	A	G6
D 2062	DIODE				1SS355 TE-17	G2070470		1-	A	G2
D 2063	DIODE				1SS318 TT11	G2070322		1-	A	E3
D 2063	DIODE				1SS356TW11	G2070468		14-	A	E3
D 2064	DIODE				DAN235U TL	G2070176		1-	B	c5
D 2065	DIODE				DAN202K T146	G2070182		1-	A	H5
D 2066	DIODE				DAN202K T146	G2070182		1-	A	G4
D 2067	DIODE				DAN235U TL	G2070176		1-	A	E5
D 2070	DIODE				DAN202K T146	G2070182		1-	A	C1
D 2071	DIODE				DAN202K T146	G2070182		1-	B	g3
D 2072	DIODE				DAN235U TL	G2070176		1-	B	f1
D 2073	DIODE				DAN235U TL	G2070176		1-	B	f1
D 2074	DIODE				21DQ04	G2090317		1-	B	a2
D 2074	DIODE				SB40W03T-TL	G2070370		3-	B	a2
D 2075	SURGE ABSORBER				DSP201M-S00B	Q9000375		1-	A	D1
D 2076	DIODE				1SS270-E	G2090408		1-2		
D 2077	DIODE				1SS270-E	G2090408		1-2		
D 2078	DIODE				DAN202K T146	G2070182		3-	B	e7
D 2079	DIODE				GMA01U-BT	G2060023		3-	A	D5
D 2080	DIODE				GMA01U-BT	G2060023		3-	A	C5
FB2001	FERRITE BEADS				SMB304729	L9190094	W/ CE	6-60	A	H1
FB2001	FERRITE BEADS				SMB304729	L9190094		61-	A	H1
FB2002	FERRITE BEADS				SMB304729	L9190094	W/ CE	6-60	A	H1
FB2002	FERRITE BEADS				SMB304729	L9190094		61-	A	H1
J 2001	CONNECTOR				JPJ2545-01-510	P1090633		1-	A	F1
J 2002	CONNECTOR				TMP-J01X-A2	P1090255		1-	A	E7
J 2002	CONNECTOR				TMP-S01X-C1	P1091254		71-	A	E7
J 2003	CONNECTOR				SC25-02WS	P0090621		1-	A	H2
J 2004	CONNECTOR				HEC0470-01-630	P1090567		1-	A	G1
J 2005	CONNECTOR				20FMZ-BT(LF)(SN)	P1090903		1-	A	D7

RF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
J 2006	CONNECTOR				TMP-J01X-A2	P1090255		1-	A	B5
J 2006	CONNECTOR				TMP-S01X-C1	P1091254		71-	A	B5
J 2007	CONNECTOR				TMP-J01X-A2	P1090255		1-	A	F3
J 2007	CONNECTOR				TMP-S01X-C1	P1091254		71-	A	F3
J 2008	WIRE ASSY				RED 80 TMP(B1)/TMP(B1)	T9318155		1-5	A	E5
J 2008	WIRE ASSY				GRA 40 */*	T9318175	W/ CE	6-	A	E5
J 2008	WIRE ASSY				RED 80 TMP(B1)/TMP(B1)	T9318155	W/O CE	6-	A	E5
J 2010	CONNECTOR				TMP-J01X-A2	P1090255		1-	A	A5
J 2010	CONNECTOR				TMP-S01X-C1	P1091254		71-	A	A5
L 2001	M.RFC	0.0047uH			HK1608 4N7S-T	L1690512		1-	A	B4
L 2002	M.RFC	0.0033uH			HK1608 3N3S-T	L1690510		1-	A	B4
L 2003	M.RFC	0.0033uH			HK1608 3N3S-T	L1690510		1-	A	B3
L 2004	M.RFC	0.39uH			ELJ-NCR39JF	L1690654		1-	A	B3
L 2005	M.RFC	1.2uH			LK2125 1R2K-T	L1690320		1-	A	C3
L 2006	M.RFC	0.01uH			HK1608 10NJ-T	L1690516		1-	A	B4
L 2007	M.RFC	0.0033uH			HK1608 3N3S-T	L1690510		1-	A	B4
L 2008	M.RFC	0.01uH			HK1608 10NJ-T	L1690516		1-	A	B4
L 2009	M.RFC	0.0033uH			HK1608 3N3S-T	L1690510		1-	A	B3
L 2010	M.RFC	0.068uH			HK1608 68NJ-T	L1690526		1-	A	C3
L 2011	M.RFC	0.0033uH			HK1608 3N3S-T	L1690510		1-	A	C3
L 2012	M.RFC	0.0033uH			HK1608 3N3S-T	L1690510		1-	A	B4
L 2013	M.RFC	0.0068uH			HK1608 6N8J-T	L1690514		1-	A	C4
L 2014	M.RFC	0.056uH			HK1608 56NJ-T	L1690525		1-	A	C3
L 2015	M.RFC	0.0033uH			HK1608 3N3S-T	L1690510		1-	A	C3
L 2016	M.RFC	0.068uH			HK1608 68NJ-T	L1690526		1-	A	C3
L 2018	M.RFC	0.01uH			HK1608 10NJ-T	L1690516		1-	A	C4
L 2020	M.RFC	0.33uH			ELJ-NCR33JF	L1690653		1-	A	B4
L 2022	M.RFC	1.2uH			LK2125 1R2K-T	L1690320		1-	A	D3
L 2023	M.RFC	0.12uH			ELJ-NCR12JF	L1690648		1-	A	C3
L 2024	M.RFC	0.12uH			ELJ-NCR12JF	L1690648		1-	A	D4
L 2025	M.RFC	0.01uH			HK1608 10NJ-T	L1690516		1-	A	C3
L 2026	M.RFC	0.01uH			HK1608 10NJ-T	L1690516		1-	A	D3
L 2027	M.RFC	0.0068uH			HK1608 6N8J-T	L1690514		1-2		
L 2028	M.RFC	1.2uH			LK2125 1R2K-T	L1690320		1-	A	B3
L 2030	M.RFC	5.6uH			LK2125 5R6K-T	L1690328		1-	A	C2
L 2032	M.RFC	0.01uH			HK1608 10NJ-T	L1690516		1-2		
L 2033	M.RFC	6.8uH			LK2125 6R8K-T	L1690329		1-	A	C2
L 2034	M.RFC	0.0082uH			HK1608 8N2J-T	L1690515		1-	A	C3
L 2035	M.RFC	0.0068uH			HK1608 6N8J-T	L1690514		1-	A	D3
L 2036	M.RFC	0.47uH			ELJ-NCR47JF	L1690655		1-	A	C3
L 2037	M.RFC	3.3uH			LK2125 3R3K-T	L1690325		1-	A	C2
L 2038	M.RFC	0.0082uH			HK1608 8N2J-T	L1690515		1-	A	C3
L 2039	M.RFC	0.33uH			ELJ-NCR33JF	L1690653		1-	B	h3
L 2040	M.RFC	0.0068uH			HK1608 6N8J-T	L1690514		1-	A	D3
L 2041	M.RFC	0.0047uH			HK1608 4N7S-T	L1690512		1-	A	B4
L 2042	M.RFC	0.01uH			HK1608 10NJ-T	L1690516		1-	A	D3
L 2043	M.RFC	1.5uH			LK2125 1R5K-T	L1690321		1-	A	C2
L 2044	M.RFC	0.18uH			ELJ-NCR18JF	L1690650		1-	A	C3
L 2045	M.RFC	1.2uH			LK2125 1R2K-T	L1690320		1-	A	C2
L 2046	M.RFC	0.39uH			ELJ-NCR39JF	L1690654		1-	A	C3
L 2047	M.RFC	0.0082uH			HK1608 8N2J-T	L1690515		1-	A	C3
L 2048	M.RFC	0.0039uH			HK1608 3N9S-T	L1690511		1-	A	B4
L 2049	M.RFC	2.7uH			LK2125 2R7K-T	L1690324		1-	A	C2
L 2050	M.RFC	0.47uH			LK2125 R47K-T	L1690315		1-	A	C3
L 2051	M.RFC	0.0068uH			HK1608 6N8J-T	L1690514		1-	A	C4
L 2052	M.RFC	10uH			LK2125 100K-T	L1690331		1-	A	C2
L 2053	COIL	0.017uH			AS030616-17NK	L0022678		1-	A	C6
L 2054	M.RFC	1uH			LK2125 1R0K-T	L1690319		1-	A	C3
L 2055	M.RFC	0.0039uH			HK1608 3N9S-T	L1690511		1-	A	B4
L 2056	M.RFC	0.27uH			ELJ-NCR27JF	L1690652		1-	B	f5
L 2057	M.RFC	4.7uH			LK2125 4R7K-T	L1690327		1-	A	C2
L 2058	M.RFC	8.2uH			LK2125 8R2K-T	L1690330		1-	A	D2
L 2059	M.RFC	0.0039uH			HK1608 3N9S-T	L1690511		1-	A	B4
L 2060	M.RFC	0.0068uH			HK1608 6N8J-T	L1690514		1-	A	E5
L 2061	M.RFC	0.0039uH			HK1608 3N9S-T	L1690511		1-	A	B4

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
L 2063	M.RFC	0.012uH			HK1608 12NJ-T	L1690517		1-	A	E5
L 2064	M.RFC	0.27uH			ELJ-NCR27JF	L1690652		1-	B	g5
L 2065	M.RFC	1.2uH			LK2125 1R2K-T	L1690320		1-	A	D2
L 2066	M.RFC	1.2uH			LK2125 1R2K-T	L1690320		1-	A	D3
L 2067	M.RFC	0.12uH			ELJ-NCR12JF	L1690648		1-	A	E3
L 2068	M.RFC	0.12uH			ELJ-NCR12JF	L1690648		1-	A	C4
L 2069	M.RFC	0.0033uH			HK1608 3N3S-T	L1690510		1-	A	E5
L 2070	M.RFC	0.33uH			ELJ-NCR33JF	L1690653		1-	A	C6
L 2071	M.RFC	0.022uH			HK1608 22NJ-T	L1690520		1-	A	D3
L 2071	M.RFC	0.056uH			HK1608 56NJ-T	L1690525		3-	A	D3
L 2071	M.RFC	0.033uH			HK1608 33NJ-T	L1690522		61-	A	D3
L 2075	M.RFC	0.0056uH			HK1608 5N6S-T	L1690513		1-	A	E5
L 2076	COIL				E2 0.28-1.0-3.5T-R-S	L0022597		1-	A	G5
L 2077	M.RFC	0.33uH			ELJ-NCR33JF	L1690653		1-	A	C4
L 2078	M.RFC	0.018uH			HK1608 18NJ-T	L1690519		1-	A	B6
L 2079	M.RFC	0.018uH			HK1608 18NJ-T	L1690519		1-	A	D6
L 2080	M.RFC	0.0056uH			HK1608 5N6S-T	L1690513		1-	A	C4
L 2081	M.RFC	0.0056uH			HK1608 5N6S-T	L1690513		1-	A	C4
L 2082	M.RFC	0.015uH			HK1608 15NJ-T	L1690518		1-	A	D6
L 2083	M.RFC	330uH			FLC32T-331J	L1690233		1-	A	D1
L 2084	M.RFC	0.018uH			HK1608 18NJ-T	L1690519		1-	A	D1
L 2086	M.RFC	0.018uH			HK1608 18NJ-T	L1690519		1-	A	D2
L 2087	M.RFC	0.12uH			ELJ-NCR12JF	L1690648		1-	A	D4
L 2088	M.RFC	0.01uH			HK1608 10NJ-T	L1690516		1-	A	B6
L 2089	M.RFC	0.0068uH			HK1608 6N8J-T	L1690514		1-	B	d3
L 2090	M.RFC	0.018uH			HK1608 18NJ-T	L1690519		1-	A	E2
L 2091	M.RFC	0.01uH			HK1608 10NJ-T	L1690516		1-	A	A6
L 2092	M.RFC	0.047uH			HK1608 47NJ-T	L1690524		1-	A	F5
L 2094	M.RFC	0.33uH			ELJ-NCR33JF	L1690653		1-	A	G5
L 2096	M.RFC	0.015uH			HK1608 15NJ-T	L1690518		1-	A	A6
L 2097	M.RFC	0.015uH			HK1608 15NJ-T	L1690518		1-	A	D6
L 2098	COIL				E2 0.26-0.9-2.5T-R-S	L0022682		1-	A	G6
L 2099	M.RFC	0.015uH			HK1608 15NJ-T	L1690518		1-	A	A5
L 2100	M.RFC	0.33uH			ELJ-NCR33JF	L1690653		1-	A	E4
L 2101	M.RFC	0.0033uH			HK1608 3N3S-T	L1690510		1-	A	F6
L 2102	M.RFC	0.0056uH			HK1608 5N6S-T	L1690513		1-	A	F6
L 2103	M.RFC	0.12uH			ELJ-NCR12JF	L1690648		1-	A	E3
L 2105	M.RFC	0.047uH			HK1608 47NJ-T	L1690524		1-	A	F6
L 2106	M.RFC	0.33uH			ELJ-NCR33JF	L1690653		1-	A	G6
L 2107	M.RFC	0.33uH			ELJ-NCR33JF	L1690653		1-	A	E6
L 2108	M.RFC	0.33uH			ELJ-NCR33JF	L1690653		1-	A	F5
L 2109	M.RFC	0.33uH			ELJ-NCR33JF	L1690653		1-	A	E6
L 2110	M.RFC	0.018uH			HK1608 18NJ-T	L1690519		1-	A	E3
L 2110	M.RFC	0.022uH			HK1608 22NJ-T	L1690520		97-	A	E3
L 2112	M.RFC	0.047uH			HK1608 47NJ-T	L1690524		1-	A	E6
L 2113	M.RFC	0.0056uH			HK1608 5N6S-T	L1690513		1-	B	h3
L 2114	M.RFC	0.01uH			HK1608 10NJ-T	L1690516		1-	A	E3
L 2114	M.RFC	0.0068uH			HK1608 6N8J-T	L1690514		97-	A	E3
L 2115	M.RFC	0.022uH			HK1608 22NJ-T	L1690520		1-	A	E3
L 2115	M.RFC	0.018uH			HK1608 18NJ-T	L1690519		97-	A	E3
L 2116	M.RFC	0.015uH			HK1608 15NJ-T	L1690518		1-	A	D4
L 2116	M.RFC	0.018uH			HK1608 18NJ-T	L1690519		97-	A	D4
L 2117	M.RFC	0.022uH			HK1608 22NJ-T	L1690520		1-	A	D4
L 2118	M.RFC	0.0047uH			HK1608 4N7S-T	L1690512		1-	A	F3
L 2120	M.RFC	0.22uH			HK1608 R22J-T	L1690940		1-	A	C6
L 2121	M.RFC	0.39uH			LK1608 R39K-T	L1690413		1-	A	B3
L 2122	M.RFC	0.39uH			LK1608 R39K-T	L1690413		1-	A	D3
L 2123	M.RFC	0.01uH			HK1608 10NJ-T	L1690516		1-	A	F3
L 2124	M.RFC	0.39uH			LK1608 R39K-T	L1690413		1-	A	G6
L 2125	M.RFC	0.39uH			LK1608 R39K-T	L1690413		1-	A	G5
L 2126	M.RFC	0.39uH			LK1608 R39K-T	L1690413		1-	A	G5
L 2127	M.RFC	0.39uH			LK1608 R39K-T	L1690413		1-	A	G6
L 2128	M.RFC	0.056uH			HK2125 56NJ-T	L1690386		3-	A	D3
L 2129	M.RFC	100uH			LAL02NA101K	L1190307	W/ CE	6-60	A	F3
L 2129	M.RFC	100uH			LEM2520T101J	L1690635		61-	A	F3

RF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
L 2130	M.RFC	2.2uH			LK1608 2R2K-T	L1690634		61-	A	D2
L 2131	M.RFC	0.22uH			HK1608 R22J-T	L1690940		61-	A	D3
L 2132	M.RFC	0.027uH			HK1608 27NJ-T	L1690521		61-	A	D3
L 2133	M.RFC	0.01uH			HK1608 10NJ-T	L1690516		61-	A	C3
P 1001	TERMINAL				B4 AG M3	Q6000114		4-		
Q 2001	IC				M5223AFP 600C	G1092955		1-	A	G1
Q 2002	IC				M5223AFP 600C	G1092955		1-	A	B7
Q 2003	IC				M5223AFP 600C	G1092955		1-	B	b7
Q 2004	TRANSISTOR				DTC114EK T146	G3070002		1-	B	e7
Q 2005	TRANSISTOR				DTC114EK T146	G3070002		1-	B	h3
Q 2006	TRANSISTOR				2SC4116GR(TE85R.F)	G3341167G		1-	A	D7
Q 2007	TRANSISTOR				2SC4116GR(TE85R.F)	G3341167G		1-	A	E7
Q 2008	TRANSISTOR				IMD3 T108	G3070053		1-	B	c1
Q 2009	TRANSISTOR				DTC114EK T146	G3070002		1-	A	A2
Q 2010	TRANSISTOR				DTC114EK T146	G3070002		1-	A	C7
Q 2011	IC				NJM78L09UA-TE2	G1091305		1-	A	B6
Q 2012	IC				NJM78L05UA-TE1	G1091325		1-	A	C7
Q 2013	IC				UPC2711T-E3	G1092861		1-	A	B4
Q 2014	TRANSISTOR				DTC114EK T146	G3070002		1-	A	A1
Q 2015	TRANSISTOR				DTC114EK T146	G3070002		1-	B	g1
Q 2016	FET				2SK210-GR(TE85R.F)	G3802107G		1-	A	F7
Q 2017	IC				L78M05T-TL	G1091731		1-	A	H7
Q 2018	IC				MB15A02PFV1-G-BND-EFE1	G1092541		1-	A	D7
Q 2019	FET				3SK228XR-TR	G4802287		1-	A	D3
Q 2019	FET				SGM2016AM-T7	G4070012		61-	A	D3
Q 2020	FET				3SK228XR-TR	G4802287		1-	A	C3
Q 2020	FET				SGM2016AM-T7	G4070012		61-	A	C3
Q 2021	FET				3SK228XR-TR	G4802287		1-	A	C4
Q 2021	FET				SGM2016AM-T7	G4070012		61-	A	C4
Q 2022	TRANSISTOR				2SC4116GR(TE85R.F)	G3341167G		1-	A	F7
Q 2023	TRANSISTOR				2SC4116GR(TE85R.F)	G3341167G		1-	B	e5
Q 2024	IC				NJM78L09UA-TE2	G1091305		1-	A	H7
Q 2025	IC				UPC2711T-E3	G1092861		1-	B	h3
Q 2027	TRANSISTOR				2SC4116GR(TE85R.F)	G3341167G		1-	B	f5
Q 2028	TRANSISTOR				2SC4116GR(TE85R.F)	G3341167G		1-	A	G7
Q 2029	TRANSISTOR				2SA1586Y(TE85R.F)	G3115867Y		1-	A	F7
Q 2030	TRANSISTOR				2SC3356-T2B R24	G3333567D		1-	A	C6
Q 2031	FET				3SK228XR-TR	G4802287		1-	A	D2
Q 2031	FET				SGM2016AM-T7	G4070012		61-	A	D2
Q 2032	FET				3SK228XR-TR	G4802287		1-	A	D3
Q 2032	FET				SGM2016AM-T7	G4070012		61-	A	D3
Q 2033	FET				3SK228XR-TR	G4802287		1-	A	E3
Q 2033	FET				SGM2016AM-T7	G4070012		61-	A	E3
Q 2034	TRANSISTOR				2SC3585-T2B R42	G3335857		1-	A	C4
Q 2035	TRANSISTOR				2SC3356-T2B R24	G3333567D		1-	A	C6
Q 2036	IC				UPC2711T-E3	G1092861		1-	A	C4
Q 2037	TRANSISTOR				2SA1586Y(TE85R.F)	G3115867Y		1-	B	e7
Q 2038	IC				NJU7201U30-TE1	G1093167		1-	A	H7
Q 2039	TRANSISTOR				FMC3 T148	G3070046		1-	A	F3
Q 2040	TRANSISTOR				2SC3356-T2B R24	G3333567D		1-	A	B6
Q 2041	TRANSISTOR				2SC3356-T2B R24	G3333567D		1-	A	D6
Q 2042	TRANSISTOR				FMC3 T148	G3070046		1-	A	F2
Q 2043	TRANSISTOR				FMC3 T148	G3070046		1-	A	F3
Q 2044	TRANSISTOR				FMC3 T148	G3070046		1-	B	b3
Q 2045	FET				3SK228XR-TR	G4802287		1-	A	D1
Q 2045	FET				SGM2016AM-T7	G4070012		61-	A	D1
Q 2047	TRANSISTOR				2SC3356-T2B R24	G3333567D		1-	A	G5
Q 2048	TRANSISTOR				FMC3 T148	G3070046		1-	A	F2
Q 2049	TRANSISTOR				FMC3 T148	G3070046		1-	A	F3
Q 2050	TRANSISTOR				FMC3 T148	G3070046		1-	B	f4
Q 2051	TRANSISTOR				FMC3 T148	G3070046		1-	B	b3
Q 2052	TRANSISTOR				2SC3356-T2B R24	G3333567D		1-	A	G5
Q 2053	TRANSISTOR				FMC3 T148	G3070046		1-	A	F2
Q 2054	TRANSISTOR				FMC3 T148	G3070046		1-	B	b3
Q 2055	IC				MB15E05PFV1-G-BND-EF	G1093012		1-	A	F7

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
Q 2056	TRANSISTOR				2SC3585-T2B R42	G3335857		1-	A	D4
Q 2058	TRANSISTOR				FMC3 T148	G3070046		1-	A	G2
Q 2059	IC				BU4094BCFV-E1	G1092128		1-	A	F2
Q 2059	IC				BU4094BCFV-E2	G1093527		24-	A	F2
Q 2060	TRANSISTOR				FMC3 T148	G3070046		1-	A	G2
Q 2061	TRANSISTOR				2SC3120(TE85R.F)	G3331207		1-	A	F3
Q 2062	IC				NJM78L09UA-TE2	G1091305		1-	A	H2
Q 2063	IC				UPC2711T-E3	G1092861		1-	A	E4
Q 2064	FET				3SK228XR-TR	G4802287		1-	A	E3
Q 2064	FET				SGM2016AM-T7	G4070012		61-	A	E3
Q 2065	TRANSISTOR				FMC3 T148	G3070046		1-	A	G2
Q 2066	TRANSISTOR				FMC3 T148	G3070046		1-	B	d3
Q 2067	TRANSISTOR				2SC3356-T2B R24	G3333567D		1-	A	G6
Q 2068	IC				UPC2710T-E3	G1091844		1-	A	E6
Q 2069	TRANSISTOR				FMC3 T148	G3070046		1-	B	c2
Q 2070	TRANSISTOR				2SC3356-T2B R24	G3333567D		1-	A	G6
Q 2071	TRANSISTOR				DTC114EK T146	G3070002		1-	A	H5
Q 2072	IC				BU4094BCFV-E1	G1092128		1-	A	G2
Q 2072	IC				BU4094BCFV-E2	G1093527		24-	A	G2
Q 2073	TRANSISTOR				FMS1 T148	G3070008		1-	A	G4
Q 2074	TRANSISTOR				FMS1 T148	G3070008		1-	A	H5
Q 2075	IC				UPC2711T-E3	G1092861		1-	A	F6
Q 2076	TRANSISTOR				FMC3 T148	G3070046		1-	B	c2
Q 2077	TRANSISTOR				DTC114EK T146	G3070002		1-	A	H4
Q 2078	TRANSISTOR				DTC114EK T146	G3070002		1-	B	b7
Q 2079	TRANSISTOR				FMS1 T148	G3070008		1-	A	C1
Q 2080	TRANSISTOR				2SC3420-GR(Q)	G3334200G		1-2		
Q 2080	TRANSISTOR				2SC3420-GR(Q)	G3334200G	W/ PA-4A	3-60		
Q 2081	IC				UPC2412AHF	G1093310		1	A	H1
Q 2081	IC				BA12T	G1093313	W/PA-28A	3-	A	H1
Q 2081	IC				BA12T	G1093313	W/PA-28B	3-	A	H1
Q 2081	IC				BA12T	G1093313	W/PA-28C	3-	A	H1
Q 2081	IC				BA12T	G1093313	W/PA-28U	3-	A	H1
R 2001	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	B4
R 2002	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	g4
R 2003	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	g3
R 2004	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	B3
R 2005	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	B3
R 2006	CHIP RES.	390	1/16W	5%	RMC1/16 391JATP	J24185391		1-	B	h1
R 2007	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	g1
R 2008	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	g4
R 2009	CHIP RES.	2.2k	1/16W	5%	RMC1/16 222JATP	J24185222		1-	B	d7
R 2010	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	e7
R 2011	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	A	D7
R 2012	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	A	E7
R 2013	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	B3
R 2014	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	B	g4
R 2015	CHIP RES.	56	1/16W	5%	RMC1/16 560JATP	J24185560		1-	B	g2
R 2016	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	f3
R 2017	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	B	d6
R 2017	CHIP RES.	18k	1/16W	5%	RMC1/16 183JATP	J24185183		5-	B	d6
R 2017	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		78-	B	d6
R 2017	CHIP RES.	12k	1/16W	5%	RMC1/16 123JATP	J24185123		92-	B	d6
R 2018	CHIP RES.	12k	1/16W	5%	RMC1/16 123JATP	J24185123		1-	A	E7
R 2019	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	A	D7
R 2020	CHIP RES.	12k	1/16W	5%	RMC1/16 123JATP	J24185123		1-	A	E7
R 2021	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	A	E7
R 2022	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	A	E4
R 2023	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	E7
R 2024	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	e6
R 2025	CHIP RES.	4.7	1W	5%	RMC1 4R7JTE	J24305479		1-	A	B7
R 2026	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	E7
R 2027	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	e7
R 2028	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	E7
R 2029	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	E7

RF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 2030	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	C3
R 2031	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	B	f3
R 2032	CHIP RES.	2.2k	1/16W	5%	RMC1/16 222JATP	J24185222		1-	B	e5
R 2033	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1-	A	C7
R 2034	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	F7
R 2035	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-60		
R 2036	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	g3
R 2037	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	A	C4
R 2038	CHIP RES.	10	1W	5%	RMC1 100JTE	J24305100		1-	A	H8
R 2039	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-60		
R 2040	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	A	F7
R 2041	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-2	A	F7
R 2042	CHIP RES.	22	1/16W	5%	RMC1/16 220JATP	J24185220		1-	B	g3
R 2043	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	C7
R 2045	CHIP RES.	2.2k	1/16W	5%	RMC1/16 222JATP	J24185222		1-60	A	C3
R 2046	CHIP RES.	1.5k	1/16W	5%	RMC1/16 152JATP	J24185152		1-	A	C4
R 2047	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	A	F7
R 2049	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	B	e3
R 2050	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	D3
R 2051	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	C4
R 2052	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	C4
R 2053	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	D4
R 2054	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	D4
R 2055	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	g2
R 2056	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1-	B	e5
R 2057	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	F7
R 2058	CHIP RES.	22	1/16W	5%	RMC1/16 220JATP	J24185220		1-	A	D3
R 2059	CHIP RES.	22	1/16W	5%	RMC1/16 220JATP	J24185220		1-	A	C4
R 2060	CHIP RES.	22	1/16W	5%	RMC1/16 220JATP	J24185220		1-	A	C4
R 2061	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	e5
R 2062	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	B	e5
R 2063	CHIP RES.	22	1/16W	5%	RMC1/16 220JATP	J24185220		1-	A	D3
R 2064	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	C4
R 2065	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	e7
R 2066	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	e7
R 2067	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	F7
R 2068	CHIP RES.	33k	1/16W	5%	RMC1/16 333JATP	J24185333		1-	A	F7
R 2069	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	f7
R 2070	CHIP RES.	22	1/16W	5%	RMC1/16 220JATP	J24185220		1-	A	C4
R 2071	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	B2
R 2072	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	e5
R 2073	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	B3
R 2074	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	B3
R 2075	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	F7
R 2076	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	C2
R 2077	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	B2
R 2078	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	B2
R 2079	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	D3
R 2080	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1-	A	C7
R 2081	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	F7
R 2082	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-2		
R 2083	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	C3
R 2084	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	C2
R 2085	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	B2
R 2086	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	B2
R 2087	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	B3
R 2088	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	B	f3
R 2089	CHIP RES.	18k	1/16W	5%	RMC1/16 183JATP	J24185183		1-	A	D7
R 2090	CHIP RES.	220k	1/16W	5%	RMC1/16 224JATP	J24185224		1-2		
R 2091	CHIP RES.	220k	1/16W	5%	RMC1/16 224JATP	J24185224		1-2		
R 2092	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	C3
R 2093	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	C2
R 2094	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	C2
R 2095	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	f5
R 2096	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	f5

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 2097	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	B2
R 2098	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	B2
R 2099	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	f5
R 2100	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	F7
R 2101	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	F7
R 2103	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	f5
R 2104	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	B	e3
R 2105	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	f5
R 2106	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	C2
R 2108	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	C3
R 2109	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1	A	C7
R 2109	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		2-	A	C7
R 2110	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	f5
R 2111	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	B3
R 2113	CHIP RES.	6.8k	1/16W	5%	RMC1/16 682JATP	J24185682		1-	A	G7
R 2114	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	B3
R 2115	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	A	D3
R 2116	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1	A	C7
R 2116	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		2-	A	C7
R 2117	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	D7
R 2119	CHIP RES.	1.5k	1/16W	5%	RMC1/16 152JATP	J24185152		1-	A	E4
R 2120	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1-	B	e5
R 2121	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	C2
R 2122	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-60		
R 2123	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	C2
R 2124	CHIP RES.	8.2k	1/16W	5%	RMC1/16 822JATP	J24185822		1-	B	b7
R 2125	CHIP RES.	82k	1/16W	5%	RMC1/16 823JATP	J24185823		1-	A	G7
R 2126	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	D2
R 2127	CHIP RES.	1.5k	1/16W	5%	RMC1/16 152JATP	J24185152		1-	A	D2
R 2127	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		3-60	A	D2
R 2128	CHIP RES.	2.2k	1/16W	5%	RMC1/16 222JATP	J24185222		1-60	A	D3
R 2129	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	E4
R 2130	CHIP RES.	8.2k	1/16W	5%	RMC1/16 822JATP	J24185822		1-	B	b7
R 2131	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	C2
R 2132	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	C3
R 2133	CHIP RES.	27k	1/16W	5%	RMC1/16 273JATP	J24185273		1-	A	C6
R 2134	CHIP RES.	27k	1/16W	5%	RMC1/16 273JATP	J24185273		1-	A	C6
R 2135	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	D2
R 2136	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	B	e3
R 2137	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	D3
R 2139	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1-	A	C4
R 2140	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	A	C4
R 2141	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	C2
R 2142	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	C3
R 2143	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	D2
R 2144	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	A	C4
R 2145	CHIP RES.	8.2k	1/16W	5%	RMC1/16 822JATP	J24185822		1-	B	a7
R 2146	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	C2
R 2147	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	C6
R 2149	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	C2
R 2150	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	C4
R 2151	CHIP RES.	2.2k	1/16W	5%	RMC1/16 222JATP	J24185222		1-	A	C2
R 2152	CHIP RES.	68	1/16W	5%	RMC1/16 680JATP	J24185680		1-	A	D2
R 2152	CHIP RES.	22	1/16W	5%	RMC1/16 220JATP	J24185220		61-	A	D2
R 2153	CHIP RES.	22	1/16W	5%	RMC1/16 220JATP	J24185220		1-	A	D3
R 2154	CHIP RES.	560	1/16W	5%	RMC1/16 561JATP	J24185561		1-	A	E4
R 2155	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	C4
R 2156	CHIP RES.	8.2k	1/16W	5%	RMC1/16 822JATP	J24185822		1-	B	b7
R 2157	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	g5
R 2158	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	A	C6
R 2159	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	C2
R 2160	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	D2
R 2161	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	C6
R 2162	CHIP RES.	22	1/16W	5%	RMC1/16 220JATP	J24185220		1-	A	D2
R 2163	CHIP RES.	22	1/16W	5%	RMC1/16 220JATP	J24185220		1-	A	D3

RF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 2164	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	a7
R 2165	CHIP RES.	22	1/16W	5%	RMC1/16 220JATP	J24185220		1-	A	D4
R 2166	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	C3
R 2167	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	A	F7
R 2168	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	D2
R 2169	CHIP RES.	22	1/16W	5%	RMC1/16 220JATP	J24185220		1-	A	E3
R 2170	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	A	C6
R 2171	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	A	C6
R 2172	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	D2
R 2174	CHIP RES.	270	1/16W	5%	RMC1/16 271JATP	J24185271		1-	A	C6
R 2175	CHIP RES.	18	1/16W	5%	RMC1/16 180JATP	J24185180		1-	A	C6
R 2176	CHIP RES.	6.8k	1/16W	5%	RMC1/16 682JATP	J24185682		1-	B	e7
R 2177	CHIP RES.	270	1/16W	5%	RMC1/16 271JATP	J24185271		1-	A	C6
R 2178	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	A	B6
R 2179	CHIP RES.	47	1/16W	5%	RMC1/16 470JATP	J24185470		1-	A	D6
R 2181	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	D2
R 2182	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	A	B6
R 2183	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	A	D6
R 2184	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	E4
R 2185	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-2		
R 2186	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	D2
R 2187	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	D4
R 2188	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	A	E4
R 2189	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	D1
R 2190	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-2		
R 2191	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	e7
R 2192	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	A	E4
R 2193	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	A	B6
R 2194	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	A	D6
R 2195	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	C4
R 2196	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-2		
R 2197	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	e7
R 2198	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	G5
R 2199	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	G5
R 2200	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	A	G1
R 2201	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	e7
R 2202	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	D6
R 2203	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	A	D2
R 2203	CHIP RES.	22	1/16W	5%	RMC1/16 220JATP	J24185220		61-	A	D2
R 2204	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	G7
R 2205	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	B6
R 2206	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-2		
R 2207	CHIP RES.	22	1/16W	5%	RMC1/16 220JATP	J24185220		1-	A	D2
R 2209	CHIP RES.	120k	1/16W	5%	RMC1/16 124JATP	J24185124		1-	A	G1
R 2210	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	A	G5
R 2211	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	G5
R 2213	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	A	D4
R 2215	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	G5
R 2216	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	A	B6
R 2217	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	E5
R 2218	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	D3
R 2219	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	G1
R 2220	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1-	A	D4
R 2221	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	A	G5
R 2222	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	E5
R 2224	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	A	F3
R 2225	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	D4
R 2226	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	A	E4
R 2230	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	B	d3
R 2231	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	B	d3
R 2233	CHIP RES.	22	1/16W	5%	RMC1/16 220JATP	J24185220		1-	A	D4
R 2234	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	B	d3
R 2235	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1-	B	b7
R 2236	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	E2
R 2237	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	E5

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 2238	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	B	d3
R 2239	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	A	D6
R 2240	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	G6
R 2241	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1-	B	b7
R 2242	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	F6
R 2243	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	G2
R 2245	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	E3
R 2246	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	E6
R 2247	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	G6
R 2248	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1-	B	b7
R 2249	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	A	E3
R 2250	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	E3
R 2251	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	G6
R 2252	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	b7
R 2253	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	b7
R 2254	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	b7
R 2256	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	A	G6
R 2257	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	G6
R 2259	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	A	G6
R 2260	CHIP RES.	22	1/16W	5%	RMC1/16 220JATP	J24185220		1-	A	E3
R 2261	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	E5
R 2262	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	A	H5
R 2263	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	G4
R 2264	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	H5
R 2265	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	H5
R 2266	CHIP RES.	3.9k	1/16W	5%	RMC1/16 392JATP	J24185392		1-	A	H5
R 2267	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	H5
R 2268	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	H5
R 2269	CHIP RES.	1.5k	1/16W	5%	RMC1/16 152JATP	J24185152		1-	A	F5
R 2270	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	E3
R 2271	CHIP RES.	270	1/16W	5%	RMC1/16 271JATP	J24185271		1-	A	F5
R 2273	CHIP RES.	18	1/16W	5%	RMC1/16 180JATP	J24185180		1-	A	F6
R 2274	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	A	H4
R 2275	CHIP RES.	270	1/16W	5%	RMC1/16 271JATP	J24185271		1-	A	F5
R 2276	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	H4
R 2277	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	H4
R 2278	CHIP RES.	47	1/16W	5%	RMC1/16 470JATP	J24185470		1-	A	F6
R 2279	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	F6
R 2280	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	A	F6
R 2281	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	A	F6
R 2282	CHIP RES.	3.9k	1/16W	5%	RMC1/16 392JATP	J24185392		1-	A	H4
R 2284	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	b4
R 2286	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-2		
R 2287	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	A	E5
R 2289	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	b7
R 2290	CHIP RES.	2.2k	1/16W	5%	RMC1/16 222JATP	J24185222		1-	B	b7
R 2292	CHIP RES.	390	1/16W	5%	RMC1/16 391JATP	J24185391		1-	B	f1
R 2293	CHIP RES.	56	1/16W	5%	RMC1/16 560JATP	J24185560		1-	B	f1
R 2294	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	C1
R 2295	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	C1
R 2296	CHIP RES.	3.9k	1/16W	5%	RMC1/16 392JATP	J24185392		1-	A	C1
R 2297	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	B1
R 2298	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	B1
R 2299	CHIP RES.	1.5k	1/16W	5%	RMC1/16 152JATP	J24185152		1-	A	C1
R 2300	CHIP RES.	1.5k	1/16W	5%	RMC1/16 152JATP	J24185152		1-	A	C1
R 2301	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	g1
R 2302	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-2		
R 2303	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	A	E2
R 2304	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	A	B1
R 2305	CHIP RES.	1.5k	1/16W	5%	RMC1/16 152JATP	J24185152		1-	A	C1
R 2306	CHIP RES.	1.5k	1/16W	5%	RMC1/16 152JATP	J24185152		1-	B	f1
R 2307	CHIP RES.	2.2k	1/16W	5%	RMC1/16 222JATP	J24185222		1-	A	H6
R 2309	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	B	b7
R 2310	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	A	F3
R 2311	CHIP RES.	56	1/16W	5%	RMC1/16 560JATP	J24185560		1-60	A	E4


RF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 2313	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	A	C4
R 2314	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	A	G5
R 2315	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	A	E5
R 2316	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	A	G6
R 2321	CHIP RES.	56	1/16W	5%	RMC1/16 560JATP	J24185560		1-	B	d3
R 2322	CHIP RES.	56	1/16W	5%	RMC1/16 560JATP	J24185560		1-	B	d3
R 2323	CHIP RES.	56	1/16W	5%	RMC1/16 560JATP	J24185560		1-	B	d3
R 2324	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	A	D4
R 2325	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	e1
R 2326	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	e1
R 2327	CARBON FILM RES.	100k	1/6W	5%	RD16TPJ104 100K	J07225104		1-	B	e7
R 2327	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		3-	B	e7
R 2328	CARBON FILM RES.	47	1/6W	5%	RD16TPJ470 47	J07225470		1-2		
R 2328	CHIP RES.	47	1/16W	5%	RMC1/16 470JATP	J24185470	W/ PA-4A	3-60		
R 2329	CARBON FILM RES.	56	1/6W	5%	RD16TPJ560 56	J07225560		1-	A	F3
R 2329	CHIP RES.	56	1/16W	5%	RMC1/16 560JATP	J24185560		3-	A	F3
R 2330	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		3-60		
R 2331	CARBON FILM RES.	22k	1/6W	5%	RD16TPJ223 22K	J07225223		3-	A	F3
R 2331	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		61-	A	F3
R 2332	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		3-	B	d4
R 2332	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		61-	B	d4
RL2001	RELAY		DC12V		G6Y-1 DC12V	M1190159		1-	A	A4
RL2002	RELAY		DC12V		G6Y-1 DC12V	M1190159		1-	A	A2
RL2003	RELAY		DC12V		G6Y-1 DC12V	M1190159		1-	A	A3
RL2004	RELAY		DC12V		G6Y-1 DC12V	M1190159		1-	A	B2
S 2001	SLIDE SWITCH				SSS212299	N6090051		1-	A	C1
T 2001	COIL 07WIDE				9-1 2D3 TR6X3	L0020789A		1-	A	D1
T 2002	COIL 07RF				4.2U R12-T305X	L0022594		1-	A	D6
T 2003	COIL 07RF	35.1MHz			35.1M R-M407A	L0021517		1-	A	D5
T 2004	COIL 07RF	35.1MHz			35.1M R-M407A	L0021517		1-	A	C5
TC2001	TRIMMER CAP.	10pF			ECR-KN010C61X	K91000226		1-	A	F7
TH2001	THERMISTOR				NTCG203NH153JT	G9090105		1-	A	G7
TH2002	THERMISTOR				NTCG203SH223JT	G9090106		1-	A	F7
TP2001	TERMINAL				TP-G MK1095	Q5000036		1-	A	B1
TP2002	TERMINAL				TP-G MK1095	Q5000036		1-	A	D1
TP2003	TERMINAL				TP-G MK1095	Q5000036		1-	A	E1
VR2001	POT.	10k			EVN-5ESX50B14	J51811103		1-	A	E6
VR2001	POT.	22k			EVN-5ESX50BE4	J51811223		92-	A	E6
X 2001	XTAL HC-49/U	17.53MHz			17.53MHZ 3P	H0102664		1-	A	D5
X 2001	XTAL HC-49/U	17.53MHz			17.53MHZ 3P	H0103328		90-	A	D5
X 2001	XTAL HC-49/U	17.53MHz			17.53MHZ 3P	H0103340		97-	A	D5
X 2002	XTAL TOP-B	14.4MHz			14.4MHZ	H0103160		1-	A	F7
	SHIELD CASE					RA0060200		1-		
	LEAF SPRING					R0132100		1-		
	LEAF SPRING					R0140031		3		
	LEAF SPRING					R0140031		4-5		
	LEAF SPRING					R0140031	W/ CE	6-		
	LEAF SPRING					R0140031	W/O CE	6-		

IF Unit (Lot. 1 ~ 60)

Circuit Diagram
























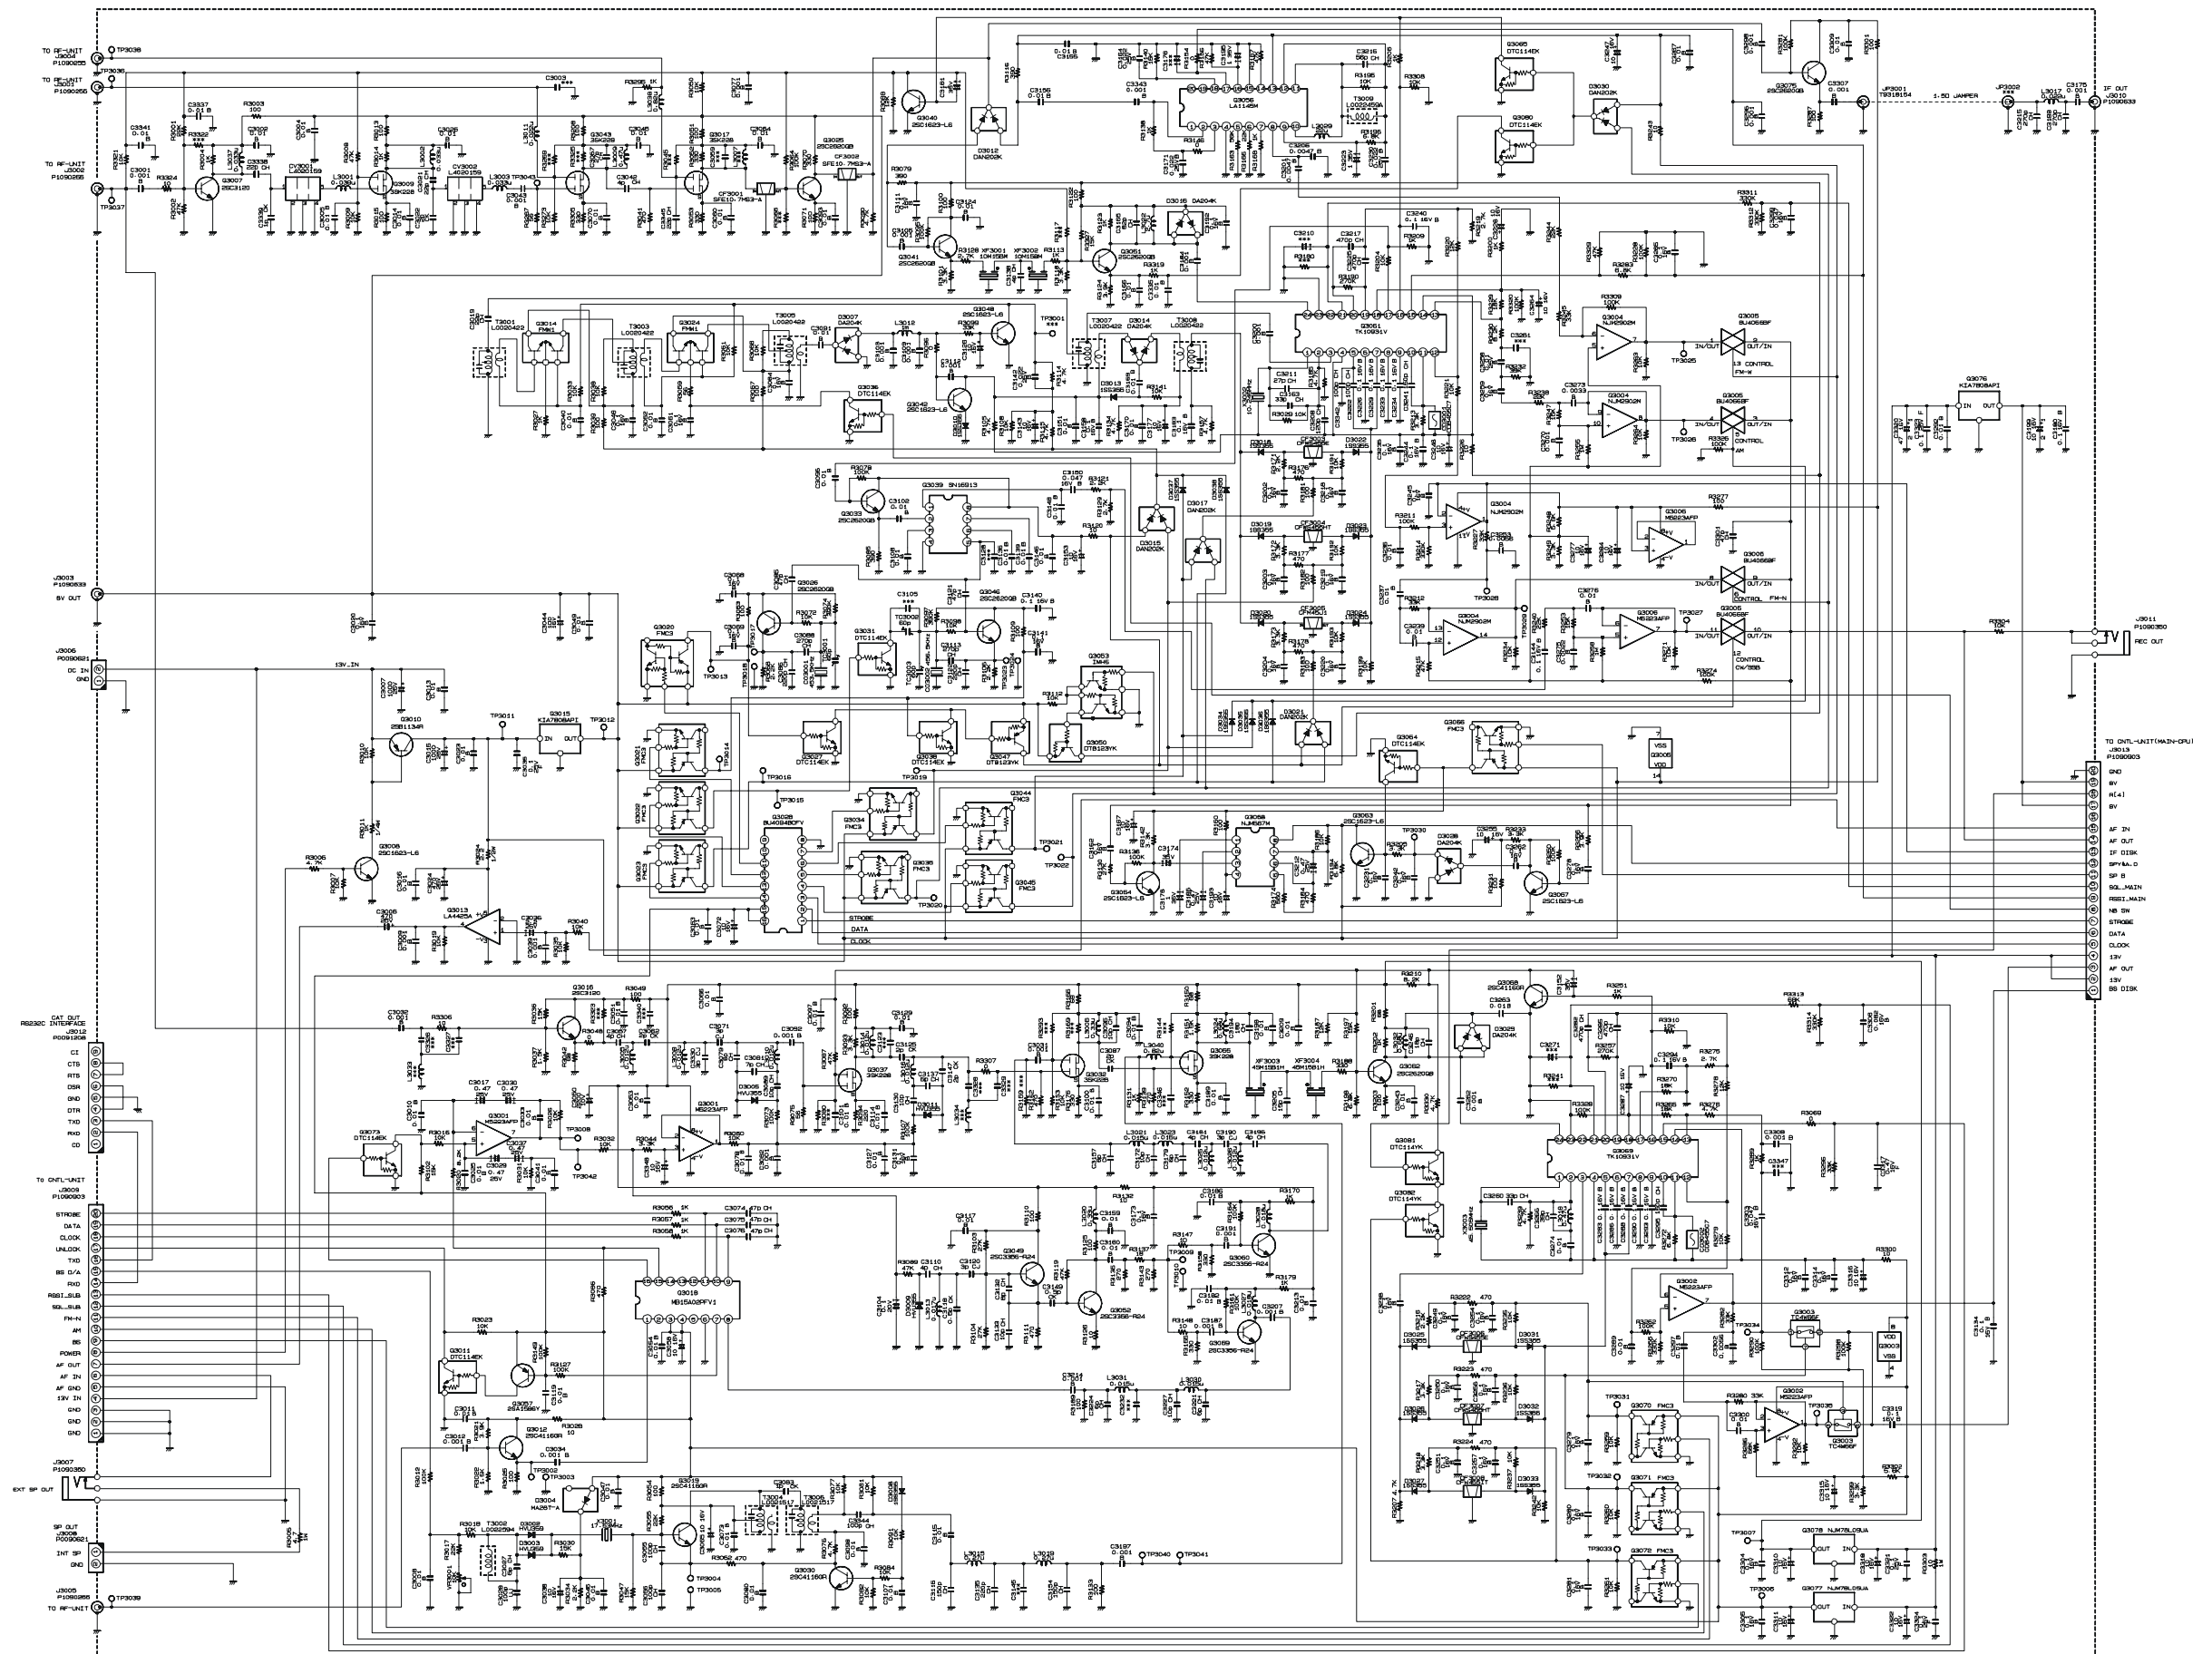


IF Unit (Lot. 1 ~ 60)

Note




IF Unit (Lot. 1 ~ 60)

Parts Layout (Side A)

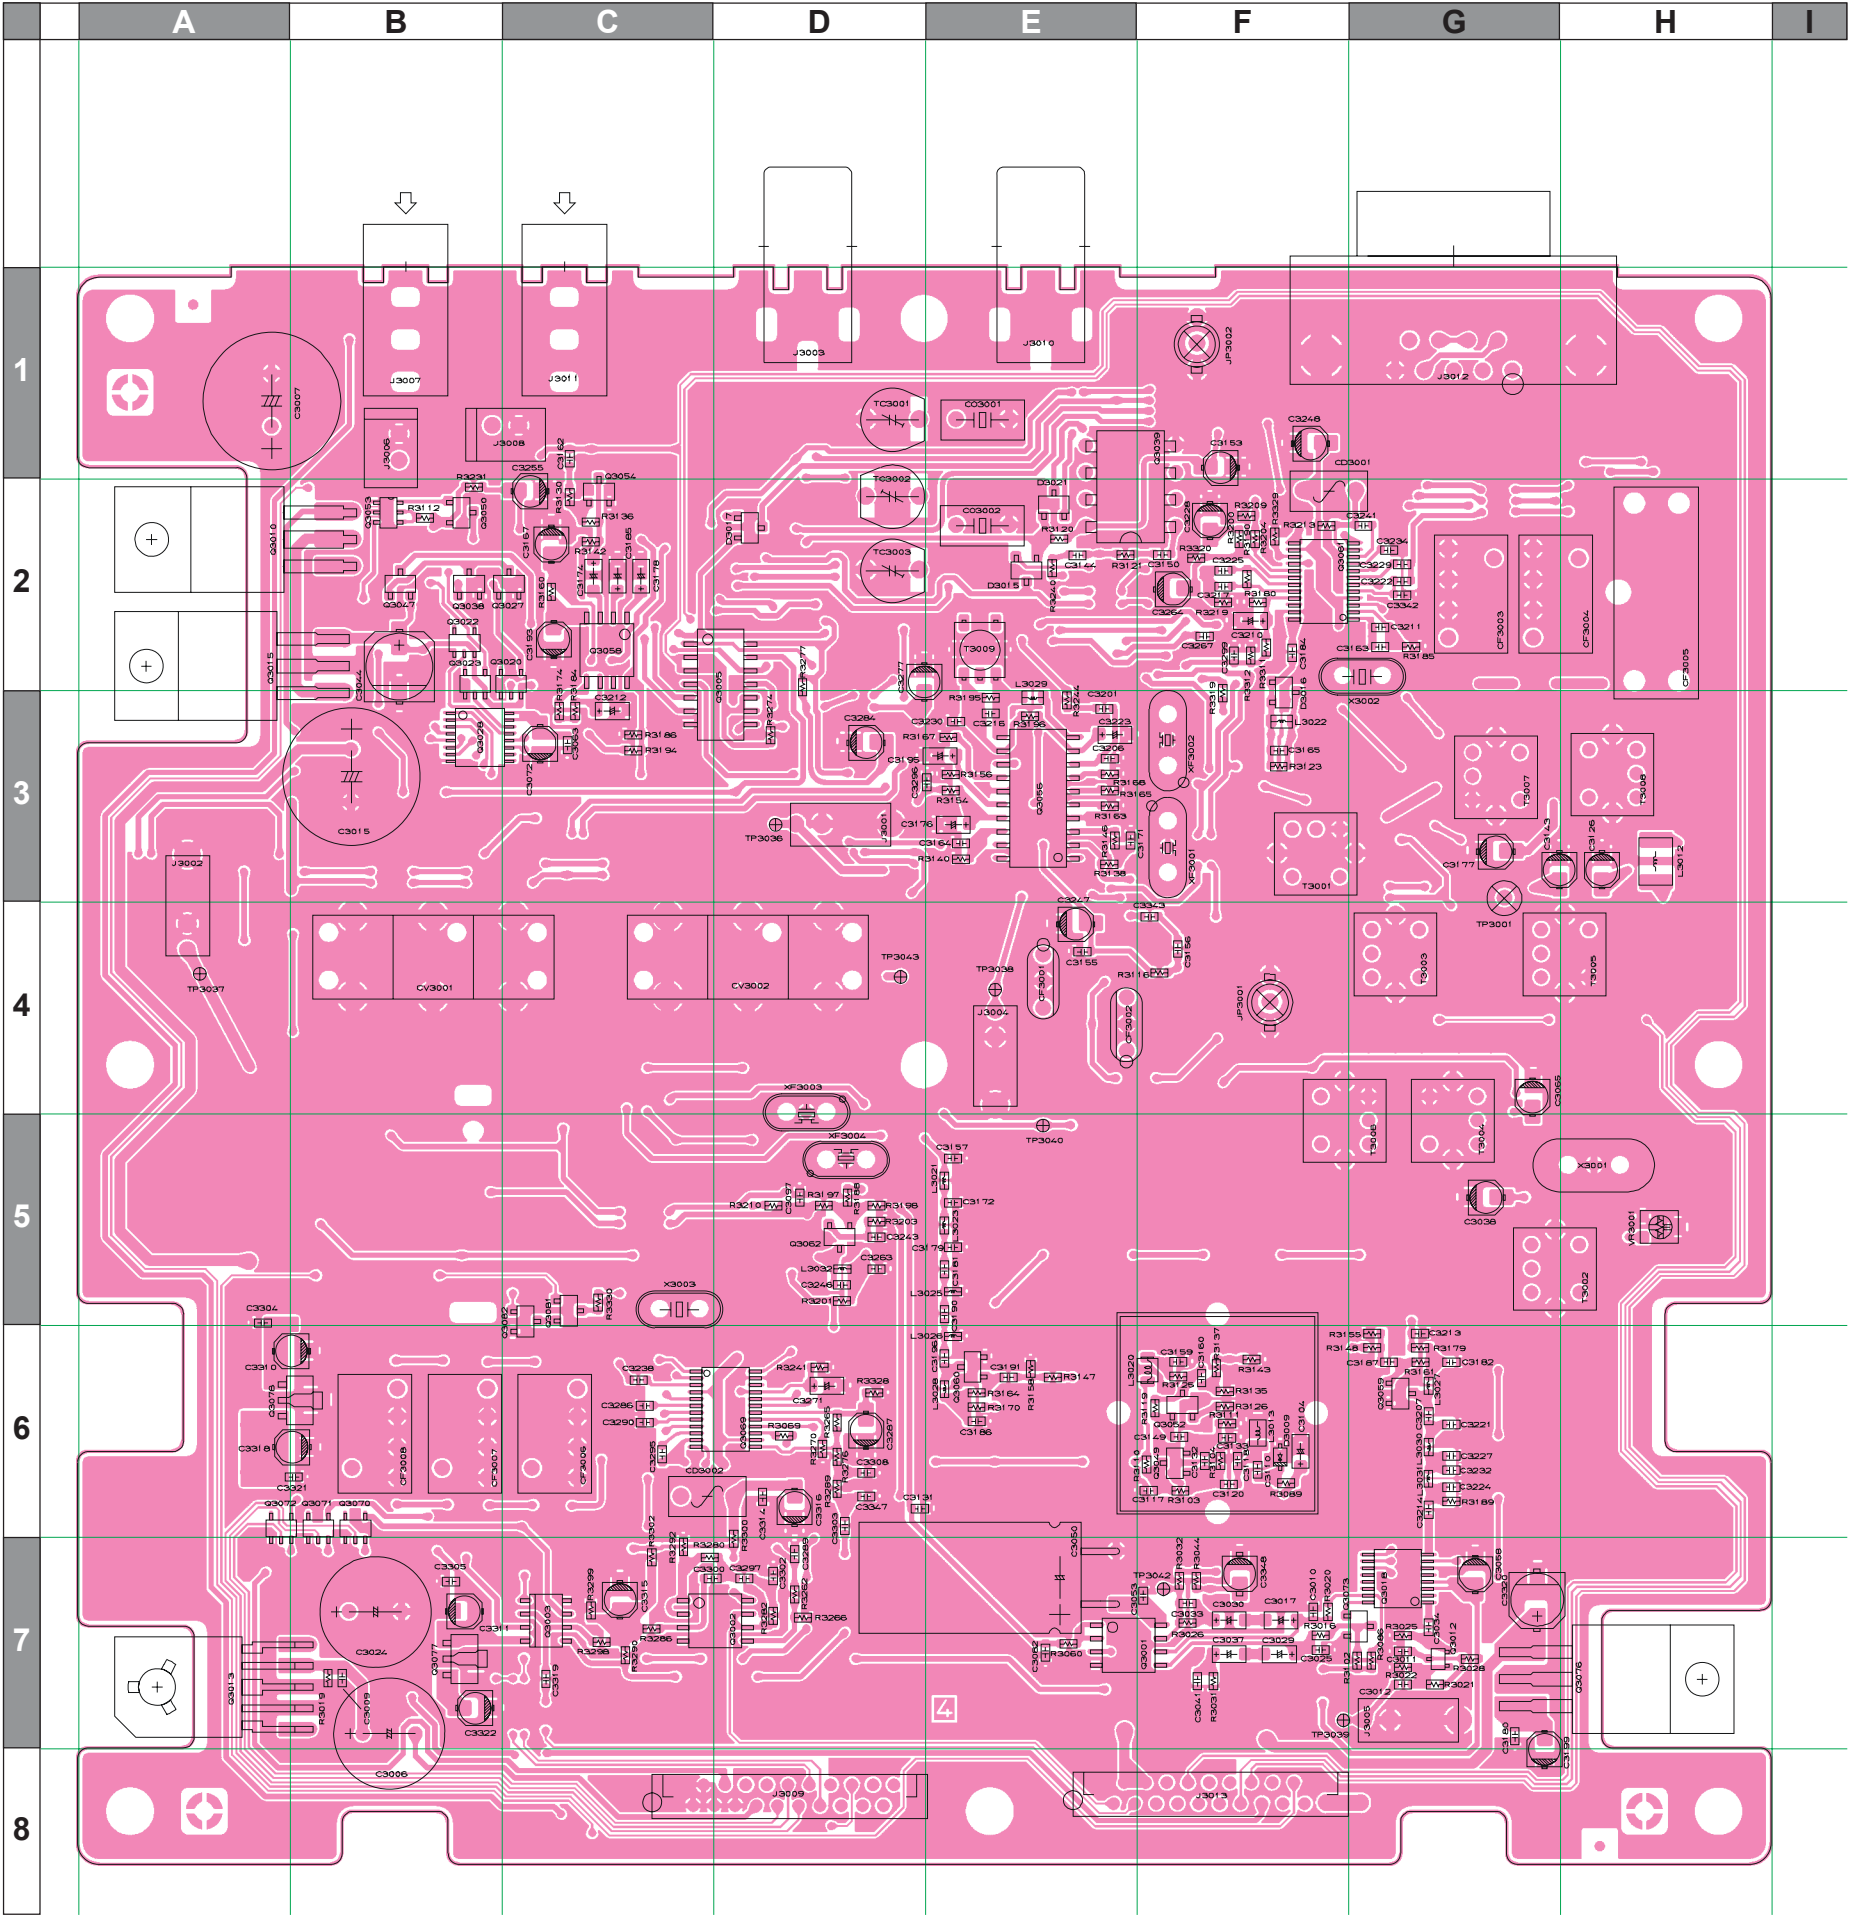


IF Unit (Lot. 1 ~ 60)

Parts Layout (Side B)

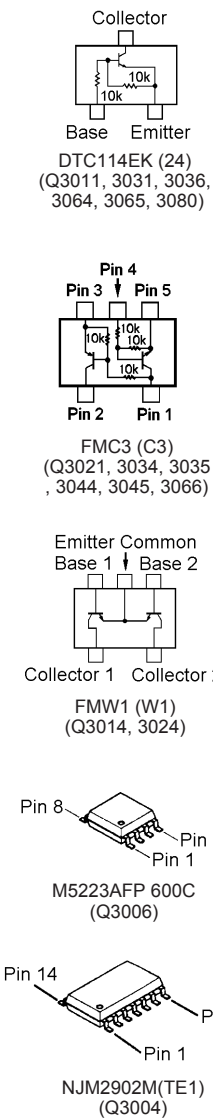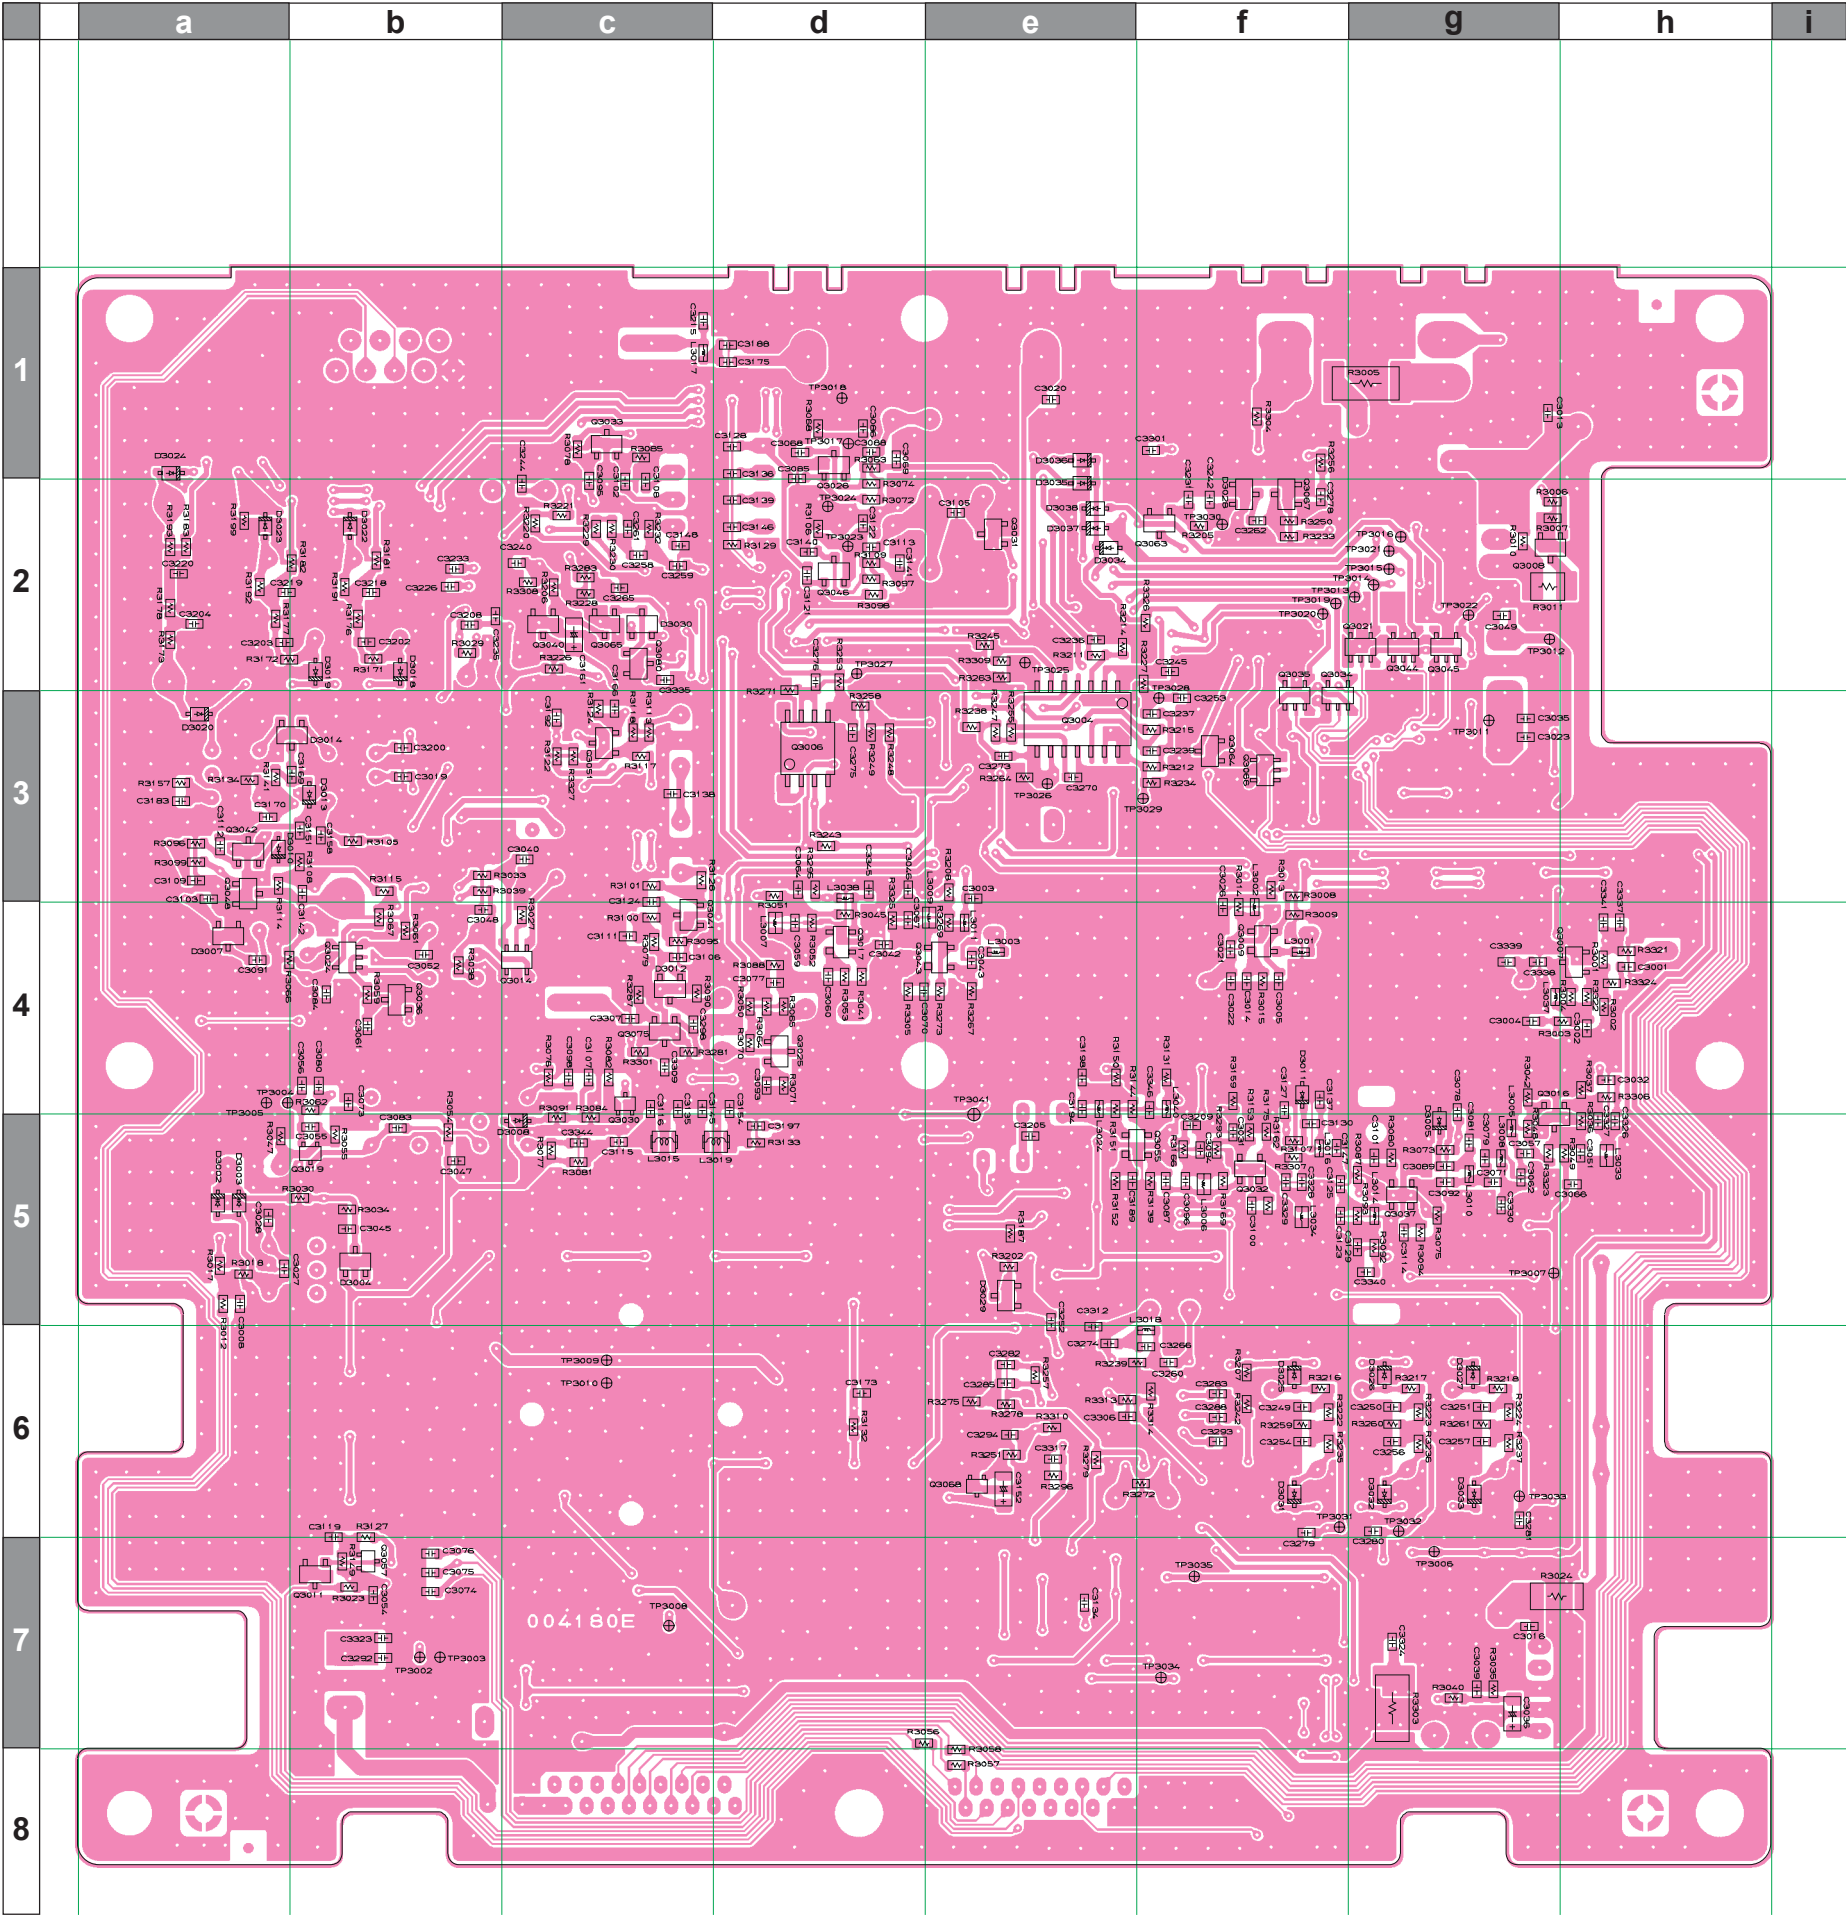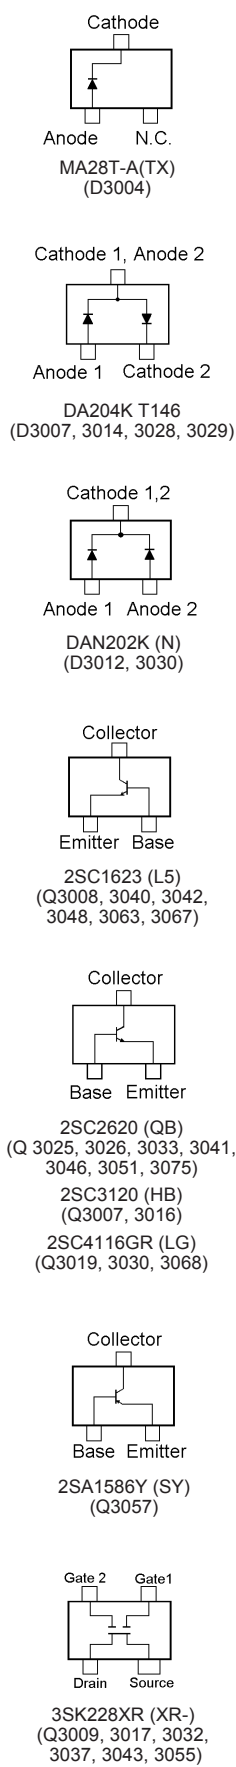

IF Unit (Lot. 61 ~)

Circuit Diagram

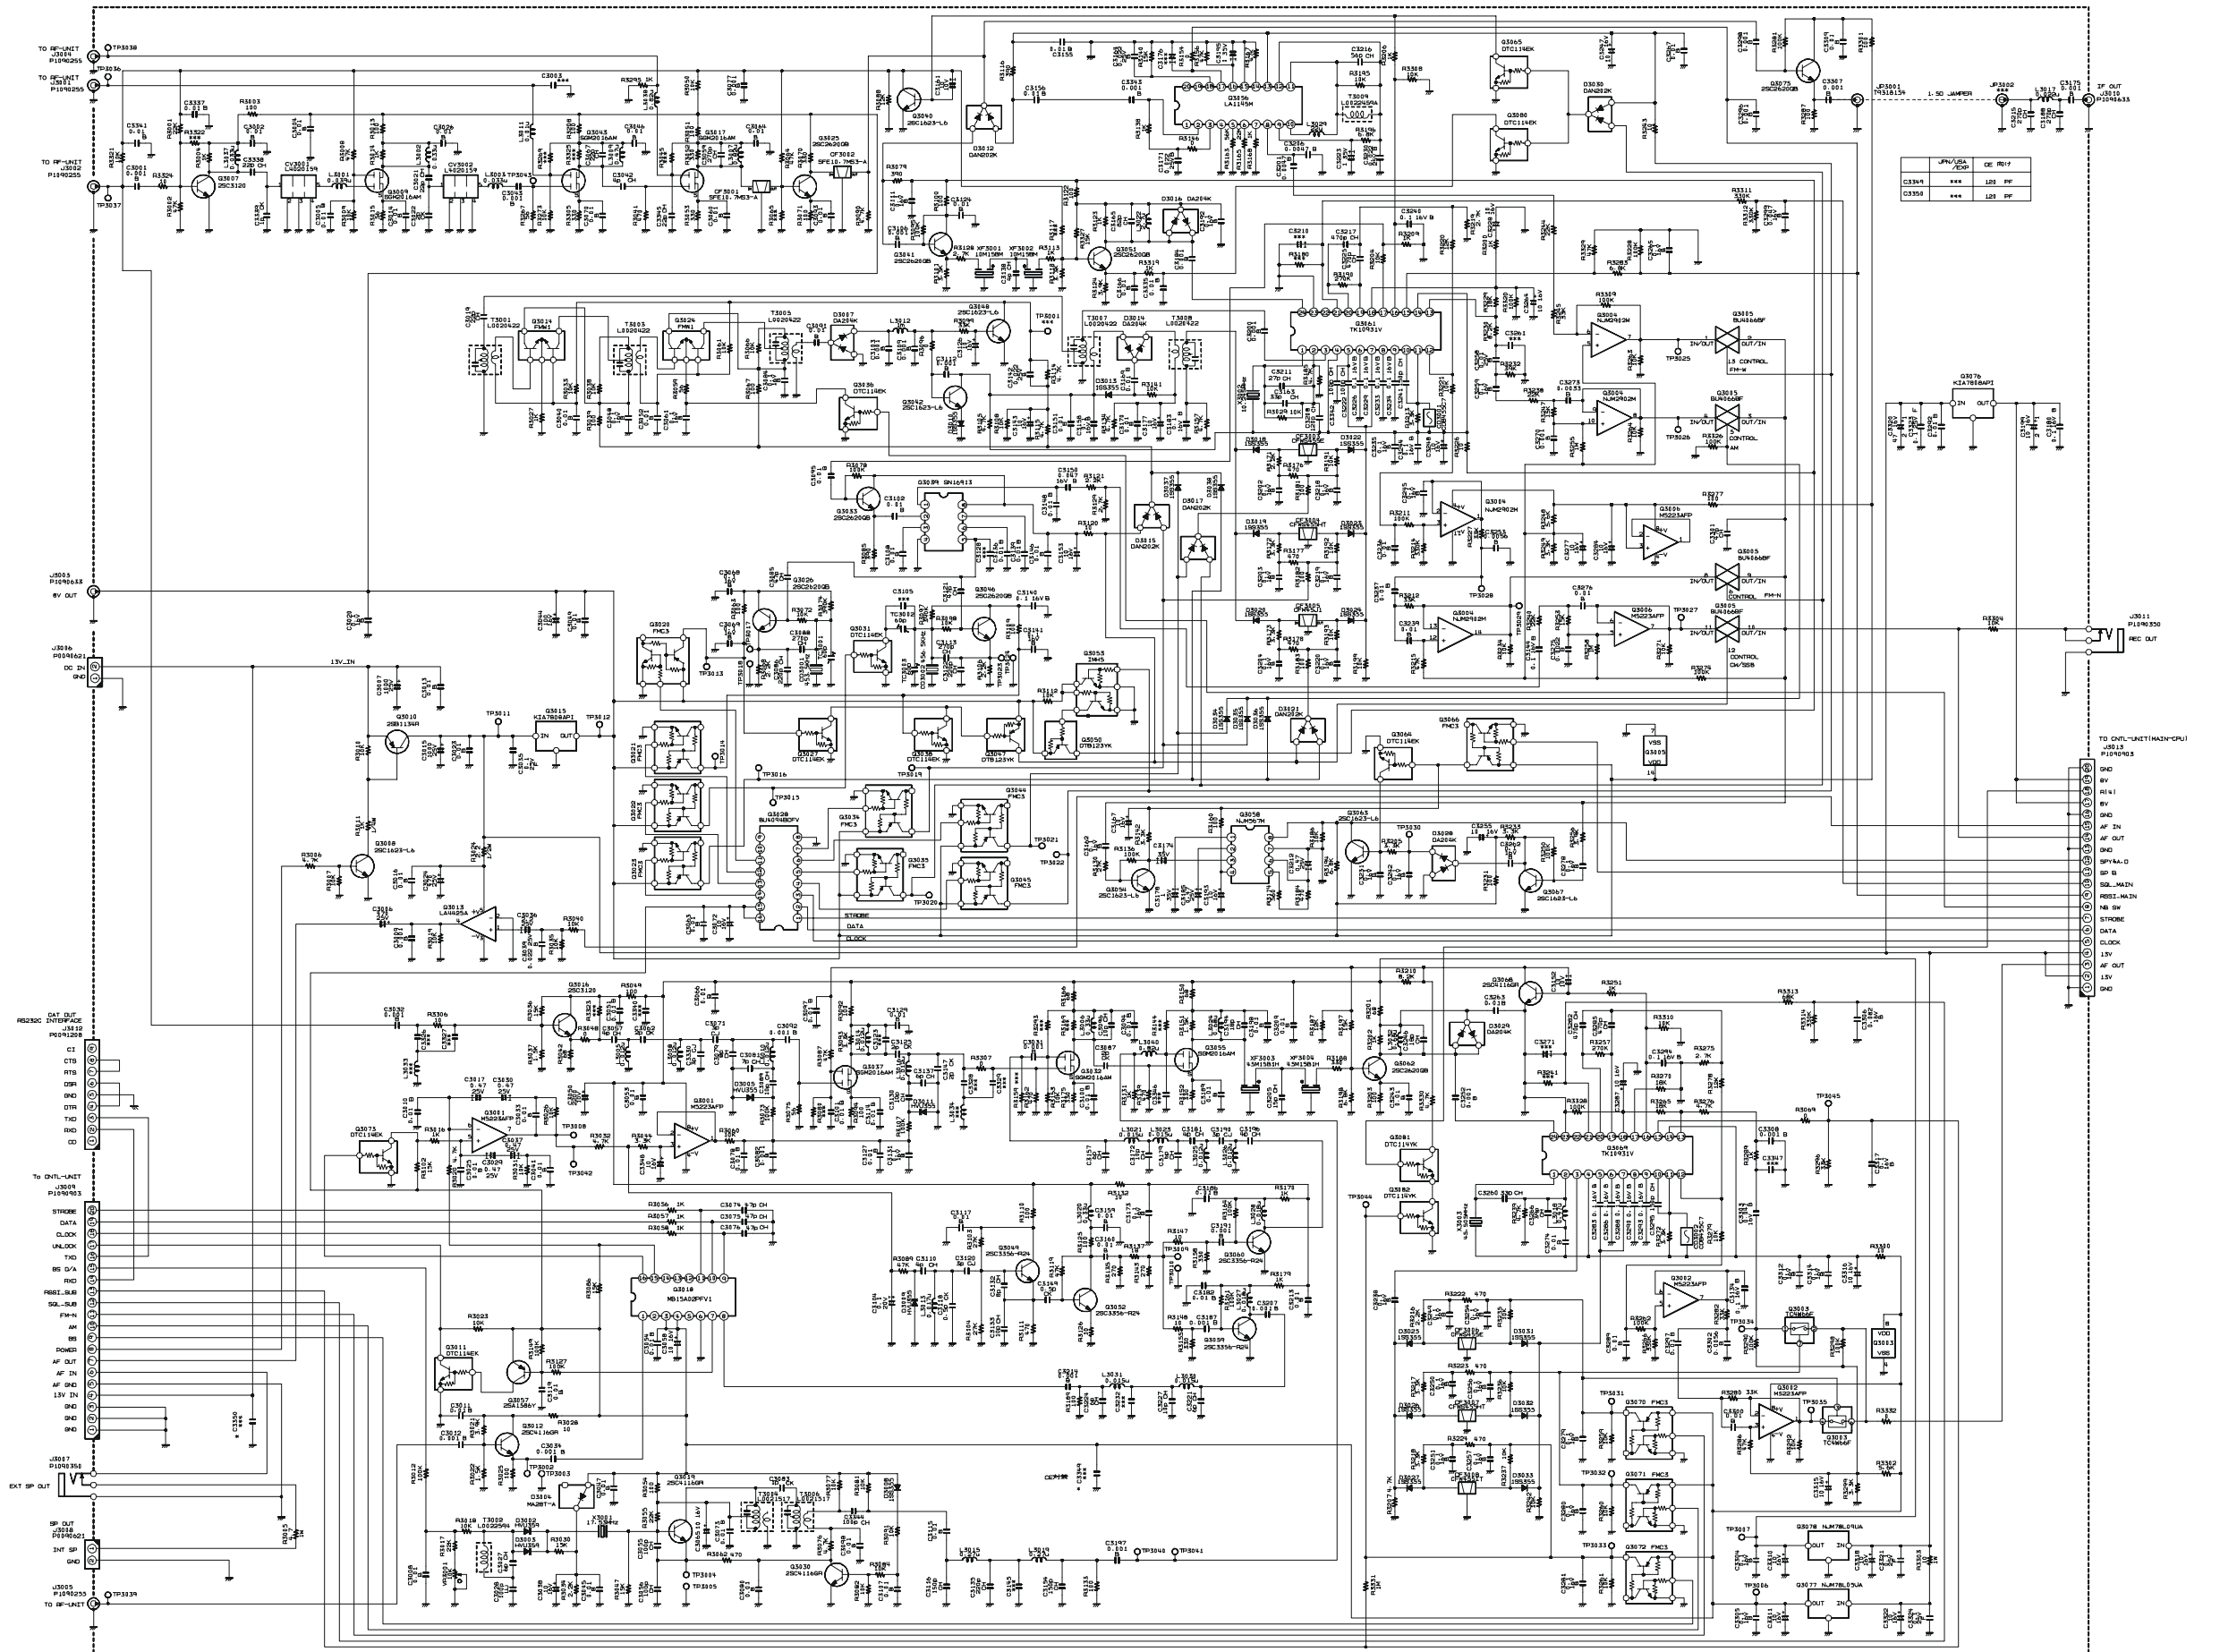


IF Unit (Lot. 61 ~)

Note

IF Unit (Lot. 61 ~)

Parts Layout (Side A)

- Cathode 1, Anode 2
Anode 1 Cathode 2
DA204K (K)
(D3016)
- Cathode 1,2
Anode 1 Anode 2
DAN202K (N)
(D3015, 3017, 3021)
- Collector
Emitter Base
2SC1623 (L5)
(Q3054)
- Collector
Base Emitter
2SC4116GR (LG)
(Q3012)
2SC3356-T2B R24
(Q 3049, 3052, 3059, 3060)
2SC2620 (QB)
(Q3062)
- Collector
Base Emitter
DTB123YK (F52)
(Q3047, 3050)
- Collector
Base Emitter
DTC114EK (24)
(Q3027, 3038, 3073)
- Collector
Base Emitter
DTC114YK (64)
(Q3081, 3082)

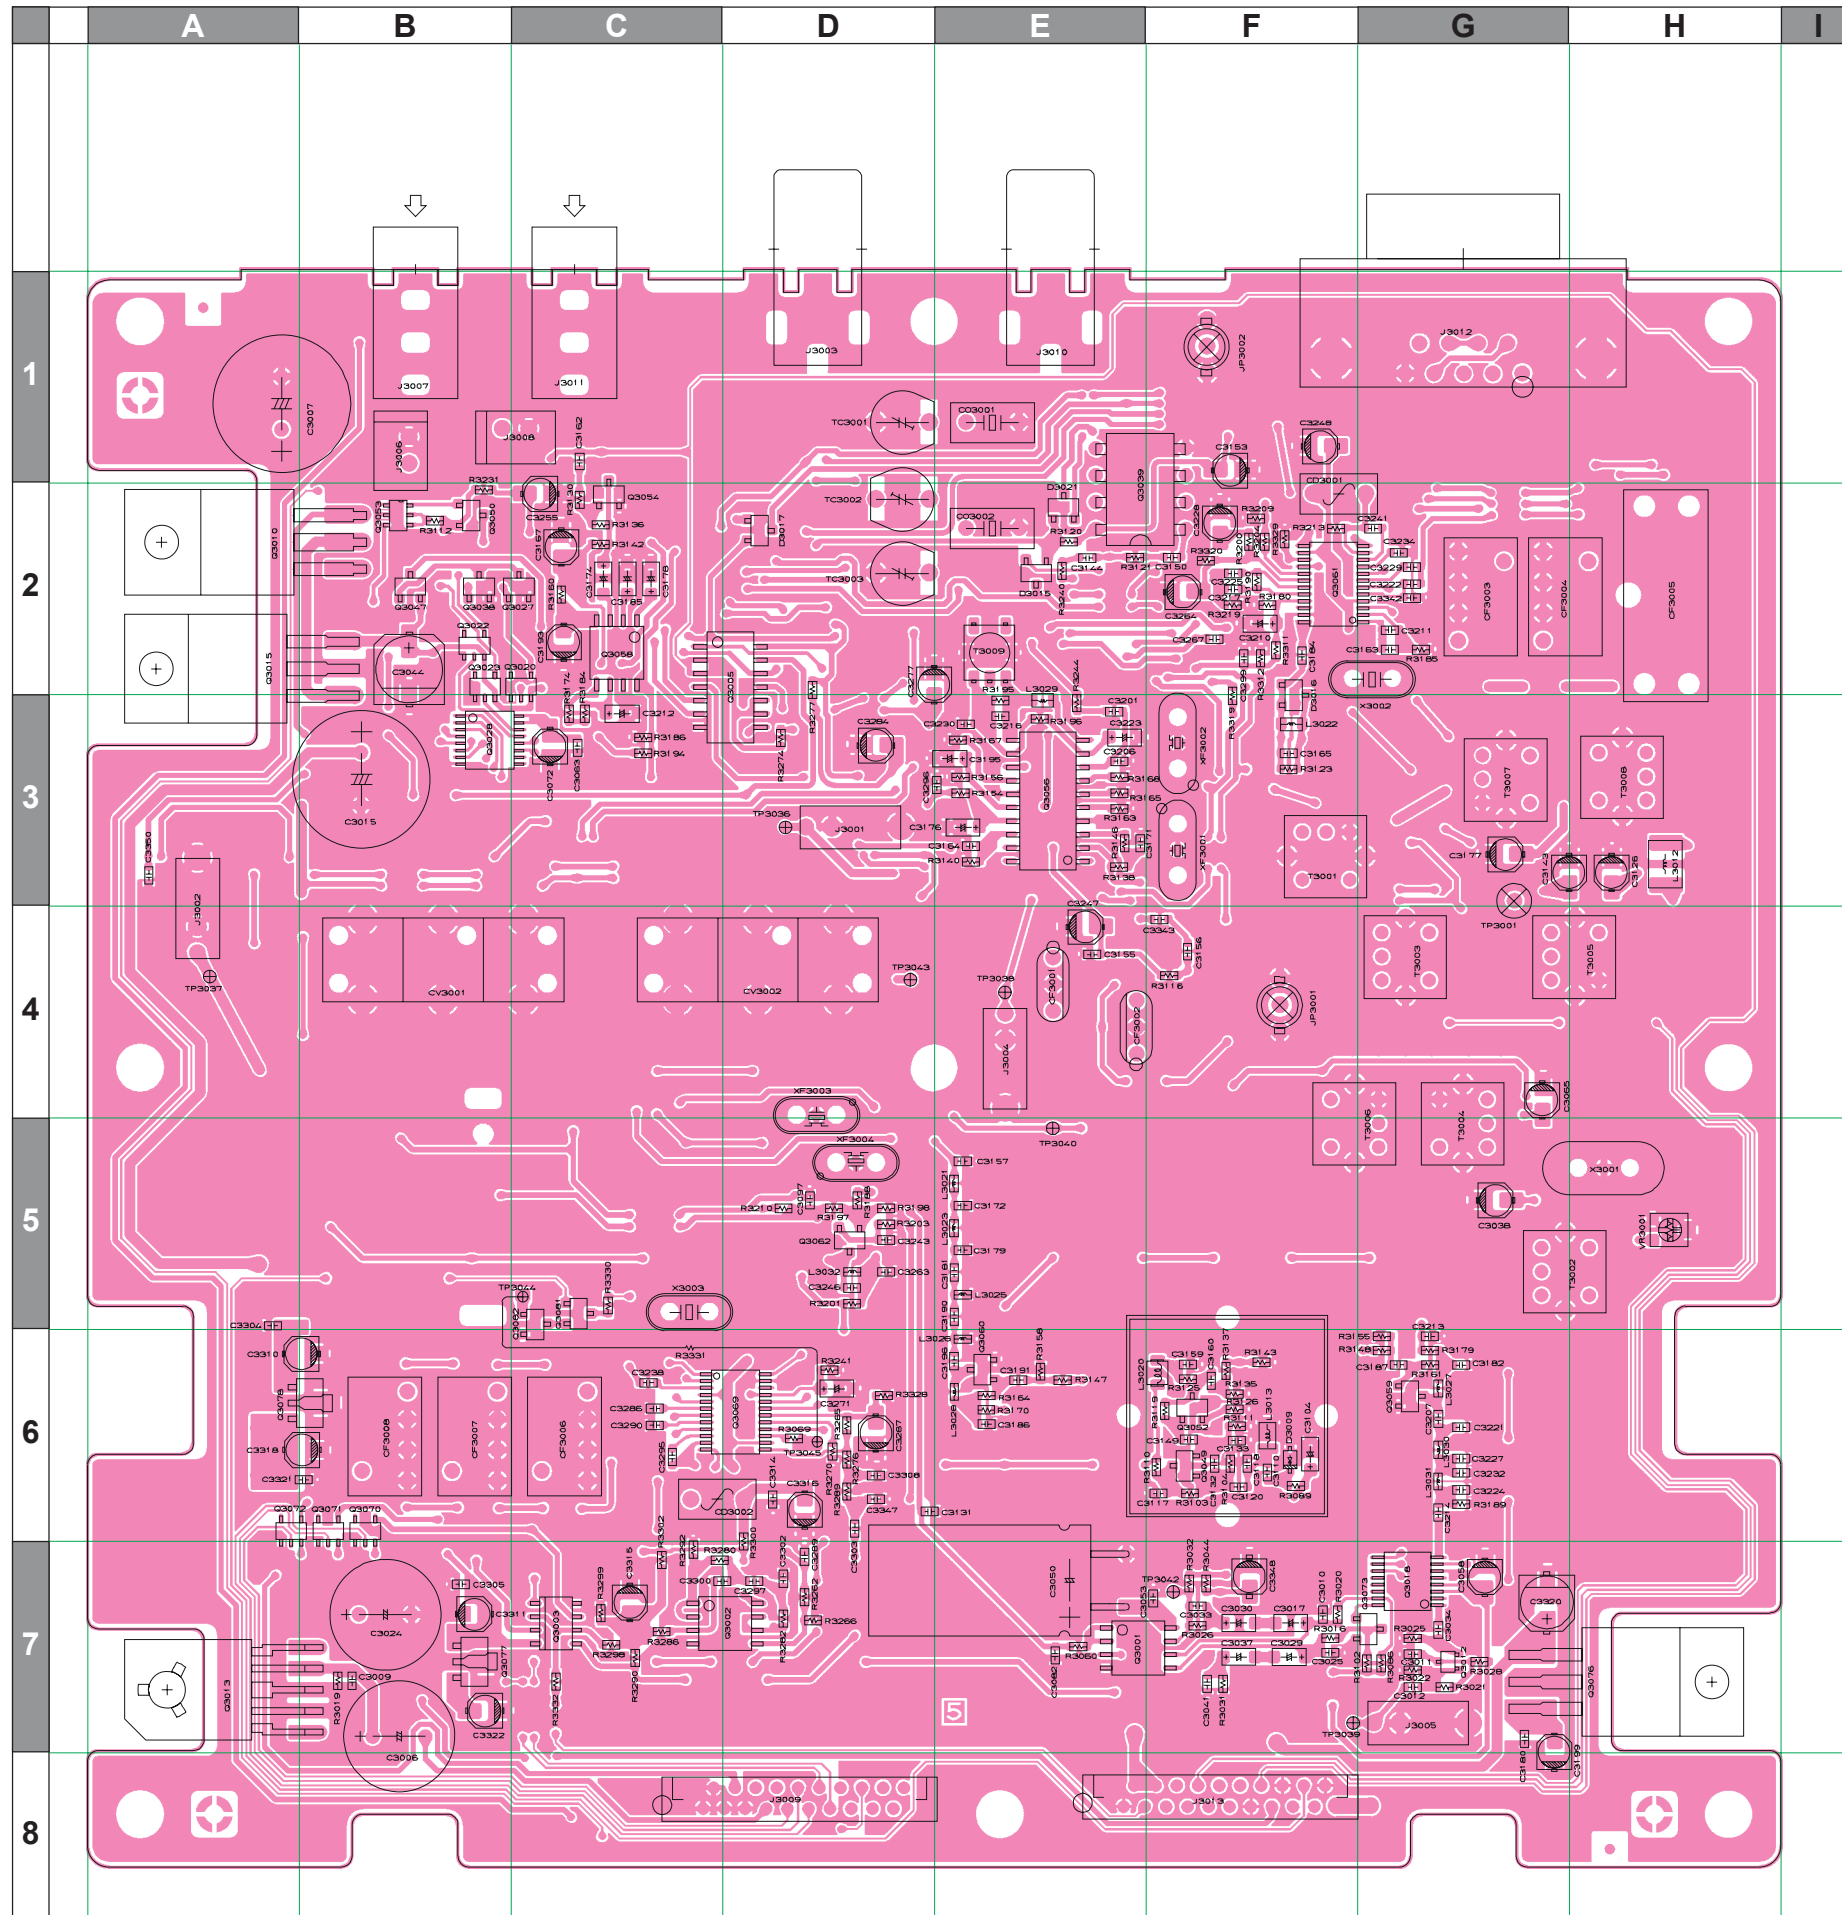

- Pin 4
Pin 3 Pin 5
Pin 2 Pin 1
M5223AFP 600C
(Q3001, 3002)
NJM567M(Te2)
(Q3058)
- Pin 8
Pin 4
Pin 1
TC4W66F TE12L
(Q3003)
- Pin 8
Pin 4
Pin 1
Collector 1 Collector 2
Base 2
IMH5 (H5)
(Q3053)
- Pin 14
Pin 7
Pin 1
BU4066BF-E2
(Q3005)
- 8C
OUT IN
Common
NJM78L05UA (8C)
(Q3077)
- Pin 16
Pin 8
Pin 1
MB15A02PFV1
(Q3018)
- 8H
OUT IN
Common
NJM78L09UA (8H)
(Q3078)
- Pin 14
Pin 7
Pin 1
BU4094BCFV-E1
(Q3028)
- Output
Common
Input
KIA7808API
(Q3015, 3076)
- Pin 24
Pin 12
Pin 1
TK10931VT1
(Q3061, 3069)
- 2SB1134R
(Q3010)
- Pin 1
Pin 5
LA4425A
(Q3013)
- Pin 20
Pin 10
Pin 1
LA1145M-TE-L
(Q3056)
- Pin 8
Pin 4
Pin 1
SN16913P
(Q3039)

IF Unit (Lot. 61 ~)

Parts Layout (Side B)

Cathode
Anode N.C.
MA28T-A(TX)
(D3004)

Cathode 1, Anode 2
Anode 1 Cathode 2
DA204K T146
(D3007, 3014, 3028, 3029)


Cathode 1,2
Anode 1 Anode 2
DAN202K (N)
(D3012, 3030)

Collector
Emitter Base
2SC1623 (L5)
(Q3008, 3040, 3042, 3048, 3063, 3067)

Collector
Base Emitter
2SC2620 (QB)
(Q 3025, 3026, 3033, 3041, 3046, 3051, 3075)
2SC3120 (HB)
(Q3007, 3016)
2SC4116GR (LG)
(Q3019, 3030, 3068)

Collector
Base Emitter
2SA1586Y (SY)
(Q3057)

Gate 2 Gate 1
Drain Source
3SK228XR (XR-)
(Q3009, 3017, 3032, 3037, 3043, 3055)

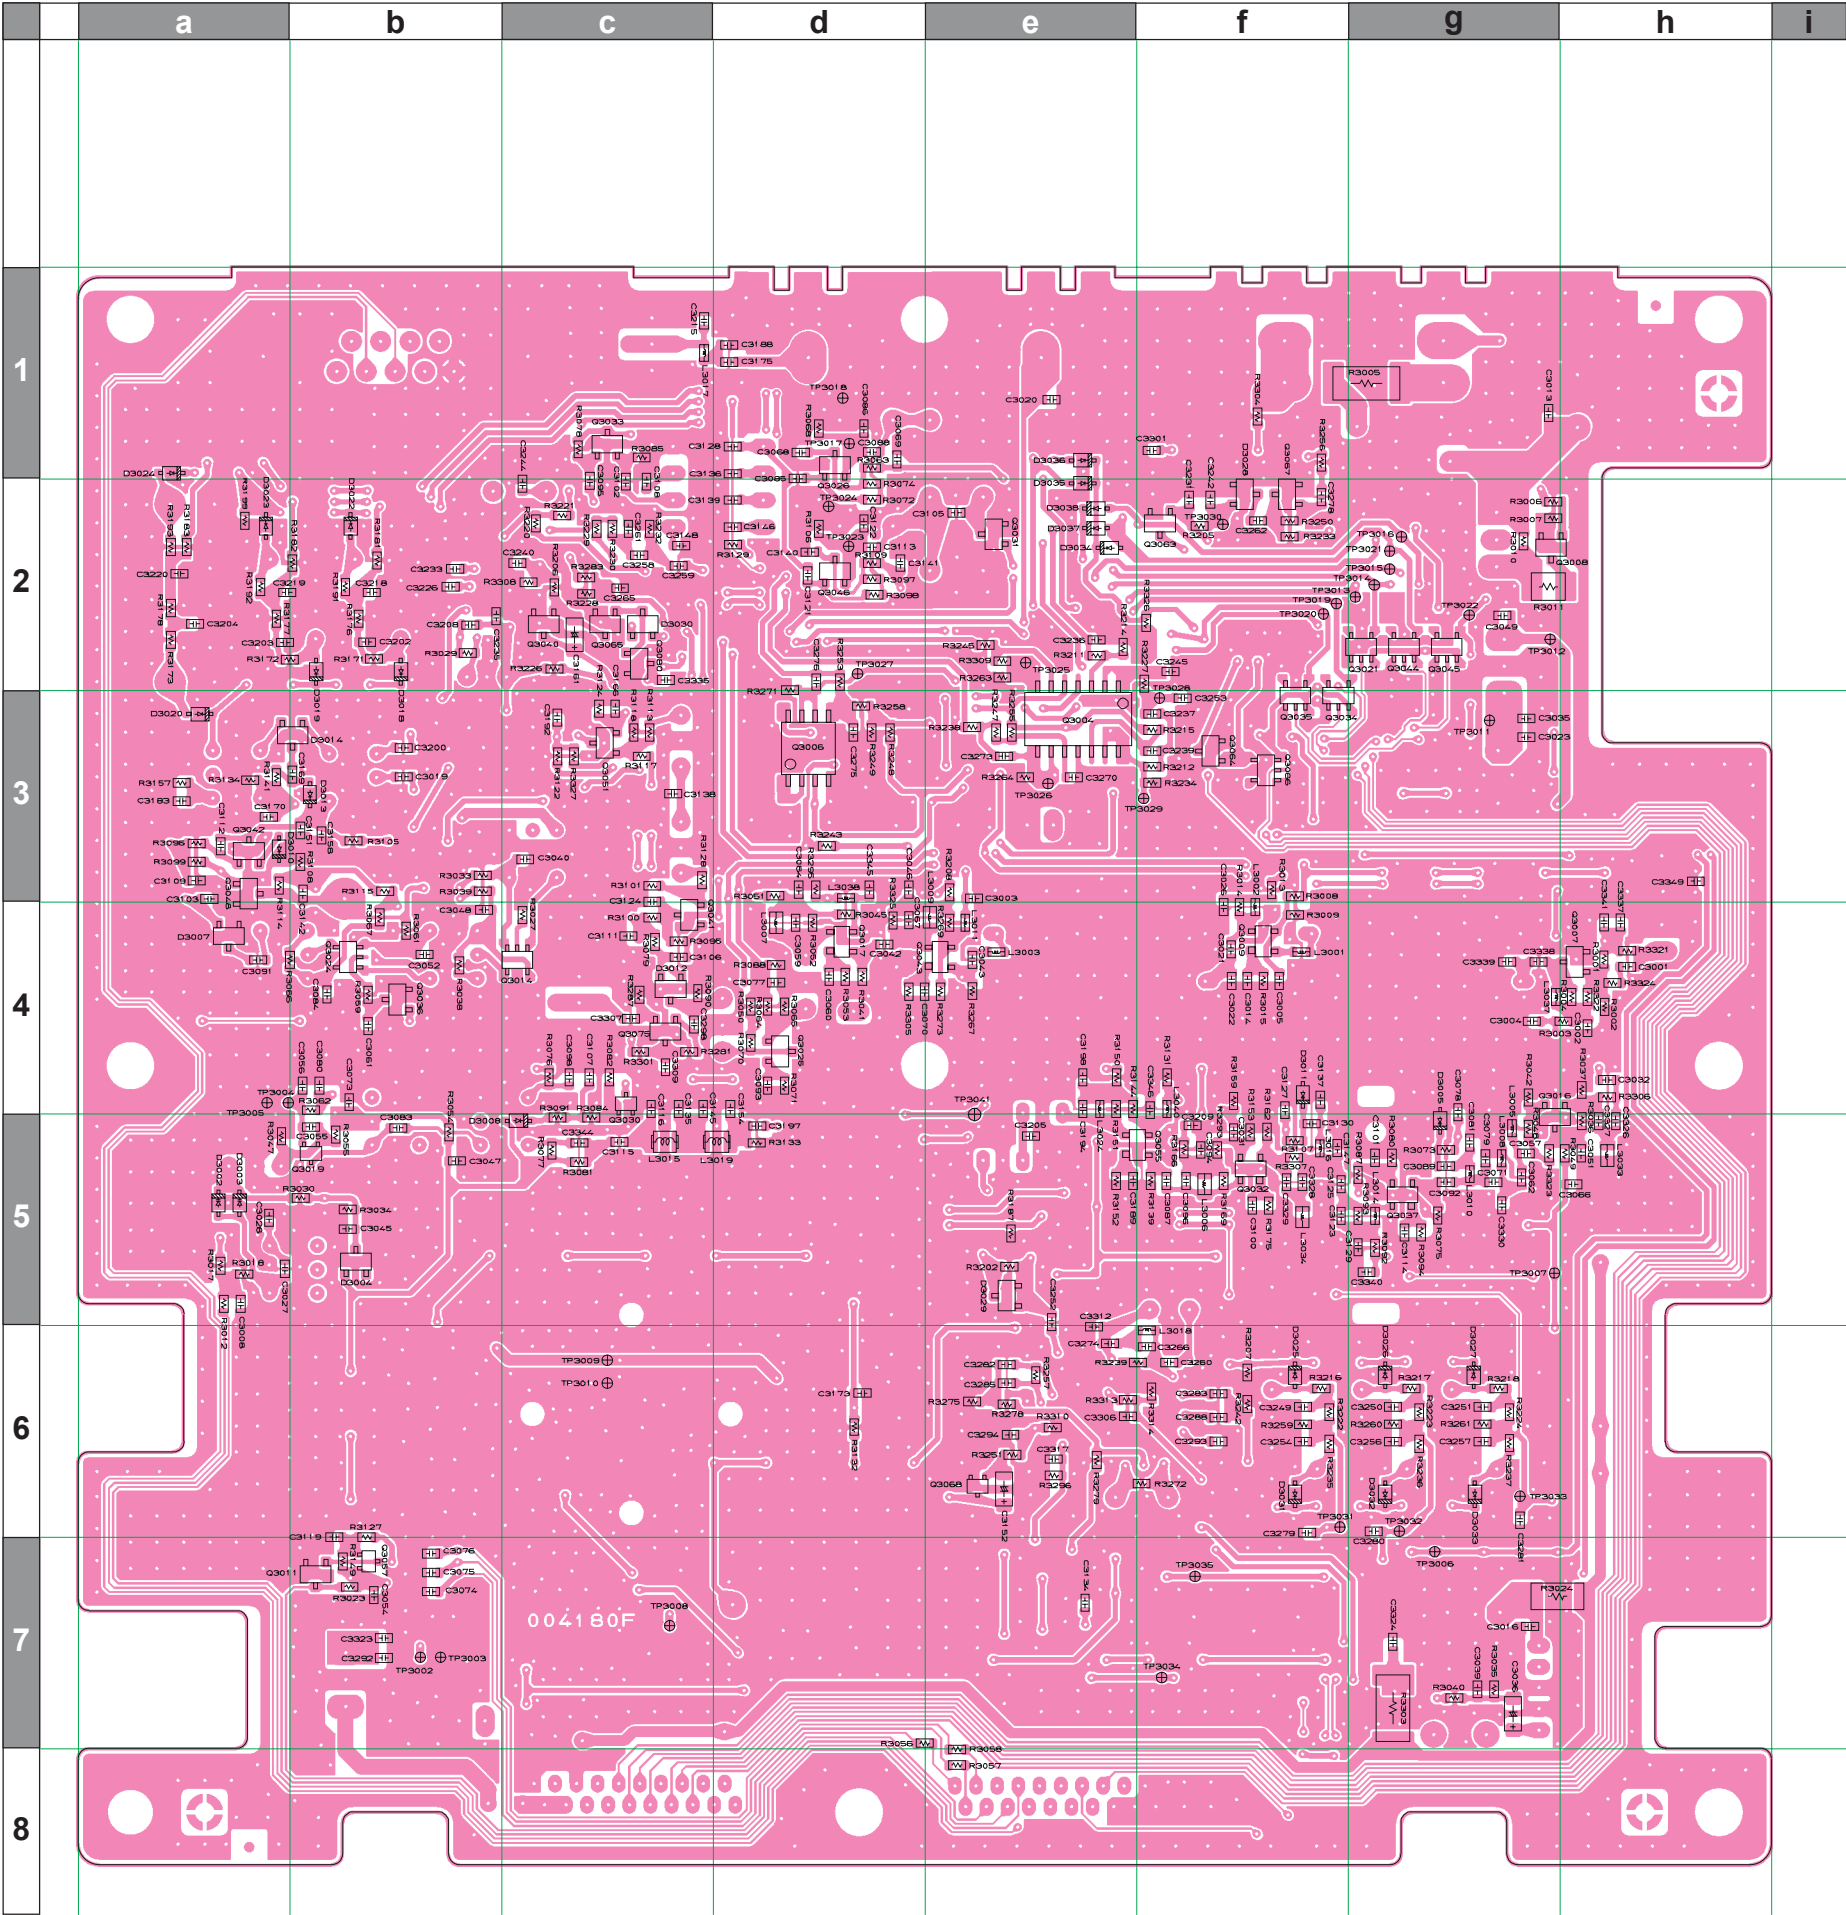

Collector
Base Emitter
DTC114EK (24)
(Q3011, 3031, 3036, 3064, 3065, 3080)

Pin 4
Pin 3 Pin 5
Pin 2 Pin 1
FMC3 (C3)
(Q3021, 3034, 3035, 3044, 3045, 3066)

Emitter Common
Base 1 Base 2
FMC3 (C3)
(Q3021, 3034, 3035, 3044, 3045, 3066)

Collector 1 Collector 2
FMC3 (C3)
(Q3021, 3034, 3035, 3044, 3045, 3066)

Pin 8
Pin 4
Pin 1
M5223AFP 600C
(Q3006)

Pin 14
Pin 7
Pin 1
NJM2902M(Te1)
(Q3004)

IF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
PCB with Components						CB0911001	CE: OFF			
						CB0911002	CE: ON			
Printed Circuit Board						FR004180E		1-		
						FR004180F		61-		
C 3001	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	h4
C 3002	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	h4
C 3004	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	g4
C 3005	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	f4
C 3006	AL.ELECTRO.CAP.	470uF	25V		RE3-25V471MH3#	K40149044		1-	A	B7
C 3007	AL.ELECTRO.CAP.	1000uF	25V		RE2-25V102MI5#	K40149034		1-	A	A1
C 3008	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	a5
C 3009	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	B7
C 3010	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	F7
C 3011	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	G7
C 3012	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	G7
C 3013	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	g1
C 3014	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	f4
C 3015	AL.ELECTRO.CAP.	1000uF	25V		RE2-25V102MI5#	K40149034		1-	A	B3
C 3016	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	g7
C 3017	CHIP TA.CAP.	0.47uF	25V		TEESVA1E474M8R	K78140009		1-	A	F7
C 3019	CHIP CAP.	22pF	50V	CH	GRM1882C1H220JA01D	K22174219		1-	B	b3
C 3020	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	e1
C 3020	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	e1
C 3021	CHIP CAP.	22pF	50V	CH	GRM1882C1H220JA01D	K22174219		1-	B	f4
C 3022	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	B	f4
C 3023	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	g3
C 3024	AL.ELECTRO.CAP.	470uF	25V		RE3-25V471MH3#	K40149044		1-	A	B7
C 3025	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	F7
C 3026	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	f4
C 3027	CHIP CAP.	6pF	50V	CH	GRM1882C1H6R0DZ01D	K22174207		1-	B	a5
C 3028	CHIP CAP.	100pF	50V	UJ	GRM1883U1H101JZ01D	K22174332		1-	B	a5
C 3029	CHIP TA.CAP.	0.47uF	25V		TEESVA1E474M8R	K78140009		1-	A	F7
C 3030	CHIP TA.CAP.	0.47uF	25V		TEESVA1E474M8R	K78140009		1-	A	F7
C 3031	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	f5
C 3032	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	h4
C 3033	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	F7
C 3034	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	G7
C 3035	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	g3
C 3035	CHIP CAP.	0.1uF	25V	F	GRM188F11E104ZA01D	K22145001		3-	B	g3
C 3036	CHIP TA.CAP.	2.2uF	25V		TEESVA1E225M8R	K78140020		1-	B	g7
C 3037	CHIP TA.CAP.	0.47uF	25V		TEESVA1E474M8R	K78140009		1-	A	F7
C 3038	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	G5
C 3038	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	G5
C 3039	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	g7
C 3039	CHIP CAP.	0.022uF	25V	B	GRM39B223K25PT	K22144807		33-	B	g7
C 3040	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	c3
C 3041	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	F7
C 3042	CHIP CAP.	4pF	50V	CH	GRM1882C1H4R0CZ01D	K22174205		1-	B	d4
C 3043	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	e4
C 3044	AL.ELECTRO.CAP.	100uF	16V		EEE1CA101WP	K48120012		1-	A	B2
C 3045	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	b5
C 3046	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	d3
C 3047	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	b5
C 3048	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	b4
C 3048	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	b4
C 3049	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	g2
C 3050	AL.ELECTRO.CAP.	2200uF	10V		RE3-10V222MH5#	K40109032		1-	A	E7
C 3051	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	h5
C 3052	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	b4
C 3053	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	F7
C 3054	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	b7
C 3055	CHIP CAP.	100pF	50V	CH	GRM1882C1H101JA01D	K22174235		1-	B	b5
C 3056	CHIP CAP.	100pF	50V	CH	GRM1882C1H101JA01D	K22174235		1-	B	b4
C 3057	CHIP CAP.	4pF	50V	CH	GRM1882C1H4R0CZ01D	K22174205		1-	B	g5
C 3058	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	G7

IF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 3058	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	G7
C 3059	CHIP CAP.	270pF	50V	CH	GRM1882C1H271JA01D	K22174251		61-	B	d4
C 3060	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	d4
C 3061	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	b4
C 3061	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	b4
C 3062	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	B	g5
C 3063	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	C3
C 3064	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	d3
C 3065	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	G4
C 3065	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	G4
C 3066	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	h5
C 3067	CHIP CAP.	27pF	50V	CH	GRM1882C1H270JA01D	K22174221		1-	B	d4
C 3067	CHIP CAP.	22pF	50V	CH	GRM1882C1H220JA01D	K22174219		61-	B	d4
C 3068	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	d1
C 3068	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	d1
C 3069	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	d1
C 3069	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	d1
C 3070	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	e4
C 3071	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	B	g5
C 3072	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	C3
C 3072	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	C3
C 3073	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	b4
C 3074	CHIP CAP.	47pF	50V	CH	GRM1882C1H470JA01D	K22174227		1-	B	b7
C 3075	CHIP CAP.	47pF	50V	CH	GRM1882C1H470JA01D	K22174227		1-	B	b7
C 3076	CHIP CAP.	47pF	50V	CH	GRM1882C1H470JA01D	K22174227		1-	B	b7
C 3077	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	d4
C 3078	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	g4
C 3079	CHIP CAP.	8pF	50V	CH	GRM1882C1H8R0DZ01D	K22174209		1-	B	g5
C 3080	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	b4
C 3081	CHIP CAP.	7pF	50V	CH	GRM1882C1H7R0DZ01D	K22174208		1-	B	g5
C 3082	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E7
C 3083	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		1-	B	b5
C 3084	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	b4
C 3084	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	b4
C 3085	CHIP CAP.	47pF	50V	CH	GRM1882C1H470JA01D	K22174227		1-	B	d2
C 3086	CHIP CAP.	220pF	50V	CH	GRM1882C1H221JA01D	K22174243		1-	B	d1
C 3087	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	B	f5
C 3088	CHIP CAP.	270pF	50V	CH	GRM1882C1H271JA01D	K22174251		1-	B	d1
C 3089	CHIP CAP.	10pF	50V	CH	GRM1882C1H100JA01D	K22174211		1-	B	g5
C 3091	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	a4
C 3092	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	g5
C 3093	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	d4
C 3094	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	f5
C 3095	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	c2
C 3096	CHIP CAP.	10pF	50V	CH	GRM1882C1H100JA01D	K22174211		1-	B	f5
C 3097	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D5
C 3098	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	c4
C 3100	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	f5
C 3101	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	g5
C 3102	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	c2
C 3103	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	a3
C 3104	CHIP TA.CAP.	0.1uF	20V		TEESVA21D104M8R	K78130020		1-	A	F6
C 3106	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	c4
C 3107	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	c4
C 3108	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	c2
C 3109	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	a3
C 3110	CHIP CAP.	4pF	50V	CH	GRM1882C1H4R0CZ01D	K22174205		1-	A	F6
C 3111	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	c4
C 3111	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	c4
C 3112	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	a3
C 3113	CHIP CAP.	270pF	50V	CH	GRM1882C1H271JA01D	K22174251		1-	B	d2
C 3114	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	g5
C 3115	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	c5
C 3116	CHIP CAP.	150pF	50V	CH	GRM1882C1H151JA01D	K22174239		1-	B	c4
C 3117	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	F6

IF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 3118	CHIP CAP.	0.5pF	50V	CK	GRM1884C1HR50CZ01D	K22174201		1-	A	F6
C 3119	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	b7
C 3120	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	F6
C 3121	CHIP CAP.	47pF	50V	CH	GRM1882C1H470JA01D	K22174227		1-	B	d2
C 3122	CHIP CAP.	220pF	50V	CH	GRM1882C1H221JA01D	K22174243		1-	B	d2
C 3124	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	c4
C 3125	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	B	f5
C 3126	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	H3
C 3126	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	H3
C 3127	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	f4
C 3129	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	g5
C 3130	CHIP CAP.	10pF	50V	CH	GRM1882C1H100JA01D	K22174211		1-	B	f5
C 3131	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	D6
C 3131	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	D6
C 3132	CHIP CAP.	8pF	50V	CH	GRM1882C1H8R0DZ01D	K22174209		1-	A	F6
C 3133	CHIP CAP.	10pF	50V	CH	GRM1882C1H100JA01D	K22174211		1-	A	F6
C 3134	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	e7
C 3134	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	e7
C 3135	CHIP CAP.	220pF	50V	CH	GRM1882C1H221JA01D	K22174243		1-	B	c4
C 3136	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	d1
C 3137	CHIP CAP.	6pF	50V	CH	GRM1882C1H6R0DZ01D	K22174207		1-	B	f4
C 3138	CHIP CAP.	4pF	50V	CH	GRM1882C1H4R0CZ01D	K22174205		1-	B	c3
C 3139	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	d2
C 3140	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	d2
C 3140	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	d2
C 3141	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	d2
C 3141	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	d2
C 3142	CHIP CAP.	0.022uF	25V	B	GRM39B223K25PT	K22144807		1-	B	b3
C 3143	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	H3
C 3143	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	H3
C 3144	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	E2
C 3144	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	E2
C 3146	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	d2
C 3147	CHIP CAP.	2pF	50V	CK	GRM1884C1H2R0CZ01D	K22174203		1-	B	f5
C 3148	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	c2
C 3149	CHIP CAP.	0.5pF	50V	CK	GRM1884C1HR50CZ01D	K22174201		1-	A	F6
C 3150	CHIP CAP.	0.047uF	50V	B	GRM40B473M50PT	K22170823		1-	A	F2
C 3150	CHIP CAP.	0.047uF	16V	B	GRM39B473K16PT	K22124804		3-	A	F2
C 3151	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	b3
C 3152	CHIP TA.CAP.	1uF	35V		TEESVA1V105M8R	K78160032		1-	B	e6
C 3152	CHIP TA.CAP.	10uF	10V		TEESVA1A106M8R	K78100028		3-	B	e6
C 3153	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	F1
C 3153	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	F1
C 3154	CHIP CAP.	150pF	50V	CH	GRM1882C1H151JA01D	K22174239		1-	B	d4
C 3155	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	E4
C 3156	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	F4
C 3157	CHIP CAP.	6pF	50V	CH	GRM1882C1H6R0DZ01D	K22174207		1-	A	E5
C 3158	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	b3
C 3158	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	b3
C 3159	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	F6
C 3160	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	F6
C 3161	CHIP TA.CAP.	1uF	35V		TEESVA1V105M8R	K78160032		1-	B	c2
C 3161	CHIP TA.CAP.	10uF	10V		TEESVA1A106M8R	K78100028		3-	B	c2
C 3162	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	C1
C 3162	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	C1
C 3163	CHIP CAP.	33pF	50V	CH	GRM1882C1H330JA01D	K22174223		1-	A	G2
C 3164	CHIP CAP.	0.022uF	25V	B	GRM39B223K25PT	K22144807		1-	A	E3
C 3165	CHIP CAP.	82pF	50V	CH	GRM1882C1H820JA01D	K22174233		1-	A	F3
C 3166	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	c3
C 3167	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	C2
C 3167	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	C2
C 3169	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	b3
C 3170	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	a3
C 3171	CHIP CAP.	0.022uF	25V	B	GRM39B223K25PT	K22144807		1-	A	E3
C 3172	CHIP CAP.	10pF	50V	CH	GRM1882C1H100RZ01D	K22174248		1-	A	E5

IF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 3173	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	d6
C 3173	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	d6
C 3174	CHIP TA.CAP.	1uF	35V		TEESVA1V105M8R	K78160032		1-	A	C2
C 3175	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	d1
C 3177	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	G3
C 3177	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	G3
C 3178	CHIP TA.CAP.	1uF	35V		TEESVA1V105M8R	K78160032		1-	A	C2
C 3179	CHIP CAP.	6pF	50V	CH	GRM1882C1H6R0DZ01D	K22174207		1-	A	E5
C 3180	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	G7
C 3180	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	G7
C 3181	CHIP CAP.	4pF	50V	CH	GRM1882C1H4R0CZ01D	K22174205		1-	A	E5
C 3182	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	G6
C 3183	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	a3
C 3183	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	a3
C 3184	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	F2
C 3185	CHIP TA.CAP.	0.47uF	25V		TEESVA1E474M8R	K78140009		1-	A	C2
C 3186	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	E6
C 3187	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	G6
C 3188	CHIP CAP.	270pF	50V	CH	GRM1882C1H271JA01D	K22174251		1-	B	d1
C 3189	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	e5
C 3190	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	A	E5
C 3191	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E6
C 3192	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	c3
C 3192	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	c3
C 3193	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	C2
C 3193	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	C2
C 3194	CHIP CAP.	18pF	50V	CH	GRM1882C1H180JA01D	K22174217		1-	B	e4
C 3195	CHIP TA.CAP.	1uF	35V		TEESVA1V105M8R	K78160032		1-	A	E3
C 3196	CHIP CAP.	4pF	50V	CH	GRM1882C1H4R0CZ01D	K22174205		1-	A	E6
C 3197	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	d5
C 3198	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	e4
C 3199	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	G8
C 3199	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	G8
C 3200	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	b3
C 3201	CHIP CAP.	0.0047uF	50V	B	GRM40B472M50PT	K22170813		1-	A	E3
C 3201	CHIP CAP.	0.0047uF	50V	B	GRM188B11H472KA01D	K22174817		3-	A	E3
C 3202	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	b2
C 3202	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	b2
C 3203	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	a2
C 3203	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	a2
C 3204	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	a2
C 3204	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	a2
C 3205	CHIP CAP.	15pF	50V	CH	GRM1882C1H150JA01D	K22174215		1-	B	e5
C 3206	CHIP CAP.	0.0047uF	50V	B	GRM188B11H472KA01D	K22174817		1-	A	E3
C 3207	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	G6
C 3208	CHIP CAP.	120pF	50V	CH	GRM1882C1H121JA01D	K22174237		1-	B	b2
C 3209	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	f5
C 3211	CHIP CAP.	27pF	50V	CH	GRM1882C1H270JA01D	K22174221		1-	A	G2
C 3212	CHIP TA.CAP.	0.47uF	25V		TEESVA1E474M8R	K78140009		1-	A	C3
C 3213	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	G6
C 3214	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	G6
C 3215	CHIP CAP.	270pF	50V	CH	GRM1882C1H271JA01D	K22174251		1-	B	c1
C 3216	CHIP CAP.	56pF	50V	CH	GRM1882C1H560JA01D	K22174229		1-	A	E3
C 3217	CHIP CAP.	470pF	50V	CH	GRM1882C1H471JA01D	K22174249		1-	A	F2
C 3218	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	b2
C 3218	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	b2
C 3219	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	a2
C 3219	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	a2
C 3220	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	a2
C 3220	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	a2
C 3221	CHIP CAP.	6pF	50V	CH	GRM1882C1H6R0DZ01D	K22174207		1-	A	G6
C 3222	CHIP CAP.	100pF	50V	CH	GRM1882C1H101JA01D	K22174235		1-	A	G2
C 3223	CHIP TA.CAP.	1uF	35V		TEESVA1V105M8R	K78160032		1-	A	E3
C 3224	CHIP CAP.	6pF	50V	CH	GRM1882C1H6R0DZ01D	K22174207		1-	A	G6
C 3225	CHIP CAP.	470pF	50V	CH	GRM1882C1H471JA01D	K22174249		1-	A	F2

IF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 3226	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	b2
C 3226	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	b2
C 3227	CHIP CAP.	10pF	50V	CH	GRM1882C1H100RZ01D	K22174248		1-	A	G6
C 3228	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	F2
C 3228	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	F2
C 3229	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	G2
C 3229	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	G2
C 3230	CHIP CAP.	0.022uF	25V	B	GRM39B223K25PT	K22144807		1-	A	E3
C 3231	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	f2
C 3231	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	f2
C 3233	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	b2
C 3233	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	b2
C 3234	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	G2
C 3234	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	G2
C 3235	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	b2
C 3235	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	b2
C 3236	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	e2
C 3237	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	f3
C 3238	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	C6
C 3238	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	C6
C 3239	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	f3
C 3240	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	c2
C 3240	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	c2
C 3241	CHIP CAP.	150pF	50V	CH	GRM1882C1H151JA01D	K22174239		1-	A	G2
C 3242	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	f2
C 3242	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	f2
C 3243	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D5
C 3244	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	c2
C 3244	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	c2
C 3245	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	f2
C 3245	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	f2
C 3246	CHIP CAP.	18pF	50V	CH	GRM1882C1H180JA01D	K22174217		1-	A	D5
C 3247	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	E4
C 3247	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	E4
C 3248	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	F1
C 3248	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	F1
C 3249	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	f6
C 3249	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	f6
C 3250	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	g6
C 3250	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	g6
C 3251	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	g6
C 3251	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	g6
C 3252	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	e5
C 3253	CHIP CAP.	0.0056uF	50V	B	GRM188B11H562KA01D	K22174818		1-	B	f3
C 3254	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	f6
C 3254	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	f6
C 3255	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	C2
C 3255	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	C2
C 3256	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	g6
C 3256	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	g6
C 3257	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	g6
C 3257	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	g6
C 3258	CHIP CAP.	0.01uF	25V	B	GRM39B103M25PT	K22144802		1-	B	c2
C 3259	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	c2
C 3259	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	c2
C 3260	CHIP CAP.	33pF	50V	CH	GRM1882C1H330JA01D	K22174223		1-	B	f6
C 3262	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	f2
C 3262	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	f2
C 3263	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D5
C 3264	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	F2
C 3264	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	F2
C 3265	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		1-	B	c2
C 3266	CHIP CAP.	39pF	50V	CH	GRM1882C1H390JA01D	K22174225		1-	B	f6
C 3267	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	F2
C 3270	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	e3

IF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 3273	CHIP CAP.	0.0033uF	50V	B	GRM188B11H332KA01D	K22174815		1-	B	e3
C 3274	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	e6
C 3275	CHIP CAP.	0.0022uF	50V	B	GRM188B11H222KA01D	K22174813		1-	B	d3
C 3276	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	d2
C 3277	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	E2
C 3277	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	E2
C 3278	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	f2
C 3278	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	f2
C 3279	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	f6
C 3279	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	f6
C 3280	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	g6
C 3280	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	g6
C 3281	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	g6
C 3281	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	g6
C 3282	CHIP CAP.	470pF	50V	CH	GRM1882C1H471JA01D	K22174249		1-	B	e6
C 3283	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	f6
C 3283	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	f6
C 3284	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	D3
C 3284	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	D3
C 3285	CHIP CAP.	470pF	50V	CH	GRM1882C1H471JA01D	K22174249		1-	B	e6
C 3286	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	C6
C 3286	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	C6
C 3287	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	D6
C 3287	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	D6
C 3288	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	f6
C 3288	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	f6
C 3289	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D7
C 3290	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	C6
C 3290	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	C6
C 3292	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	b7
C 3293	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	f6
C 3293	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	f6
C 3294	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	e6
C 3294	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	e6
C 3295	CHIP CAP.	150pF	50V	CH	GRM1882C1H151JA01D	K22174239		1-	A	C6
C 3296	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	E3
C 3297	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D7
C 3298	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	c4
C 3299	CHIP CAP.	0.047uF	16V	B	GRM39B473K16PT	K22124804		1-	A	F2
C 3300	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	D7
C 3301	CHIP CAP.	47pF	50V	CH	GRM1882C1H470JA01D	K22174227		1-	B	f1
C 3302	CHIP CAP.	0.0056uF	50V	B	GRM188B11H562KA01D	K22174818		1-	A	D7
C 3303	CHIP CAP.	0.047uF	16V	B	GRM39B473K16PT	K22124804		1-	A	D6
C 3304	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	A5
C 3304	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	A5
C 3305	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	B7
C 3305	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	B7
C 3306	CHIP CAP.	0.082uF	16V	B	GRM188B11C823KA01D	K22124809		1-	B	e6
C 3307	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	c4
C 3308	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	D6
C 3309	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	c4
C 3310	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	B6
C 3310	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	B6
C 3311	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	B7
C 3311	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	B7
C 3312	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	e6
C 3312	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	e6
C 3314	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	D6
C 3314	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	D6
C 3315	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	C7
C 3315	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	C7
C 3316	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	D6
C 3316	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	D6
C 3317	CHIP CAP.	0.47uF	25V	B	GRM40B474K25PT	K22140824		1-	B	e6
C 3317	CHIP CAP.	0.47uF	16V	F	ECJ1VF1C474Z	K22125001		3-	B	e6

IF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 3317	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		24-	B	e6
C 3318	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	B6
C 3318	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	B6
C 3319	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-		
C 3319	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-32		
C 3320	AL.ELECTRO.CAP.	47uF	16V		ECEV1CA470WR	K48120013		1-	A	G7
C 3320	AL.ELECTRO.CAP.	47uF	16V		EEE1CA470WR	K48120025		78-	A	G7
C 3321	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	B6
C 3321	CHIP CAP.	0.1uF	25V	F	GRM188F11E104ZA01D	K22145001		3-	A	B6
C 3322	AL.ELECTRO.CAP.	10uF	16V		ECEV1CS100SR	K48120001		1-	A	B7
C 3322	AL.ELECTRO.CAP.	10uF	16V		EEE1CS100SR	K48120023		77-	A	B7
C 3323	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	b7
C 3323	CHIP CAP.	0.1uF	25V	F	GRM188F11E104ZA01D	K22145001		3-	B	b7
C 3324	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	g7
C 3324	CHIP CAP.	0.1uF	25V	F	GRM188F11E104ZA01D	K22145001		3-	B	g7
C 3330	CHIP CAP.	3pF	50V	CJ	GRM1883C1H3R0CZ01D	K22174204		1-	B	g5
C 3335	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	c2
C 3337	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	h4
C 3338	CHIP CAP.	22pF	50V	CH	GRM1882C1H220JA01D	K22174219		1-	B	g4
C 3339	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		1-	B	g4
C 3341	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	h4
C 3342	CHIP CAP.	100pF	50V	CH	GRM1882C1H101JA01D	K22174235		1-	A	G2
C 3343	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	A	F4
C 3344	CHIP CAP.	100pF	50V	CH	GRM2162C1H101JA01D	K22170235		1-	B	c5
C 3344	CHIP CAP.	100pF	50V	CH	GRM1882C1H101JA01D	K22174235		3-	B	c5
C 3345	CHIP CAP.	22pF	50V	CH	GRM1882C1H220JA01D	K22174219		1-	B	d3
C 3348	AL.ELECTRO.CAP.	10uF	16V		RC2-16V100MD1#	K40129012		1-	A	F7
C 3348	AL.ELECTRO.CAP.	10uF	16V		RV2-16V100MB55U-R	K48120014		3-	A	F7
C 3349	CHIP CAP.	120pF	50V	CH	GRM1882C1H121JA01D	K22174237	W/ CE	6-	B	h3
C 3350	CHIP CAP.	120pF	50V	CH	GRM1882C1H121JA01D	K22174237	W/ CE	6-	A	A3
CD3001	CERAMIC DISC				CDBLA455KCAY07-B0	H7900180		1-	A	F2
CD3002	CERAMIC DISC				CDBLA455KCAY07-B0	H7900180		1-	A	C6
CF3001	CERAMIC FILTER				SFELA10M7HA00-B0	H3900375		1-	A	E4
CF3002	CERAMIC FILTER				SFELA10M7HA00-B0	H3900375		1-	A	E4
CF3003	CERAMIC FILTER				CFWLA455KEFA-B0	H3900505		1-	A	G2
CF3004	CERAMIC FILTER				CFWLA455KHFA-B0	H3900508		1-	A	G2
CF3005	CERAMIC FILTER				CFM455J1	H3900041		1-	A	H2
CF3006	CERAMIC FILTER				CFWLA455KEFA-B0	H3900505		1-	A	C6
CF3007	CERAMIC FILTER				CFWLA455KHFA-B0	H3900508		1-	A	B6
CF3008	CERAMIC FILTER				CFWLA455KJFA-B0	H3900532		1-	A	B6
CO3001	CERAMIC OSC	453.5kHz			CSB453.5A2	H7900090		1-	A	E1
CO3002	CERAMIC OSC	456.5kHz			CSB456.5A2	H7900100		1-	A	E2
CV3001	HELICAL RESONATOR	614MHz			HF-H7-AT 614M R12-T355X	L4020159		1-	A	B4
CV3002	HELICAL RESONATOR	614MHz			HF-H7-AT 614M R12-T355X	L4020159		1-	A	C4
D 3002	DIODE				HVU359 TRF-E	G2070452		1-	B	a5
D 3003	DIODE				HVU359 TRF-E	G2070452		1-	B	a5
D 3004	VARIATOR				MA28T-A(TX)	G9090061		1-	B	b5
D 3005	DIODE				HVU355 TRF-E	G2070410		1-	B	g5
D 3007	DIODE				DA204K T146	G2070388		1-	B	a4
D 3008	DIODE				1SS355 TE-17	G2070470		1-	B	c5
D 3009	DIODE				HVU355 TRF-E	G2070410		1-	A	F6
D 3010	DIODE				1SS355 TE-17	G2070470		1-	B	a3
D 3011	DIODE				HVU355 TRF-E	G2070410		1-	B	f4
D 3012	DIODE				DAN202K T146	G2070182		1-	B	c4
D 3013	DIODE				1SS355 TE-17	G2070470		1-	B	b3
D 3014	DIODE				DA204K T146	G2070388		1-	B	b3
D 3015	DIODE				DAN202K T146	G2070182		1-	A	E2
D 3016	DIODE				DA204K T146	G2070388		1-	A	F3
D 3017	DIODE				DAN202K T146	G2070182		1-	A	D2
D 3018	DIODE				1SS355 TE-17	G2070470		1-	B	b2
D 3019	DIODE				1SS355 TE-17	G2070470		1-	B	b2
D 3020	DIODE				1SS355 TE-17	G2070470		1-	B	a3
D 3021	DIODE				DAN202K T146	G2070182		1-	A	E2
D 3022	DIODE				1SS355 TE-17	G2070470		1-	B	b2
D 3023	DIODE				1SS355 TE-17	G2070470		1-	B	a2

IF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
D 3024	DIODE				1SS355 TE-17	G2070470		1-	B	a1
D 3025	DIODE				1SS355 TE-17	G2070470		1-	B	f6
D 3026	DIODE				1SS355 TE-17	G2070470		1-	B	g6
D 3027	DIODE				1SS355 TE-17	G2070470		1-	B	g6
D 3028	DIODE				DA204K T146	G2070388		1-	B	f2
D 3029	DIODE				DA204K T146	G2070388		1-	B	e5
D 3030	DIODE				DAN202K T146	G2070182		1-	B	c2
D 3031	DIODE				1SS355 TE-17	G2070470		1-	B	f6
D 3032	DIODE				1SS355 TE-17	G2070470		1-	B	g6
D 3033	DIODE				1SS355 TE-17	G2070470		1-	B	g6
D 3034	DIODE				1SS355 TE-17	G2070470		1-	B	e2
D 3035	DIODE				1SS355 TE-17	G2070470		1-	B	e2
D 3036	DIODE				1SS355 TE-17	G2070470		1-	B	e1
D 3037	DIODE				1SS355 TE-17	G2070470		1-	B	e2
D 3038	DIODE				1SS355 TE-17	G2070470		1-	B	e2
J 3001	CONNECTOR				TMP-J01X-A2	P1090255		1-	A	D3
J 3001	CONNECTOR				TMP-S01X-C1	P1091254		71-	A	D3
J 3002	CONNECTOR				TMP-J01X-A2	P1090255		1-	A	A4
J 3002	CONNECTOR				TMP-S01X-C1	P1091254		71-	A	A4
J 3003	CONNECTOR				JPJ2545-01-510	P1090633		1-	A	D1
J 3004	CONNECTOR				TMP-J01X-A2	P1090255		1-	A	E4
J 3004	CONNECTOR				TMP-S01X-C1	P1091254		71-	A	E4
J 3005	CONNECTOR				TMP-J01X-A2	P1090255		1-	A	G7
J 3005	CONNECTOR				TMP-S01X-C1	P1091254		71-	A	G7
J 3006	CONNECTOR				SC25-02WS	P0090621		1-	A	B1
J 3007	CONNECTOR				SG8035#01	P1090350		1-	A	B1
J 3008	CONNECTOR				SC25-02WS	P0090621		1-	A	B1
J 3009	CONNECTOR				20FMZ-BT(LF)(SN)	P1090903		1-	A	D8
J 3010	CONNECTOR				JPJ2545-01-510	P1090633		1-	A	E1
J 3011	CONNECTOR				SG8035#01	P1090350		1-	A	C1
J 3012	CONNECTOR				1210-062-09P-AA	P0091208		1-	A	G1
J 3013	CONNECTOR				20FMZ-BT(LF)(SN)	P1090903		1-	A	F8
JP3001	WIRE ASSY				GRA 110 TMP(A5)/TMP(A5)	T9318154		1-	A	F4
JP3003	WIRE ASSY				GRN 35 2/2	T50503500		1-		
JP3004	WIRE ASSY				GRN 155 2/2	T50515500		1-		
JP3005	WIRE ASSY				GRN 155 2/2	T50515500		1-		
L 3001	M.RFC	0.039uH			HK1608 39NJ-T	L1690523		1-	B	f4
L 3002	M.RFC	0.033uH			HK1608 33NJ-T	L1690522		1-	B	f4
L 3003	M.RFC	0.033uH			HK1608 33NJ-T	L1690522		1-	B	e4
L 3005	M.RFC	0.012uH			HK1608 12NJ-T	L1690517		1-	B	g5
L 3006	M.RFC	0.33uH			LK2125 R33K-T	L1690313		1-	B	f5
L 3007	M.RFC	0.82uH			LK2125 R82K-T	L1690318		61-	B	d4
L 3008	M.RFC	0.012uH			HK1608 12NJ-T	L1690517		1-	B	g5
L 3009	M.RFC	0.47uH			LK2125 R47K-T	L1690315		1-	B	e4
L 3010	M.RFC	0.012uH			HK1608 12NJ-T	L1690517		1-	B	g5
L 3011	M.RFC	0.022uH			HK1608 22NJ-T	L1690520		1-	B	e4
L 3011	M.RFC	0.01uH			HK1608 10NJ-T	L1690516		61-	B	e4
L 3012	CHIP COIL	1mH			LQH43MN102K03L	L1690108		1-	A	H3
L 3013	COIL	0.017uH			AS030616-17NK	L0022678		1-	A	F6
L 3014	M.RFC	0.012uH			HK1608 12NJ-T	L1690517		1-	B	g5
L 3015	M.RFC	0.27uH			ELJ-NCR27JF	L1690652		1-	B	c5
L 3016	M.RFC	0.012uH			HK1608 12NJ-T	L1690517		1-	B	f5
L 3017	M.RFC	0.022uH			HK1608 22NJ-T	L1690520		1-	B	c1
L 3018	M.RFC	0.47uH			LK1608 R47K-T	L1690414		1-	B	f6
L 3019	M.RFC	0.27uH			ELJ-NCR27JF	L1690652		1-	B	d5
L 3020	M.RFC	0.33uH			ELJ-NCR33JF	L1690653		1-	A	F6
L 3021	M.RFC	0.015uH			HK1608 15NJ-T	L1690518		1-	A	E5
L 3022	M.RFC	2.7uH			LK2125 2R7K-T	L1690324		1-	A	F3
L 3023	M.RFC	0.015uH			HK1608 15NJ-T	L1690518		1-	A	E5
L 3024	M.RFC	0.68uH			LK1608 R68K-T	L1690416		1-	B	e4
L 3025	M.RFC	0.012uH			HK1608 12NJ-T	L1690517		1-	A	E5
L 3026	M.RFC	0.012uH			HK1608 12NJ-T	L1690517		1-	A	E6
L 3027	M.RFC	0.018uH			HK1608 18NJ-T	L1690519		1-	A	G6
L 3028	M.RFC	0.018uH			HK1608 18NJ-T	L1690519		1-	A	E6
L 3029	M.RFC	22uH			LK2125 220M-T	L1690335		1-	A	E3

IF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
L 3030	M.RFC	0.015uH			HK1608 15NJ-T	L1690518		1-	A	G6
L 3031	M.RFC	0.015uH			HK1608 15NJ-T	L1690518		1-	A	G6
L 3032	M.RFC	0.68uH			LK1608 R68K-T	L1690416		1-	A	D5
L 3037	M.RFC	0.033uH			HK1608 33NJ-T	L1690522		1-	B	g4
L 3038	M.RFC	0.82uH			LK1608 R82K-T	L1690417		1-	B	d3
L 3040	M.RFC	0.82uH			LK1608 R82K-T	L1690417		1-	B	f4
Q 3001	IC				M5223AFP 600C	G1092955		1-	A	E7
Q 3002	IC				M5223AFP 600C	G1092955		1-	A	D7
Q 3003	IC				TC4W66F(TE12L.F)	G1091493		1-	A	C7
Q 3004	IC				NJM2902M-TE1	G1093092		1-	B	e3
Q 3005	IC				BU4066BCF-E2	G1092593		1-	A	D2
Q 3006	IC				M5223AFP 600C	G1092955		1-	B	d3
Q 3007	TRANSISTOR				2SC3120(TE85R.F)	G3331207		1-	B	h4
Q 3008	TRANSISTOR				2SC1623-T2BL6	G3316237F		1-	B	g2
Q 3009	FET				3SK228XR-TR	G4802287		1-	B	f4
Q 3009	FET				SGM2016AM-T7	G4070012		61-	B	f4
Q 3010	TRANSISTOR				2SB1134R	G3211340R		1-	A	A2
Q 3011	TRANSISTOR				DTC114EK T146	G3070002		1-	B	b7
Q 3012	TRANSISTOR				2SC4116GR(TE85R.F)	G3341167G		1-	A	G7
Q 3013	IC				LA4425A	G1092241		1-	A	A7
Q 3014	TRANSISTOR				FMW1 T98	G3070009		1-	B	c4
Q 3015	IC				KIA7808API	G1093164		1-	A	A2
Q 3016	TRANSISTOR				2SC3120(TE85R.F)	G3331207		1-	B	g5
Q 3017	FET				3SK228XR-TR	G4802287		1-	B	d4
Q 3017	FET				SGM2016AM-T7	G4070012		61-	B	d4
Q 3018	IC				MB15A02PFV1-G-BND-EFE1	G1092541		1-	A	G7
Q 3019	TRANSISTOR				2SC4116GR(TE85R.F)	G3341167G		1-	B	b5
Q 3020	TRANSISTOR				FMC3 T148	G3070046		1-	A	C2
Q 3021	TRANSISTOR				FMC3 T148	G3070046		1-	B	g2
Q 3022	TRANSISTOR				FMC3 T148	G3070046		1-	A	B2
Q 3023	TRANSISTOR				FMC3 T148	G3070046		1-	A	B2
Q 3024	TRANSISTOR				FMW1 T98	G3070009		1-	B	b4
Q 3025	TRANSISTOR				2SC2620QBTR	G3326207B		1-	B	d4
Q 3026	TRANSISTOR				2SC2620QBTR	G3326207B		1-	B	d1
Q 3027	TRANSISTOR				DTC114EK T146	G3070002		1-	A	C2
Q 3028	IC				BU4094BCFV-E1	G1092128		1-	A	B3
Q 3028	IC				BU4094BCFV-E2	G1093527		24-	A	B3
Q 3030	TRANSISTOR				2SC4116GR(TE85R.F)	G3341167G		1-	B	c4
Q 3031	TRANSISTOR				DTC114EK T146	G3070002		1-	B	e2
Q 3032	FET				3SK228XR-TR	G4802287		1-	B	f5
Q 3032	FET				SGM2016AM-T7	G4070012		61-	B	f5
Q 3033	TRANSISTOR				2SC2620QBTR	G3326207B		1-	B	c1
Q 3034	TRANSISTOR				FMC3 T148	G3070046		1-	B	f3
Q 3035	TRANSISTOR				FMC3 T148	G3070046		1-	B	f3
Q 3036	TRANSISTOR				DTC114EK T146	G3070002		1-	B	b4
Q 3037	FET				3SK228XR-TR	G4802287		1-	B	g5
Q 3037	FET				SGM2016AM-T7	G4070012		61-	B	g5
Q 3038	TRANSISTOR				DTC114EK T146	G3070002		1-	A	B2
Q 3039	IC				SN16913P	G1090012		1-	A	F2
Q 3040	TRANSISTOR				2SC1623-T2BL6	G3316237F		1-	B	c2
Q 3041	TRANSISTOR				2SC2620QBTR	G3326207B		1-	B	c4
Q 3042	TRANSISTOR				2SC1623-T2BL6	G3316237F		1-	B	a3
Q 3043	FET				3SK228XR-TR	G4802287		1-	B	e4
Q 3043	FET				SGM2016AM-T7	G4070012		61-	B	e4
Q 3044	TRANSISTOR				FMC3 T148	G3070046		1-	B	g2
Q 3045	TRANSISTOR				FMC3 T148	G3070046		1-	B	g2
Q 3046	TRANSISTOR				2SC2620QBTR	G3326207B		1-	B	d2
Q 3047	TRANSISTOR				DTB123YK T146	G3070156		1-	A	B2
Q 3048	TRANSISTOR				2SC1623-T2BL6	G3316237F		1-	B	a3
Q 3049	TRANSISTOR				2SC3356-T2B R24	G3333567D		1-	A	F6
Q 3050	TRANSISTOR				DTB123YK T146	G3070156		1-	A	B2
Q 3051	TRANSISTOR				2SC2620QBTR	G3326207B		1-	B	c3
Q 3052	TRANSISTOR				2SC3356-T2B R24	G3333567D		1-	A	F6
Q 3053	TRANSISTOR				IMH5 T108	G3070027		1-	A	B2
Q 3054	TRANSISTOR				2SC1623-T2BL6	G3316237F		1-	A	C2

IF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
Q 3055	FET				3SK228XR-TR	G4802287		1-	B	f5
Q 3055	FET				SGM2016AM-T7	G4070012		61-	B	f5
Q 3056	IC				LA1145M-TE-L	G1093007		1-	A	E3
Q 3057	TRANSISTOR				2SA1586Y(TE85R.F)	G3115867Y		1-	B	b7
Q 3058	IC				NJM567M(TE2)	G1093088		1-	A	C2
Q 3059	TRANSISTOR				2SC3356-T2B R24	G3333567D		1-	A	G6
Q 3060	TRANSISTOR				2SC3356-T2B R24	G3333567D		1-	A	E6
Q 3061	IC				TK10931VTL-G	G1093013		1-	A	F2
Q 3062	TRANSISTOR				2SC2620QBTR	G3326207B		1-	A	D5
Q 3063	TRANSISTOR				2SC1623-T2BL6	G3316237F		1-	B	f2
Q 3064	TRANSISTOR				DTC114EK T146	G3070002		1-	B	f3
Q 3065	TRANSISTOR				DTC114EK T146	G3070002		1-	B	c2
Q 3066	TRANSISTOR				FMC3 T148	G3070046		1-	B	f3
Q 3067	TRANSISTOR				2SC1623-T2BL6	G3316237F		1-	B	f2
Q 3068	TRANSISTOR				2SC4116GR(TE85R.F)	G3341167G		1-	B	e6
Q 3069	IC				TK10931VTL-G	G1093013		1-	A	D6
Q 3070	TRANSISTOR				FMC3 T148	G3070046		1-	A	B6
Q 3071	TRANSISTOR				FMC3 T148	G3070046		1-	A	B6
Q 3072	TRANSISTOR				FMC3 T148	G3070046		1-	A	A6
Q 3073	TRANSISTOR				DTC114EK T146	G3070002		1-	A	G7
Q 3075	TRANSISTOR				2SC2620QBTR	G3326207B		1-	B	c4
Q 3076	IC				KIA7808API	G1093164		1-	A	H7
Q 3077	IC				NJM78L05UA-TE1	G1091325		1-	A	B7
Q 3078	IC				NJM78L09UA-TE2	G1091305		1-	A	B6
Q 3080	TRANSISTOR				DTC114EK T146	G3070002		1-	B	c2
Q 3081	TRANSISTOR				BA1A4P	G3090079		1-	A	C5
Q 3081	TRANSISTOR				DTC114YK T146	G3070071		3-	A	C5
Q 3082	TRANSISTOR				BA1A4P	G3090079		1-	A	C5
Q 3082	TRANSISTOR				DTC114YK T146	G3070071		3-	A	C5
R 3001	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	B	h4
R 3002	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	B	h4
R 3003	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	h4
R 3004	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	h4
R 3005	CHIP RES.	4.7	1W	5%	RMC1 4R7JTE	J24305479		1-	B	g1
R 3006	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	g2
R 3007	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	g2
R 3008	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	B	f3
R 3009	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	f4
R 3010	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	g2
R 3011	CHIP RES.	1k	1/4W	5%	RMC1/4 102JATP	J24245102		1-	B	g2
R 3012	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	a5
R 3013	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	f3
R 3014	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	f4
R 3015	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	f4
R 3015	CHIP RES.	56	1/16W	5%	RMC1/16 560JATP	J24185560		61-	B	f4
R 3016	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	F7
R 3016	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		24-	A	F7
R 3017	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	B	a5
R 3017	CHIP RES.	18k	1/16W	5%	RMC1/16 183JATP	J24185183		92-	B	a5
R 3018	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	a5
R 3019	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	B7
R 3020	CHIP RES.	8.2k	1/16W	5%	RMC1/16 822JATP	J24185822		1-	A	F7
R 3020	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		24-	A	F7
R 3021	CHIP RES.	3.9k	1/16W	5%	RMC1/16 392JATP	J24185392		1-	A	G7
R 3022	CHIP RES.	1.5k	1/16W	5%	RMC1/16 152JATP	J24185152		1-	A	G7
R 3023	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	b7
R 3024	CHIP RES.	2.2	1/2W	5%	RMC1/2 2R2JCTP	J24275229		1-	B	g7
R 3025	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	A	G7
R 3026	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	F7
R 3027	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	c4
R 3028	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	A	G7
R 3029	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	b2
R 3030	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1-	B	b5
R 3031	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	F7
R 3032	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	F7

IF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 3032	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		24-	A	F7
R 3033	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	b3
R 3034	CHIP RES.	2.2k	1/16W	5%	RMC1/16 222JATP	J24185222		1-	B	b5
R 3035	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	g7
R 3036	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1-	B	h5
R 3037	CHIP RES.	1.5k	1/16W	5%	RMC1/16 152JATP	J24185152		1-	B	h4
R 3038	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	b4
R 3039	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	b3
R 3040	CHIP RES.	1.5k	1/16W	5%	RMC1/16 152JATP	J24185152		1-	B	g7
R 3040	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		3-	B	g7
R 3041	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	d4
R 3042	CHIP RES.	68	1/16W	5%	RMC1/16 680JATP	J24185680		1-	B	g4
R 3044	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	A	F7
R 3047	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1-	B	a5
R 3048	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	B	g5
R 3049	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	h5
R 3050	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	d4
R 3051	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	d3
R 3052	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	B	d4
R 3053	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	B	d4
R 3054	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	b5
R 3055	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	B	b5
R 3056	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	e7
R 3057	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	e8
R 3058	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	e8
R 3059	CHIP RES.	56	1/16W	5%	RMC1/16 560JATP	J24185560		1-	B	b4
R 3060	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	E7
R 3061	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	b4
R 3062	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	b4
R 3063	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	d1
R 3064	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	d4
R 3064	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		3-	B	d4
R 3066	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	b4
R 3067	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	b4
R 3068	CHIP RES.	2.2k	1/16W	5%	RMC1/16 222JATP	J24185222		1-	B	d1
R 3069	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	A	D6
R 3070	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	B	d4
R 3071	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	d4
R 3072	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	d2
R 3073	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	g5
R 3074	CHIP RES.	390k	1/16W	5%	RMC1/16 394JATP	J24185394		1-	B	d2
R 3075	CHIP RES.	56	1/16W	5%	RMC1/16 560JATP	J24185560		1-	B	g5
R 3076	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	c4
R 3077	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	c5
R 3078	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	c1
R 3079	CHIP RES.	390	1/16W	5%	RMC1/16 391JATP	J24185391		1-	B	c4
R 3081	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	c5
R 3082	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	c4
R 3084	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	c5
R 3085	CHIP RES.	390	1/16W	5%	RMC1/16 391JATP	J24185391		1-	B	c1
R 3086	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	G7
R 3086	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		24-	A	G7
R 3087	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	B	g5
R 3088	CHIP RES.	12k	1/16W	5%	RMC1/16 123JATP	J24185123		1-	B	d4
R 3089	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	F6
R 3090	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	c4
R 3091	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	c5
R 3092	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	g5
R 3093	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	B	g5
R 3094	CHIP RES.	220	1/16W	5%	RMC1/16 221JATP	J24185221		1-	B	g5
R 3094	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		61-	B	g5
R 3095	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	c4
R 3096	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	B	a3
R 3097	CHIP RES.	390k	1/16W	5%	RMC1/16 394JATP	J24185394		1-	B	d2
R 3098	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	d2

IF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 3099	CHIP RES.	33k	1/16W	5%	RMC1/16 333JATP	J24185333		1-	B	a3
R 3100	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	c4
R 3101	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	B	c3
R 3102	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1-	A	G7
R 3103	CHIP RES.	27k	1/16W	5%	RMC1/16 273JATP	J24185273		1-	A	F6
R 3104	CHIP RES.	27k	1/16W	5%	RMC1/16 273JATP	J24185273		1-	A	F6
R 3105	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	b3
R 3106	CHIP RES.	2.2k	1/16W	5%	RMC1/16 222JATP	J24185222		1-	B	d2
R 3107	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	f5
R 3108	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	b3
R 3109	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	d2
R 3110	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	A	F6
R 3111	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	F6
R 3112	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	B2
R 3113	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	c3
R 3114	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	a3
R 3115	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	b3
R 3116	CHIP RES.	390	1/16W	5%	RMC1/16 391JATP	J24185391		1-	A	F4
R 3118	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	B	c3
R 3119	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	F6
R 3120	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	A	E2
R 3121	CHIP RES.	2.2k	1/16W	5%	RMC1/16 222JATP	J24185222		1-	A	E2
R 3122	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	c3
R 3123	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	F3
R 3124	CHIP RES.	3.9k	1/16W	5%	RMC1/16 392JATP	J24185392		1-	B	c3
R 3124	CHIP RES.	3.9k	1/16W	5%	RMC1/16 392JATP	J24185392		3-	B	c3
R 3125	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	A	F6
R 3126	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	A	F6
R 3127	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	b7
R 3128	CHIP RES.	2.7k	1/16W	5%	RMC1/16 272JATP	J24185272		1-	B	c3
R 3129	CHIP RES.	2.7k	1/16W	5%	RMC1/16 272JATP	J24185272		1-	B	d2
R 3130	CHIP RES.	27k	1/16W	5%	RMC1/16 273JATP	J24185273		1-	A	C2
R 3131	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	f4
R 3132	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	B	d6
R 3133	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	d5
R 3134	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	a3
R 3135	CHIP RES.	270	1/16W	5%	RMC1/16 271JATP	J24185271		1-	A	F6
R 3136	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	A	C2
R 3137	CHIP RES.	18	1/16W	5%	RMC1/16 180JATP	J24185180		1-	A	F6
R 3138	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	E3
R 3139	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	f5
R 3140	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1-	A	E3
R 3141	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	a3
R 3142	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	A	C2
R 3143	CHIP RES.	270	1/16W	5%	RMC1/16 271JATP	J24185271		1-	A	F6
R 3146	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	A	E3
R 3147	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	A	E6
R 3148	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	A	G6
R 3149	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	b7
R 3150	CHIP RES.	68	1/16W	5%	RMC1/16 680JATP	J24185680		1-	B	e4
R 3151	CHIP RES.	1.5k	1/16W	5%	RMC1/16 152JATP	J24185152		1-	B	e4
R 3152	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	B	e5
R 3153	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	f5
R 3154	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	A	E3
R 3154	CHIP RES.	2.2k	1/16W	5%	RMC1/16 222JATP	J24185222		65-	A	E3
R 3155	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	A	G6
R 3156	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	E3
R 3157	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	a3
R 3158	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	A	E6
R 3160	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	A	C2
R 3161	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	A	G6
R 3162	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	f5
R 3163	CHIP RES.	56k	1/16W	5%	RMC1/16 563JATP	J24185563		1-	A	E3
R 3164	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	A	E6
R 3165	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	E3

IF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 3166	CHIP RES.	68	1/16W	5%	RMC1/16 680JATP	J24185680		1-	B	f5
R 3167	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	E3
R 3168	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	E3
R 3170	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	E6
R 3171	CHIP RES.	2.2k	1/16W	5%	RMC1/16 222JATP	J24185222		1-	B	b2
R 3172	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	B	b2
R 3173	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	B	a2
R 3174	CHIP RES.	560	1/16W	5%	RMC1/16 561JATP	J24185561		1-	A	C3
R 3175	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	B	f5
R 3176	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	b2
R 3177	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	a2
R 3178	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	a2
R 3179	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	G6
R 3181	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	b2
R 3182	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	b2
R 3183	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	a2
R 3184	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	C3
R 3185	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	A	G2
R 3186	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	C3
R 3187	CHIP RES.	12k	1/16W	5%	RMC1/16 123JATP	J24185123		1-	B	e5
R 3188	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	A	D5
R 3189	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	A	G6
R 3190	CHIP RES.	270k	1/16W	5%	RMC1/16 274JATP	J24185274		1-	A	F2
R 3191	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	b2
R 3192	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	a2
R 3193	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	a2
R 3194	CHIP RES.	6.8k	1/16W	5%	RMC1/16 682JATP	J24185682		1-	A	C3
R 3195	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	E3
R 3196	CHIP RES.	6.8k	1/16W	5%	RMC1/16 682JATP	J24185682		1-	A	E3
R 3197	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1-	A	D5
R 3198	CHIP RES.	6.8k	1/16W	5%	RMC1/16 682JATP	J24185682		1-	A	D5
R 3199	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	a2
R 3200	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	F2
R 3201	CHIP RES.	68	1/16W	5%	RMC1/16 680JATP	J24185680		1-	A	D5
R 3202	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	e5
R 3203	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	A	D5
R 3204	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	F2
R 3205	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	B	f2
R 3206	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	c2
R 3207	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	f6
R 3208	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	e3
R 3209	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	F2
R 3210	CHIP RES.	8.2k	1/16W	5%	RMC1/16 822JATP	J24185822		1-	A	D5
R 3211	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	e2
R 3212	CHIP RES.	33k	1/16W	5%	RMC1/16 333JATP	J24185333		1-	B	f3
R 3213	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	A	F2
R 3214	CHIP RES.	330k	1/16W	5%	RMC1/16 334JATP	J24185334		1-	B	e2
R 3215	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	B	f3
R 3216	CHIP RES.	2.2k	1/16W	5%	RMC1/16 222JATP	J24185222		1-	B	f6
R 3217	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	B	g6
R 3218	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	B	g6
R 3219	CHIP RES.	2.7k	1/16W	5%	RMC1/16 272JATP	J24185272		1-	A	F2
R 3220	CHIP RES.	12k	1/16W	5%	RMC1/16 123JATP	J24185123		1-	B	c2
R 3221	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	c2
R 3222	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	f6
R 3223	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	g6
R 3224	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	g6
R 3226	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	B	c2
R 3227	CHIP RES.	33k	1/16W	5%	RMC1/16 333JATP	J24185333		1-	B	f2
R 3228	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	c2
R 3229	CHIP RES.	18k	1/16W	5%	RMC1/16 183JATP	J24185183		1-	B	c2
R 3230	CHIP RES.	8.2k	1/16W	5%	RMC1/16 822JATP	J24185822		1-	B	c2
R 3231	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	A	B2
R 3232	CHIP RES.	39k	1/16W	5%	RMC1/16 393JATP	J24185393		1-	B	c2
R 3233	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	B	f2

IF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 3234	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	f3
R 3235	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	f6
R 3236	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	g6
R 3237	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	g6
R 3238	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	B	e3
R 3239	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	f6
R 3240	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	E2
R 3242	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	f6
R 3243	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	B	d3
R 3244	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	A	E3
R 3245	CHIP RES.	33k	1/16W	5%	RMC1/16 333JATP	J24185333		1-	B	e2
R 3247	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1-	B	e3
R 3248	CHIP RES.	5.6k	1/16W	5%	RMC1/16 562JATP	J24185562		1-	B	d3
R 3249	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	B	d3
R 3250	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	f2
R 3251	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	e6
R 3253	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		1-	B	d2
R 3255	CHIP RES.	1M	1/16W	5%	RMC1/16 105JATP	J24185105		1-	B	e3
R 3256	CHIP RES.	3.9k	1/16W	5%	RMC1/16 392JATP	J24185392		1-	B	f1
R 3257	CHIP RES.	270k	1/16W	5%	RMC1/16 274JATP	J24185274		1-	B	e6
R 3258	CHIP RES.	1M	1/16W	5%	RMC1/16 105JATP	J24185105		1-	B	d3
R 3259	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	f6
R 3260	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	g6
R 3261	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	g6
R 3262	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	A	D7
R 3263	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	e2
R 3264	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	e3
R 3265	CHIP RES.	18k	1/16W	5%	RMC1/16 183JATP	J24185183		1-	A	D6
R 3266	CHIP RES.	330k	1/16W	5%	RMC1/16 334JATP	J24185334		1-	A	D7
R 3267	CHIP RES.	56	1/16W	5%	RMC1/16 560JATP	J24185560		1-	B	e4
R 3270	CHIP RES.	18k	1/16W	5%	RMC1/16 183JATP	J24185183		1-	A	D6
R 3271	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	d3
R 3272	CHIP RES.	6.8k	1/16W	5%	RMC1/16 682JATP	J24185682		1-	B	f6
R 3272	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		33-	B	f6
R 3273	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	e4
R 3274	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	A	D3
R 3275	CHIP RES.	2.7k	1/16W	5%	RMC1/16 272JATP	J24185272		1-	B	e6
R 3276	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	A	D6
R 3277	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	A	D2
R 3278	CHIP RES.	12k	1/16W	5%	RMC1/16 123JATP	J24185123		1-	B	e6
R 3279	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	e6
R 3280	CHIP RES.	33k	1/16W	5%	RMC1/16 333JATP	J24185333		1-	A	C7
R 3281	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	c4
R 3282	CHIP RES.	33k	1/16W	5%	RMC1/16 333JATP	J24185333		1-	A	D7
R 3283	CHIP RES.	6.8k	1/16W	5%	RMC1/16 682JATP	J24185682		1-	B	c2
R 3286	CHIP RES.	68k	1/16W	5%	RMC1/16 683JATP	J24185683		1-	A	C7
R 3286	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		33-	A	C7
R 3287	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	c4
R 3289	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	D6
R 3290	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	A	C7
R 3292	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	C7
R 3295	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	d3
R 3296	CHIP RES.	33k	1/16W	5%	RMC1/16 333JATP	J24185333		1-	B	e6
R 3298	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	A	C7
R 3299	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	A	C7
R 3300	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	A	D7
R 3301	CHIP RES.	100	1/16W	5%	RMC1/16 101JATP	J24185101		1-	B	c4
R 3302	CHIP RES.	5.6k	1/16W	5%	RMC1/16 562JATP	J24185562		1-	A	C7
R 3303	CHIP RES.	10	1W	5%	RMC1 100JTE	J24305100		1-	B	g7
R 3304	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	f1
R 3305	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	B	d4
R 3306	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	B	h4
R 3307	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	B	f5
R 3308	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	c2
R 3308	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		3-	B	c2


IF Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 3309	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	e2
R 3310	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	e6
R 3311	CHIP RES.	330k	1/16W	5%	RMC1/16 334JATP	J24185334		1-	A	F2
R 3312	CHIP RES.	330k	1/16W	5%	RMC1/16 334JATP	J24185334		1-	A	F2
R 3313	CHIP RES.	68k	1/16W	5%	RMC1/16 683JATP	J24185683		1-	B	e6
R 3314	CHIP RES.	330k	1/16W	5%	RMC1/16 334JATP	J24185334		1-	B	f6
R 3319	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	F3
R 3320	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	A	F2
R 3321	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	h4
R 3324	CHIP RES.	10	1/16W	5%	RMC1/16 100JATP	J24185100		1-	B	h4
R 3326	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	f2
R 3327	CARBON FILM RES.	15k	1/6W	5%	RD16TPJ153 15K	J07225153		1-	B	c3
R 3327	CHIP RES.	15k	1/16W	5%	RMC1/16 153JATP	J24185153		3-	B	c3
R 3328	CARBON FILM RES.	100k	1/6W	5%	RD16TPJ104 100K	J07225104		1-	A	D6
R 3328	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		3-	A	D6
R 3329	CARBON FILM RES.	47k	1/6W	5%	RD16TPJ473 47K	J07225473		1-	A	F2
R 3329	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		3-64	A	F2
R 3330	CARBON FILM RES.	4.7k	1/6W	5%	RD16TPJ472 4.7K	J07225472		1-	A	C5
R 3330	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		3-	A	C5
R 3331	CARBON FILM RES.	1M	1/6W	5%	RD16PJ105 1M	J01225105		24-		
R 3332	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		33-	A	C7
R 3333	CHIP RES.	33k	1/10W	5%	RMC1/10T 333J	J24205333		65-		
T 3001	COIL RF				R12py7947C	L0020422		1-	A	F3
T 3002	COIL 07RF				4.2U R12-T305X	L0022594		1-	A	G5
T 3003	COIL RF				R12py7947C	L0020422		1-	A	G4
T 3004	COIL 07RF	35.1MHz			35.1M R-M407A	L0021517		1-	A	G5
T 3005	COIL RF				R12py7947C	L0020422		1-	A	G4
T 3006	COIL 07RF	35.1MHz			35.1M R-M407A	L0021517		1-	A	G5
T 3007	COIL RF				R12py7947C	L0020422		1-	A	G3
T 3008	COIL RF				R12py7947C	L0020422		1-	A	H3
T 3009	CHIP TRANS.	10.7MHz			CP-4LB/SW 5113-JPS-096	L0022459A		1-	A	E2
TC3001	TRIMMER CAP.	60pF			TZ03P600E169B00	K91000084		1-	A	D1
TC3002	TRIMMER CAP.	60pF			TZ03P600E169B00	K91000084		1-	A	D2
TC3003	TRIMMER CAP.	60pF			TZ03P600E169B00	K91000084		1-	A	D2
VR3001	POT.	10k			EVN-5ESX50B14	J51811103		1-	A	H5
VR3001	POT.	22k			EVN-5ESX50BE4	J51811223		92-	A	H5
X 3001	XTAL HC-49/U	17.53MHz			17.53MHZ 3P	H0102664		1-	A	H5
X 3001	XTAL HC-49/U	17.53MHz			17.53MHZ 3P	H0103328		90-	A	H5
X 3001	XTAL HC-49/U	17.53MHz			17.53MHZ 3P	H0103340		97-	A	H5
X 3002	XTAL UM-1	10.245MHz			10.245MHZ	H0102773		1-	A	F2
X 3002	XTAL UM-1	10.245MHz			10.245MHZ	H0103367		97-	A	F2
X 3003	XTAL UM-1	45.505MHz			45.505MHZ	H0103132		1-	A	C5
X 3003	XTAL UM-1	45.505MHz			45.505MHZ	H0103338		97-	A	C5
XF3001	XTAL FILTER				10M15BM	H1102114		1-	A	F3
XF3001	XTAL FILTER				10M15BM	H1102412		97-	A	F3
XF3002	XTAL FILTER				10M15BM	H1102114		1-	A	F3
XF3002	XTAL FILTER				10M15BM	H1102412		97-	A	F3
XF3003	XTAL FILTER				45M15B1H	H1102253		1-	A	D4
XF3003	XTAL FILTER				45M15B1H	H1102414		97-	A	D4
XF3004	XTAL FILTER				45M15B1H	H1102253		1-	A	D5
XF3004	XTAL FILTER				45M15B1H	H1102414		97-	A	D5
	SHIELD CASE PLATE					RA0060200 R0154650	W/ CE	1- 6-		

IF Unit

Note





CNTL Unit (Lot. 1 ~ 60)


Note

CNTL Unit (Lot. 1 ~ 60)


Parts Layout (Side B)

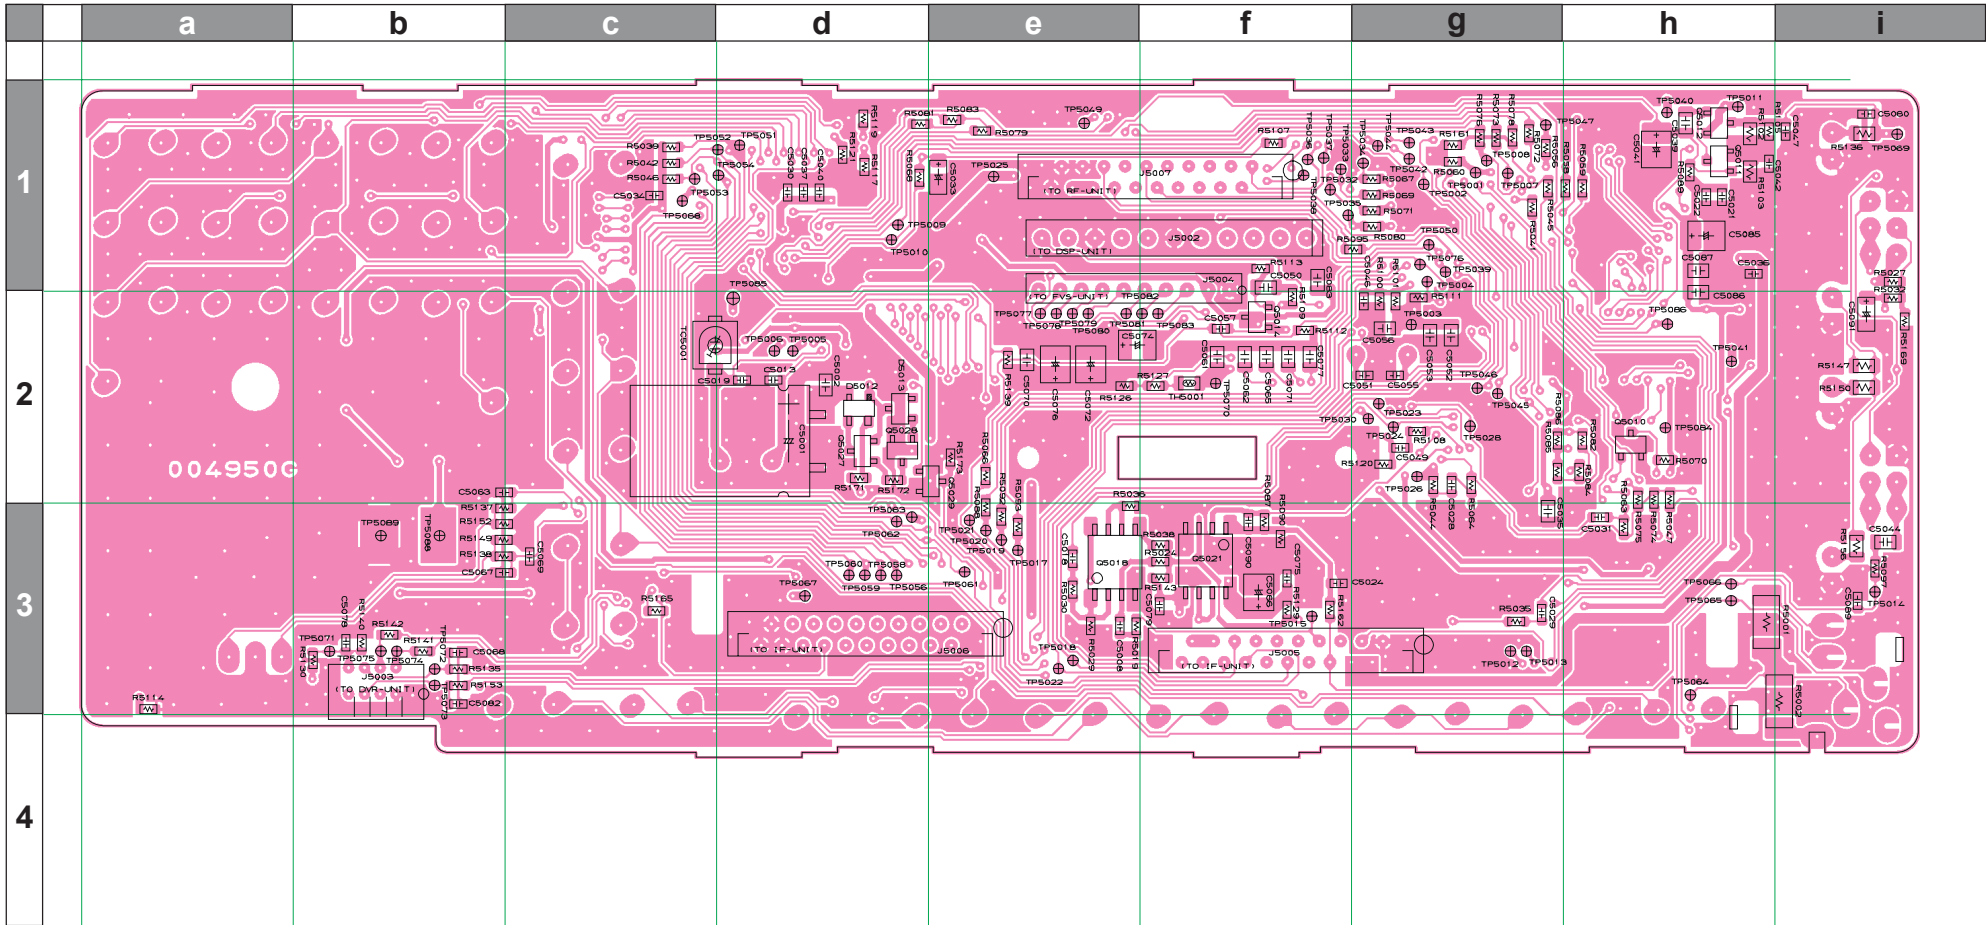


DTC124EK T146 (25)
(Q5010)




2SC1623-T2BL6 (L5)
(Q5011, 5014, 5015)




2SA1182Y TE85R (Z0)
(Q5012)
2SA1179 (M6)
(Q5027)




DTC144EK (26)
(Q5028, 5029)




BU4094BCFV-E1
(Q5013)




NJM2904M (TE2)
(Q5018, 5021)



BU4066BF-E2
(Q5019, 5020)




1SS391 (A5)
(D5012)

















02CZ3.3Z (3.3)
(D5013)

Circuit Diagram

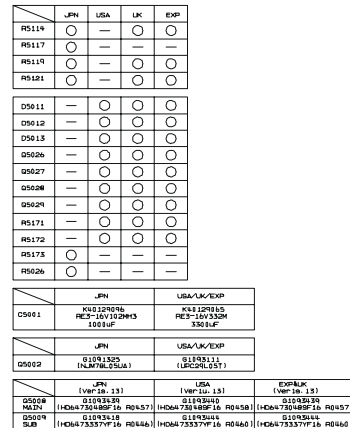

CNTL Unit (Lot. 1 ~ 60)



Note

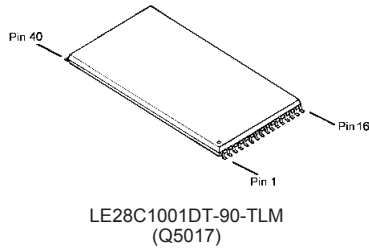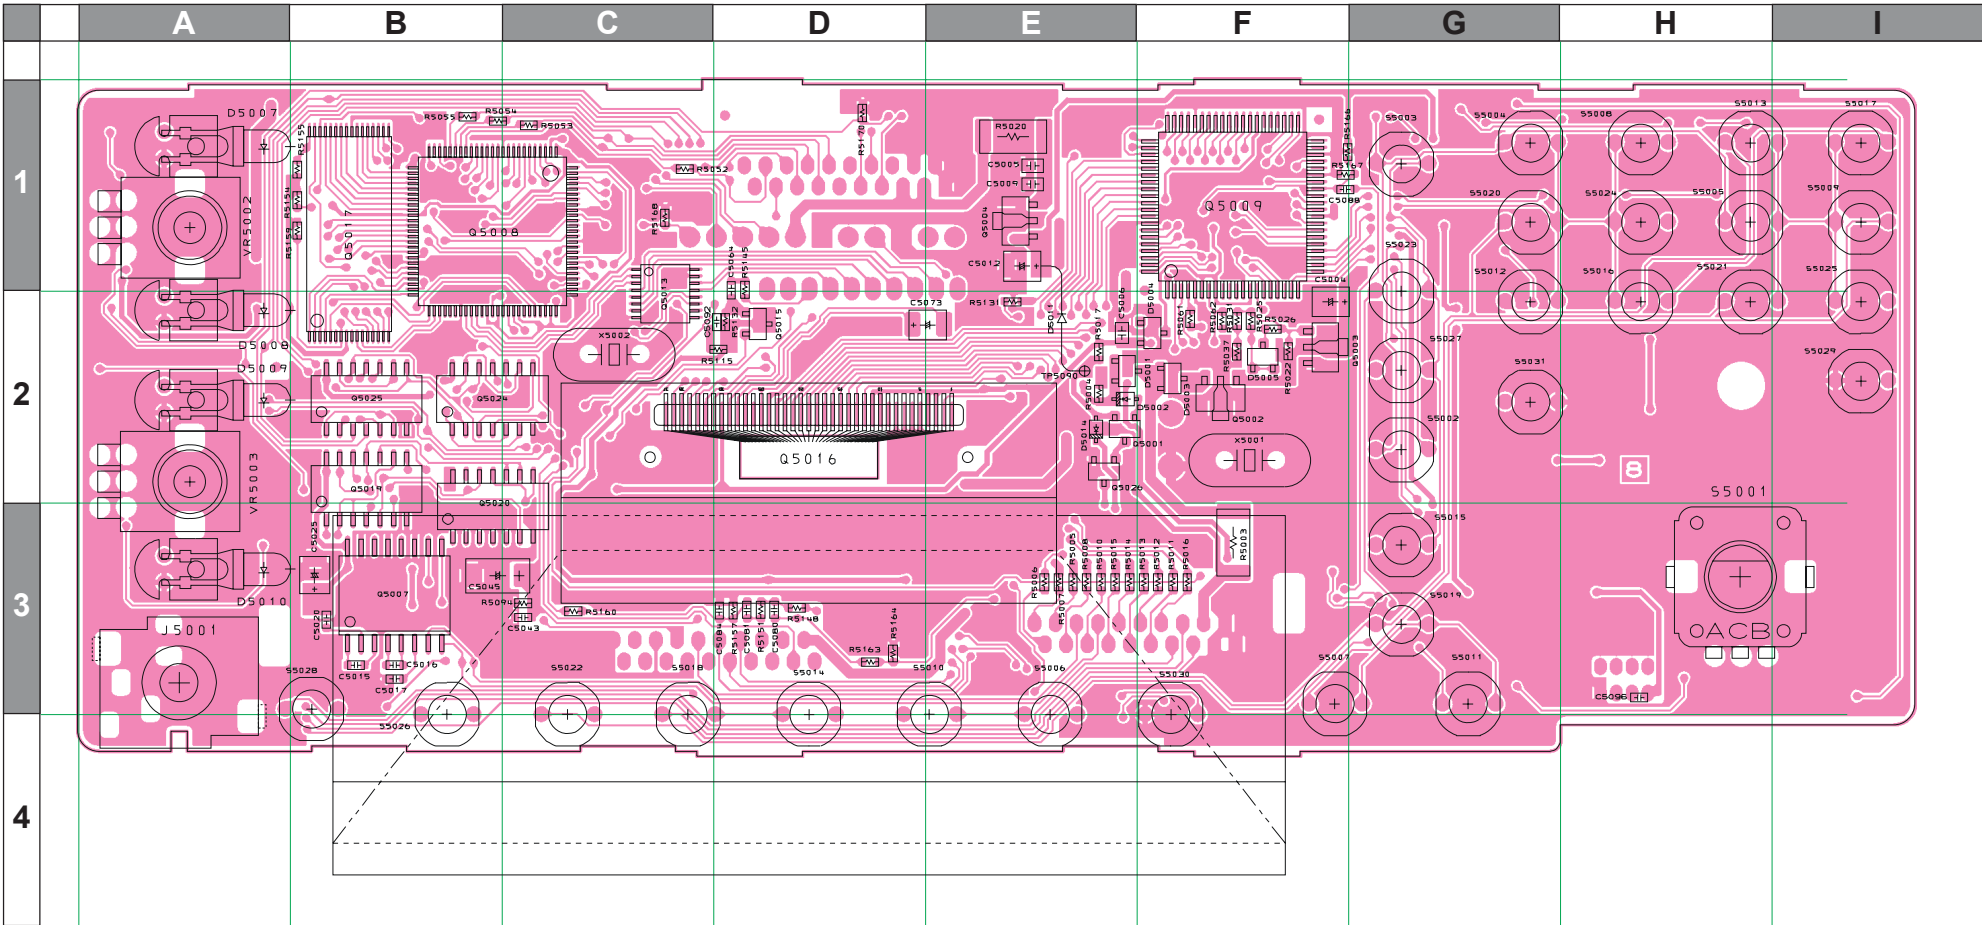


Downloaded by
RadioManual.EU

CNTL Unit (Lot. 61 ~)


Parts Layout (Side B)

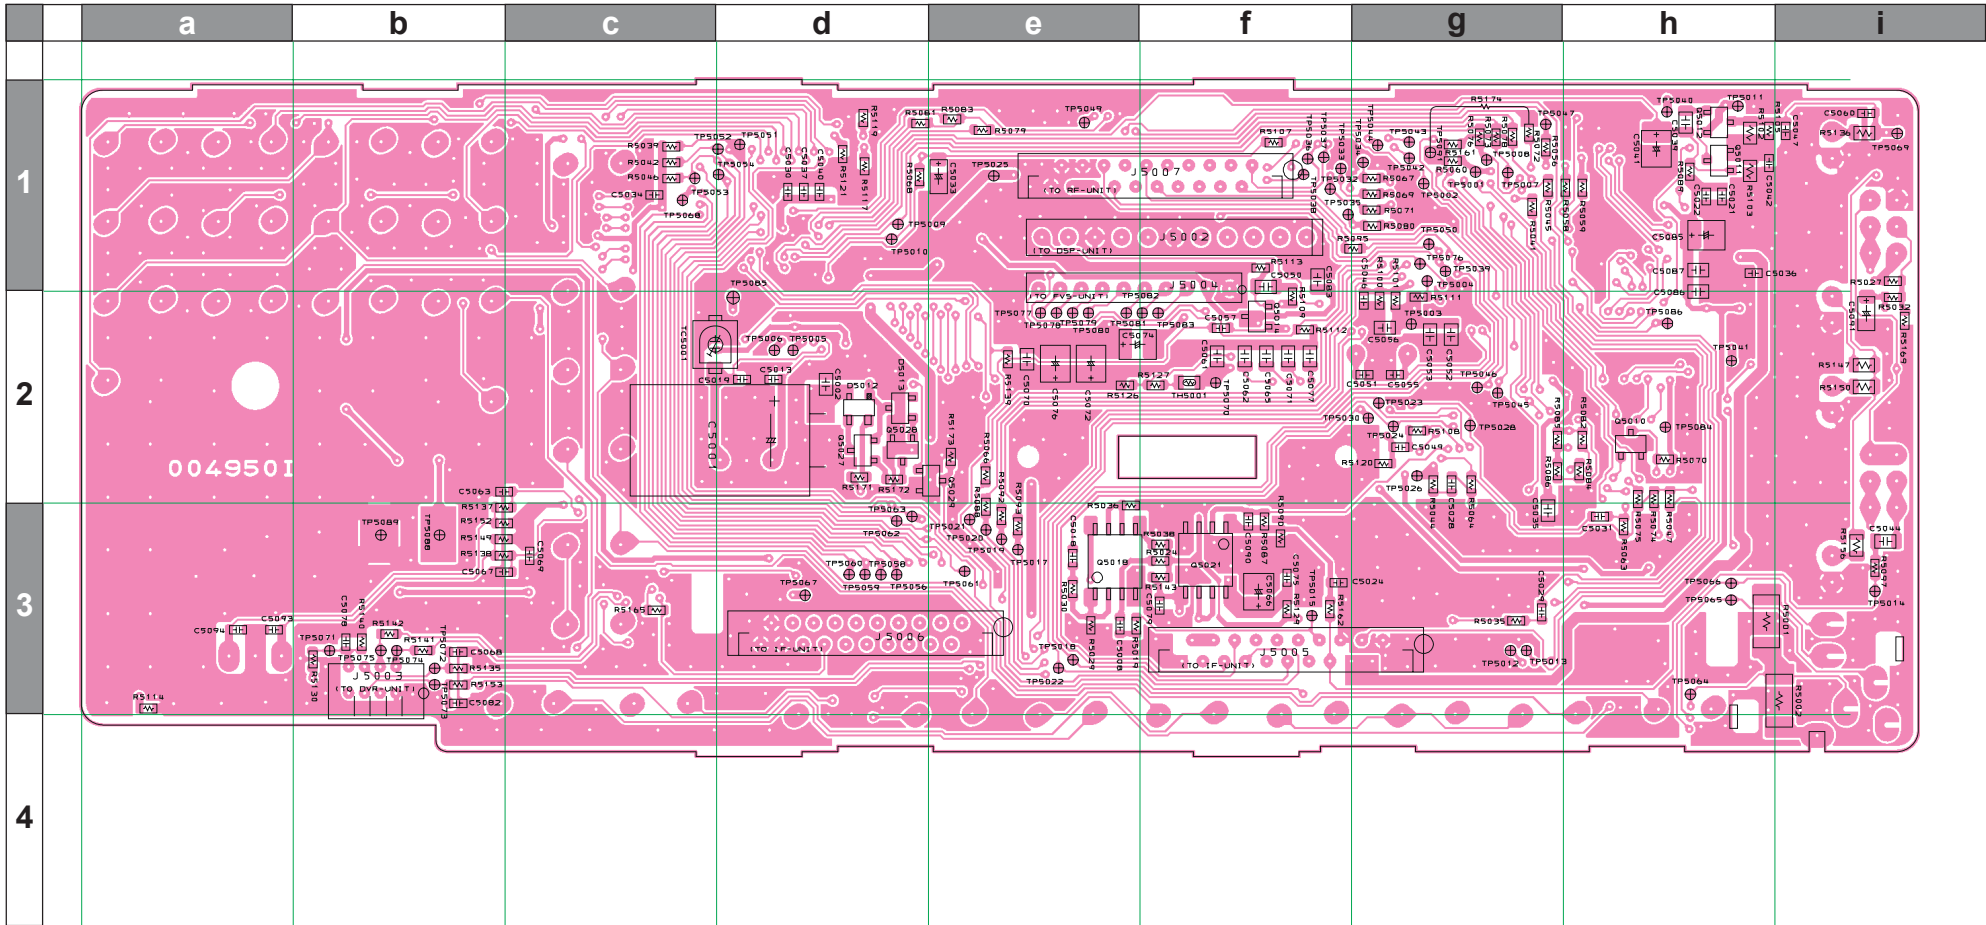


DTC124EK T146 (25)
(Q5010)




2SC1623-T2BL6 (L5)
(Q5011, 5014, 5015)




2SA1182Y TE85R (Z0)
(Q5012)
2SA1179 (M6)
(Q5027)




DTC144EK (26)
(Q5028, 5029)




BU4094BCFV-E1
(Q5013)




NJM2904M (TE2)
(Q5018, 5021)



BU4066BF-E2
(Q5019, 5020)



1SS391 (A5)
(D5012)



02CZ3.3Z (3.3)
(D5013)

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
PCB with Components						CB1101002 CB1101003 CB1101004 CB1101005 CB1101006	JAPAN USA EXPORT B2 UK EXPORT B1			
Printed Circuit Board						FR004950G FR004950I		1- 61-		
BT5001	NI-CD BATT.ASSY		7.2V		6-61FTH	Q9000765	EXPORT	3-		
BT5001	NI-CD BATT.ASSY		7.2V		B60K6W6H	Q9000806	EXPORT	47-82		
BT5001	NI-CD BATT.ASSY		7.2V		6-61FTH	Q9000765	UK	3-		
BT5001	NI-CD BATT.ASSY		7.2V		B60K6W6H	Q9000806	UK	47-82		
BT5001	NI-CD BATT.ASSY		7.2V		6-61FTH	Q9000765	USA	3-		
BT5001	NI-CD BATT.ASSY		7.2V		B60K6W6H	Q9000806	USA	47-82		
C 5001	AL.ELECTRO.CAP.	1000uF	16V		RE3-16V102MS 1000UF	K40129067	EXPORT JAPAN UK USA	1-5	B	d2
C 5001	AL.ELECTRO.CAP.	3300uF	16V		RE3-16V332MI6#	K40129065		6-	B	d2
C 5001	AL.ELECTRO.CAP.	1000uF	16V		RE3-16V102MH3#	K40129096		6-	B	d2
C 5001	AL.ELECTRO.CAP.	3300uF	16V		RE3-16V332MI6#	K40129065		6-	B	d2
C 5001	AL.ELECTRO.CAP.	3300uF	16V		RE3-16V332MI6#	K40129065	USA	6-	B	d2
C 5002	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	d2
C 5003	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-2		
C 5004	CHIP TA.CAP.	10uF	16V		TEESVB21C106M8R	K78120025		1-	A	F2
C 5005	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	E1
C 5006	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	E2
C 5008	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	e3
C 5008	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	e3
C 5009	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	E1
C 5012	AL.ELECTRO.CAP.	10uF	16V		RC2-16V100MD1#-T58	K46120004		1-	A	E1
C 5012	CHIP TA.CAP.	10uF	16V		TEESVB21C106M8R	K78120025		3-	A	E1
C 5013	CHIP CAP.	33pF	50V	CH	GRM1882C1H330JA01D	K22174223		1-	B	d2
C 5013	CHIP CAP.	56pF	50V	CH	GRM1882C1H560JA01D	K22174229		23-	B	d2
C 5015	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	B3
C 5015	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	B3
C 5016	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	B3
C 5016	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	B3
C 5017	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	B3
C 5017	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	B3
C 5018	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	e3
C 5018	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	e3
C 5019	CHIP CAP.	8pF	50V	CH	GRM1882C1H8R0DZ01D	K22174209		1-	B	d2
C 5019	CHIP CAP.	18pF	50V	CH	GRM1882C1H180JA01D	K22174217		3-	B	d2
C 5019	CHIP CAP.	8pF	50V	CH	GRM1882C1H8R0DZ01D	K22174209		18-	B	d2
C 5019	CHIP CAP.	5pF	50V	CH	GRM1882C1H5R0CZ01D	K22174206		22-	B	d2
C 5019	CHIP CAP.	1pF	50V	CK	GRM1884C1H1R0CZ01D	K22174202		26-	B	d2
C 5020	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	B3
C 5020	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	B3
C 5021	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	h1
C 5022	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	h1
C 5024	CHIP CAP.	0.001uF	50V	B	GRM188B11H102KA01D	K22174809		1-	B	f3
C 5025	CHIP TA.CAP.	10uF	16V		TEESVB21C106M8R	K78120025		1-	A	B3
C 5028	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	g2
C 5028	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	g2
C 5029	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	g3
C 5029	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	g3
C 5030	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	d1
C 5031	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	h3
C 5031	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	h3
C 5033	CHIP TA.CAP.	1uF	35V		TEESVA1V105M8R	K78160032		1-	B	e1
C 5034	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	c1
C 5035	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	g3
C 5036	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	h1
C 5037	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	d1
C 5039	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	h1
C 5040	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	d1
C 5041	CHIP TA.CAP.	10uF	16V		TEESVB21C106M8R	K78120025		1-	B	h1
C 5042	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	h1

CNTL Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
C 5043	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	A	C3
C 5044	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	i3
C 5045	CHIP TA.CAP.	100uF	6.3V		TEESVC0J107M12R	K78080049		1-	A	B3
C 5046	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	g2
C 5047	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	i1
C 5049	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	g2
C 5049	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	g2
C 5050	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	f1
C 5051	CHIP CAP.	33pF	50V	CH	GRM1882C1H330JA01D	K22174223		1-	B	g2
C 5052	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	g2
C 5053	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	g2
C 5055	CHIP CAP.	33pF	50V	CH	GRM1882C1H330JA01D	K22174223		1-	B	g2
C 5056	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	g2
C 5057	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	f2
C 5060	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	i1
C 5061	CHIP CAP.	0.33uF	16V	B	GRM40B334K16PT	K22120807		1-	B	f2
C 5062	CHIP CAP.	0.33uF	16V	B	GRM40B334K16PT	K22120807		1-	B	f2
C 5063	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	b2
C 5063	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	b2
C 5064	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	D1
C 5064	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	D1
C 5065	CHIP CAP.	0.33uF	16V	B	GRM40B334K16PT	K22120807		1-	B	f2
C 5066	CHIP TA.CAP.	10uF	16V		TEESVB21C106M8R	K78120025		1-	B	f3
C 5067	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	b3
C 5067	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	b3
C 5069	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-	B	c3
C 5070	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	e2
C 5071	CHIP CAP.	0.33uF	16V	B	GRM40B334K16PT	K22120807		1-	B	f2
C 5072	CHIP TA.CAP.	10uF	16V		TEESVB21C106M8R	K78120025		1-	B	e2
C 5073	CHIP TA.CAP.	10uF	16V		TEESVB21C106M8R	K78120025		1-	A	E2
C 5074	CHIP TA.CAP.	10uF	16V		TEESVB21C106M8R	K78120025		1-	B	e2
C 5075	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	f3
C 5075	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	B	f3
C 5076	CHIP TA.CAP.	10uF	16V		TEESVB21C106M8R	K78120025		1-	B	e2
C 5077	CHIP CAP.	0.33uF	16V	B	GRM40B334K16PT	K22120807		1-	B	f2
C 5079	CHIP CAP.	0.0022uF	50V	B	GRM188B11H222KA01D	K22174822		1-	B	f3
C 5080	CHIP CAP.	0.0033uF	50V	B	GRM188B11H332KA01D	K22174815		1-	A	D3
C 5081	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	A	D3
C 5081	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		3-	A	D3
C 5083	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	f1
C 5084	CHIP CAP.	0.0022uF	50V	B	GRM188B11H222KA01D	K22174822		1-	A	D3
C 5085	CHIP TA.CAP.	10uF	16V		TEESVB21C106M8R	K78120025		1-	B	h1
C 5086	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	h1
C 5087	CHIP CAP.	0.1uF	25V	B	GRM40B104M25PT	K22140811		1-	B	h1
C 5088	CHIP CAP.	0.1uF	16V	B	GRM188B11C104KA01D	K22124805		1-	A	F1
C 5089	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		1-32		
C 5090	CHIP CAP.	330pF	50V	CH	GRM1882C1H331JA01D	K22174253		1-	B	f3
C 5091	AL.ELECTRO.CAP.	10uF	16V		RC2-16V100MD1#	K40129012		1-	B	i2
C 5091	CHIP TA.CAP.	10uF	10V		TEESVA1A106M8R	K78100028		3-	B	i2
C 5092	CHIP CAP.	0.01uF	50V	B	GRM188B11H103KA01D	K22174823		3-		
C 5093	CHIP CAP.	0.056uF	16V	B	GRM188B11C563KA01D	K22124807		3-	B	a3
C 5094	CHIP CAP.	0.056uF	16V	B	GRM188B11C563KA01D	K22124807		3-	B	a3
C 5095	AL.ELECTRO.CAP.	10000uF	16V		RE3-16V103MK8#	K40129098	EXPORT	3-5		
C 5095	AL.ELECTRO.CAP.	10000uF	16V		RE3-16V103MK8#	K40129098	UK	3-5		
C 5095	AL.ELECTRO.CAP.	10000uF	16V		RE3-16V103MK8#	K40129098	USA	3-5		
C 5096	CHIP CAP.	1uF	10V	F	GRM188F11A105ZA01D	K22105001	EXPORT	3-4		
C 5096	CHIP CAP.	1uF	10V	F	GRM188F11A105ZA01D	K22105001	UK	3-4		
C 5096	CHIP CAP.	1uF	10V	F	GRM188F11A105ZA01D	K22105001	USA	3-4		
C 5096	CHIP CAP.	1uF	10V	F	GRM188F11A105ZA01D	K22105001		5-		
D 5001	DIODE				HZM7C-TR	G2070070		1-	A	E2
D 5001	DIODE				02CZ5.1Y(TE85R.F)	G2070062		3-	A	E2
D 5002	DIODE				1SS355 TE-17	G2070470		1-	A	E2
D 5003	DIODE				DAN202K T146	G2070182		1-	A	F2
D 5004	DIODE				DAN202K T146	G2070182		1-	A	F2
D 5005	DIODE				DAN202K T146	G2070182		1-	A	F2

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
D 5007	LED				NSPW310BS	G2090747		1-	A	B1
D 5008	LED				NSPW310BS	G2090747		1-	A	B2
D 5009	LED				NSPW310BS	G2090747		1-	A	B2
D 5010	LED				NSPW310BS	G2090747		1-	A	B3
D 5011	DIODE				1SS270-E	G2090408	EXPORT	3-		
D 5011	DIODE				1SS270-E	G2090408	UK	3-		
D 5011	DIODE				1SS270-E	G2090408	USA	3-		
D 5012	DIODE				1SS391(TE85L)	G2070510	EXPORT	3-	B	d2
D 5012	DIODE				1SS391(TE85L)	G2070510	UK	3-	B	d2
D 5012	DIODE				1SS391(TE85L)	G2070510	USA	3-	B	d2
D 5013	DIODE				02CZ3.3Z TE85R	G2070390	EXPORT	3-	B	d2
D 5013	DIODE				02CZ3.3Z TE85R	G2070390	UK	3-	B	d2
D 5013	DIODE				02CZ3.3Z TE85R	G2070390	USA	3-	B	d2
J 5001	CONNECTOR				LGM1509-0200	P1090872		1-	A	A3
J 5001	CONNECTOR				LGM1509-0202F	P1091310		85-	A	A3
J 5002	WIRE ASSY				A1361	T9206902		1	B	f1
J 5002	WIRE ASSY				A1361	T9206918		2	B	f1
J 5002	WIRE ASSY				A1361	T9206918		3-	B	f1
J 5003	CONNECTOR				53020-0810	P0090665		1-	B	b3
J 5003	CONNECTOR				9230B-1-04Z003-T	P0091493		96-	B	b3
J 5004	WIRE ASSY				A1361	T9206917		1-	B	f1
J 5005	CONNECTOR				20FMZ-BT(LF)(SN)	P1090903		1-	B	f3
J 5006	CONNECTOR				20FMZ-BT(LF)(SN)	P1090903		1-	B	d3
J 5007	CONNECTOR				20FMZ-BT(LF)(SN)	P1090903		1-	B	f1
J 5008	CONNECTOR				9230B-1-04Z003-T	P0091493		96-		
Q 5001	TRANSISTOR				2SA1179M6-TA	G3111797F		1-	A	E2
Q 5002	IC				NJM78L05UA-TE1	G1091325		1-2	A	F2
Q 5002	IC				UPC29L05J	G1093112	EXPORT	3	A	F2
Q 5002	IC				UPC29L05J	G1093112	EXPORT	4-	A	F2
Q 5002	IC				UPC29L05T-E1	G1093111	EXPORT	13-	A	F2
Q 5002	IC				NJM78L05UA-TE1	G1091325	JAPAN	3-	A	F2
Q 5002	IC				UPC29L05J	G1093112	UK	3	A	F2
Q 5002	IC				UPC29L05J	G1093112	UK	4-	A	F2
Q 5002	IC				UPC29L05T-E1	G1093111	UK	13-	A	F2
Q 5002	IC				UPC29L05J	G1093112	USA	3	A	F2
Q 5002	IC				UPC29L05J	G1093112	USA	4-	A	F2
Q 5002	IC				UPC29L05T-E1	G1093111	USA	13-	A	F2
Q 5003	IC				RH5VL45AA-T1	G1090966		1-	A	F2
Q 5003	IC				RH5VL45AA-T1	G1090966		3-	A	F2
Q 5004	IC				NJM78L05UA-TE1	G1091325		1-	A	E1
Q 5007	IC				ADM232LJR-REEL	G1092742		1-	A	B3
Q 5007	IC				MAX232CWE-T	G1091907		3-	A	B3
Q 5008	IC				HD6473048SF16 R1095	G1094353	EXPORT	1-	A	B1
Q 5008	IC				HD6473048SF16 R1095	G1094353	JAPAN	1-	A	B1
Q 5008	IC				HD6473048SF16 R1095	G1094353	UK	1-	A	B1
Q 5008	IC				HD6473048SF16 R1094	G1094352	USA	1-	A	B1
Q 5009	IC				HD6473337YF16 R0460	G1093444	EXPORT	1-	A	F1
Q 5009	IC				HD6473337YF16 R0463	G1093450	JAPAN	1-	A	F1
Q 5009	IC				HD6473337YF16 R0460	G1093444	UK	1-	A	F1
Q 5009	IC				HD6473337YF16 R0460	G1093444	USA	1-	A	F1
Q 5010	TRANSISTOR				DTC124EK T146	G3070034		1-	B	h2
Q 5011	TRANSISTOR				2SC1623-T2BL6	G3316237F		1-	B	h1
Q 5012	TRANSISTOR				2SA1182Y(TE85R.F)	G3111827Y		1-	B	h1
Q 5013	IC				BU4094BCFV-E1	G1092128		1-	A	C1
Q 5013	IC				BU4094BCFV-E2	G1093527		24-	A	C1
Q 5014	TRANSISTOR				2SC1623-T2BL6	G3316237F		1-	B	f2
Q 5015	TRANSISTOR				2SC1623-T2BL6	G3316237F		1-	A	D2
Q 5016	LCD MODULE				NCM1703A	Q7000372		1-	A	D2
Q 5017	IC				LE28C1001AT-12-TLM	G1092903		1-	A	B1
Q 5017	IC				LE28C1001DT-90-TLM	G1093366		3-	A	B1
Q 5018	IC				NJM2904M-TE2	G1093091		1-	B	e3
Q 5019	IC				BU4066BCF-E2	G1092593		1-	A	B2
Q 5020	IC				BU4066BCF-E2	G1092593		1-	A	B2
Q 5021	IC				NJM2904M-TE2	G1093091		1-	B	f3
Q 5024	IC				BU4081BF-E2	G1092720		1-	A	B2

CNTL Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
Q 5025	IC				BU4081BF-E2	G1092720		1-	A	B2
Q 5026	TRANSISTOR				DTC144EK T146	G3070033	EXPORT	3-	A	E2
Q 5026	TRANSISTOR				DTC144EK T146	G3070033	UK	3-	A	E2
Q 5026	TRANSISTOR				DTC144EK T146	G3070033	USA	3-	A	E2
Q 5027	TRANSISTOR				2SA1179M6-TA	G3111797F	EXPORT	3-	B	d2
Q 5027	TRANSISTOR				2SA1179M6-TA	G3111797F	UK	3-	B	d2
Q 5027	TRANSISTOR				2SA1179M6-TA	G3111797F	USA	3-	B	d2
Q 5028	TRANSISTOR				DTC144EK T146	G3070033	EXPORT	3-	B	d2
Q 5028	TRANSISTOR				DTC144EK T146	G3070033	UK	3-	B	d2
Q 5028	TRANSISTOR				DTC144EK T146	G3070033	USA	3-	B	d2
Q 5029	TRANSISTOR				DTC144EK T146	G3070033	EXPORT	3-	B	e2
Q 5029	TRANSISTOR				DTC144EK T146	G3070033	UK	3-	B	e2
Q 5029	TRANSISTOR				DTC144EK T146	G3070033	USA	3-	B	e2
R 5001	CHIP RES.	470	1/2W	5%	RMC1/2 471JCTP	J24275471		1-	B	h3
R 5002	CHIP RES.	470	1/2W	5%	RMC1/2 471JCTP	J24275471		1-	B	i3
R 5003	CHIP RES.	4.7	1W	5%	RMC1 4R7JTE	J24305479		1-	A	F3
R 5004	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	E2
R 5005	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	E3
R 5006	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	E3
R 5007	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	E3
R 5008	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	A	E3
R 5010	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	A	E3
R 5011	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	F3
R 5012	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	F3
R 5013	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	F3
R 5014	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	A	E3
R 5015	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	A	E3
R 5016	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	F3
R 5017	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-3	A	E2
R 5017	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103	EXPORT	4-	A	E2
R 5017	CHIP RES.	12k	1/16W	5%	RMC1/16 123JATP	J24185123	EXPORT	6-	A	E2
R 5017	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103	JAPAN	4-	A	E2
R 5017	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103	UK	4-	A	E2
R 5017	CHIP RES.	12k	1/16W	5%	RMC1/16 123JATP	J24185123	UK	6-	A	E2
R 5017	CHIP RES.	12k	1/16W	5%	RMC1/16 123JATP	J24185123	USA	4-	A	E2
R 5018	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-2		
R 5019	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	e3
R 5020	CHIP RES.	4.7	1W	5%	RMC1 4R7JTE	J24305479		1-	A	E1
R 5022	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	F2
R 5024	CHIP RES.	1M	1/16W	5%	RMC1/16 105JATP	J24185105		1-	B	f3
R 5025	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	A	F2
R 5026	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-2	A	F2
R 5026	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102	JAPAN	3-	A	F2
R 5029	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	e3
R 5030	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	e3
R 5031	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	A	F2
R 5032	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	i2
R 5035	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	g3
R 5036	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	e2
R 5037	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	F2
R 5038	CHIP RES.	1M	1/16W	5%	RMC1/16 105JATP	J24185105		1-	B	f3
R 5039	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	B	c1
R 5041	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	B	g1
R 5042	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	B	c1
R 5044	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	g2
R 5045	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	B	g1
R 5046	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	B	c1
R 5047	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	h2
R 5052	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	C1
R 5053	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	C1
R 5054	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	B1
R 5055	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	A	B1
R 5056	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	g1
R 5057	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-2		
R 5058	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	h1

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 5059	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	h1
R 5060	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	g1
R 5061	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	F2
R 5062	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	F2
R 5063	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	h3
R 5064	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	g2
R 5066	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	e2
R 5067	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	g1
R 5068	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	d1
R 5069	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	g1
R 5070	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	B	h2
R 5071	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	g1
R 5072	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	B	g1
R 5073	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	B	g1
R 5074	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	h2
R 5075	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	h2
R 5076	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	B	g1
R 5078	CHIP RES.	330	1/16W	5%	RMC1/16 331JATP	J24185331		1-	B	g1
R 5079	CHIP RES.	82k	1/16W	5%	RMC1/16 823JATP	J24185823		1-	B	e1
R 5080	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	g1
R 5081	CHIP RES.	39k	1/16W	5%	RMC1/16 393JATP	J24185393		1-	B	d1
R 5082	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	B	h2
R 5082	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		3-	B	h2
R 5083	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	B	e1
R 5084	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	B	h2
R 5084	CHIP RES.	18k	1/16W	5%	RMC1/16 183JATP	J24185183		3-	B	h2
R 5085	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	B	g2
R 5086	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	B	g2
R 5087	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	f3
R 5088	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	e2
R 5089	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	h1
R 5090	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	f3
R 5092	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	e3
R 5093	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	e3
R 5094	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	A	C3
R 5095	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	g1
R 5097	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	i3
R 5101	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000		1-	B	g2
R 5102	CHIP RES.	180	1/10W	5%	RMC1/10T 181J	J24205181		1-	B	h1
R 5103	CHIP RES.	220	1/10W	5%	RMC1/10T 221J	J24205221		1-	B	h1
R 5107	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	B	f1
R 5108	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	B	g2
R 5108	CHIP RES.	6.8k	1/16W	5%	RMC1/16 682JATP	J24185682		24-	B	g2
R 5109	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		1-	B	f2
R 5111	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	B	g2
R 5112	CARBON FILM RES.	100k	1/6W	5%	RD16TPJ104 100K	J07225104		1-	B	f2
R 5112	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		3-	B	f2
R 5113	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	f1
R 5114	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000	EXPORT	1-17	B	a3
R 5114	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000	JAPAN	1-	B	a3
R 5114	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000	VERSION B2	18-	B	a3
R 5115	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	A	D2
R 5117	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000	JAPAN	1-	B	d1
R 5119	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000	EXPORT	1-	B	d1
R 5119	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000	JAPAN	1-	B	d1
R 5119	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000	UK	1-	B	d1
R 5120	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	B	g2
R 5121	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000	EXPORT	1-	B	d1
R 5121	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000	JAPAN	1-	B	d1
R 5121	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000	UK	1-	B	d1
R 5126	CHIP RES.	220k	1/16W	5%	RMC1/16 224JATP	J24185224		1-	B	e2
R 5127	CHIP RES.	56k	1/16W	5%	RMC1/16 563JATP	J24185563		1-	B	f2
R 5129	CHIP RES.	5.6k	1/16W	5%	RMC1/16 562JATP	J24185562		1-	B	f3
R 5130	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	b3
R 5131	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	A	E2

CNTL Unit

Parts List

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
R 5132	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	A	D2
R 5135	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	b3
R 5136	CHIP RES.	180	1/10W	5%	RMC1/10T 181J	J24205181		1-	B	i1
R 5137	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	b2
R 5138	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	b3
R 5139	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		1-	B	e2
R 5140	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	B	b3
R 5141	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	b3
R 5141	CHIP RES.	33k	1/16W	5%	RMC1/16 333JATP	J24185333		3-	B	b3
R 5142	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	b3
R 5142	CHIP RES.	22k	1/16W	5%	RMC1/16 223JATP	J24185223		3-	B	b3
R 5143	CHIP RES.	2.2M	1/16W	5%	RMC1/16 225JATP	J24185225		1-	B	f3
R 5145	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	D1
R 5147	CHIP RES.	180	1/10W	5%	RMC1/10T 181J	J24205181		1-	B	i2
R 5148	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	D3
R 5149	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	b3
R 5150	CHIP RES.	180	1/10W	5%	RMC1/10T 181J	J24205181		1-	B	i2
R 5151	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	D3
R 5152	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	b3
R 5153	CHIP RES.	470	1/16W	5%	RMC1/16 471JATP	J24185471		1-	B	b3
R 5154	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	B1
R 5155	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	B1
R 5156	CHIP RES.	180	1/10W	5%	RMC1/10T 181J	J24205181		1-	B	i3
R 5157	CHIP RES.	1k	1/16W	5%	RMC1/16 102JATP	J24185102		1-	A	D3
R 5159	CHIP RES.	47k	1/16W	5%	RMC1/16 473JATP	J24185473		1-	A	B1
R 5160	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	C3
R 5161	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	B	g1
R 5162	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	f3
R 5163	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	A	D3
R 5164	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	A	D3
R 5165	CHIP RES.	3.3k	1/16W	5%	RMC1/16 332JATP	J24185332		1-	B	c3
R 5166	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	G1
R 5167	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		1-	A	F1
R 5168	CARBON FILM RES.	100k	1/6W	5%	RD16TPJ104 100K	J07225104		1-	A	C1
R 5168	CHIP RES.	100k	1/16W	5%	RMC1/16 104JATP	J24185104		3-	A	C1
R 5169	CHIP RES.	4.7k	1/16W	5%	RMC1/16 472JATP	J24185472		1-	B	i2
R 5170	CARBON FILM RES.	10k	1/6W	5%	RD16TPJ103 10K	J07225103		1-	A	D1
R 5170	CHIP RES.	10k	1/16W	5%	RMC1/16 103JATP	J24185103		3-	A	D1
R 5171	CHIP RES.	560	1/16W	5%	RMC1/16 561JATP	J24185561	EXPORT	3-	B	d2
R 5171	CHIP RES.	560	1/16W	5%	RMC1/16 561JATP	J24185561	UK	3-	B	d2
R 5171	CHIP RES.	560	1/16W	5%	RMC1/16 561JATP	J24185561	USA	3-	B	d2
R 5172	CHIP RES.	2.7k	1/16W	5%	RMC1/16 272JATP	J24185272	EXPORT	3-	B	d2
R 5172	CHIP RES.	2.7k	1/16W	5%	RMC1/16 272JATP	J24185272	UK	3-	B	d2
R 5172	CHIP RES.	2.7k	1/16W	5%	RMC1/16 272JATP	J24185272	USA	3-	B	d2
R 5173	CHIP RES.	0	1/16W	5%	RMC1/16 000JATP	J24185000	JAPAN	3-	B	e2
R 5174	CARBON FILM RES.	100k	1/6W	5%	RD16TPJ104 100K	J07225104	USA	4-5		
R 5174	CARBON FILM RES.	100k	1/6W	5%	RD16TPJ104 100K	J07225104		6-		
S 5001	ROTARY ENCODER				EC12E2420404	Q9000735		1-	A	H3
S 5002	TACT SWITCH				EVQ11L09K	N5090101		1-	A	G2
S 5003	TACT SWITCH				EVQ11L09K	N5090101		1-	A	G1
S 5004	TACT SWITCH				EVQ11L09K	N5090101		1-	A	G1
S 5005	TACT SWITCH				EVQ11L09K	N5090101		1-	A	H1
S 5006	TACT SWITCH				EVQ11L09K	N5090101		1-	A	E3
S 5007	TACT SWITCH				EVQ11L09K	N5090101		1-	A	F3
S 5008	TACT SWITCH				EVQ11L09K	N5090101		1-	A	H1
S 5009	TACT SWITCH				EVQ11L09K	N5090101		1-	A	I1
S 5010	TACT SWITCH				EVQ11L09K	N5090101		1-	A	E3
S 5011	TACT SWITCH				EVQ11L09K	N5090101		1-	A	G3
S 5012	TACT SWITCH				EVQ11L09K	N5090101		1-	A	G2
S 5013	TACT SWITCH				EVQ11L09K	N5090101		1-	A	H1
S 5014	TACT SWITCH				EVQ11L09K	N5090101		1-	A	D3
S 5015	TACT SWITCH				EVQ11L09K	N5090101		1-	A	G3
S 5016	TACT SWITCH				EVQ11L09K	N5090101		1-	A	H2
S 5017	TACT SWITCH				EVQ11L09K	N5090101		1-	A	I1
S 5018	TACT SWITCH				EVQ11L09K	N5090101		1-	A	C3

REF.	DESCRIPTION	VALUE	V/W	TOL.	MFR'S DESIG	VXSTD P/N	VERS.	LOT.	SIDE	LAY ADR
S 5019	TACT SWITCH				EVQ11L09K	N5090101		1-	A	G3
S 5020	TACT SWITCH				EVQ11L09K	N5090101		1-	A	G1
S 5021	TACT SWITCH				EVQ11L09K	N5090101		1-	A	H2
S 5022	TACT SWITCH				EVQ11L09K	N5090101		1-	A	C3
S 5023	TACT SWITCH				EVQ11L09K	N5090101		1-	A	G1
S 5024	TACT SWITCH				EVQ11L09K	N5090101		1-	A	H1
S 5025	TACT SWITCH				EVQ11L09K	N5090101		1-	A	I2
S 5026	TACT SWITCH				EVQ11L09K	N5090101		1-	A	B3
S 5027	TACT SWITCH				EVQ11L09K	N5090101		1-	A	G2
S 5028	TACT SWITCH				EVQ11L09K	N5090101		1-	A	B3
S 5029	TACT SWITCH				EVQ11L09K	N5090101		1-	A	I2
S 5030	TACT SWITCH				EVQ11L09K	N5090101		1-	A	F3
S 5031	TACT SWITCH				EVQ11L09K	N5090101		1-	A	G2
TC5001	TRIMMER CAP.	20pF			TZB4R200AB10R00	K91000190		1-	B	c2
TC5001	TRIMMER CAP.	30pF			ECR-JA030E11X	K91000253		22-	B	c2
TH5001	THERMISTOR				NTCG203SH223JT	G9090106		1-	B	f2
VR5002	POT.				RH96D190 10KA/10KC	J62800135		1-	A	A1
VR5003	POT.				RH96D190 22F A103 A103	J62800138		1-	A	A2
X 5001	XTAL HC-49U/4	12.288MHz			12.288MHZ	H0103171		1-	A	F2
X 5001	XTAL HC-49U/4	12.288MHz			12.288MHZ	H0103333		97-	A	F2
X 5002	XTAL HC-49U/4	12.288MHz			12.288MHZ	H0103171		1-	A	C2
X 5002	XTAL HC-49U/4	12.288MHz			12.288MHZ	H0103333		97-	A	C2
	LED SPACER				LA-5-7	S6000389		1-		
	REFLECTOR SHEET					RA0231900		1-		
	DIFFUSER SHEET					RA0231800		1-		
	DIFFUSER SHEET					RA023180A		3-		
	COLOR FILTER					RA0231700		1-		
	COLOR FILTER					RA023170A		3-		
	LIGHT GUIDE					RA0231600		1-		
	LIGHT GUIDE					RA023160A		3-		
	XTAL SPACER					R7105670		1-		
	FIBER SHEET					R7107410		3-		
	MYLAR SHEET					RA0260300		1-2		
	SPONGE RUBBER				(BT-C)	RA0309700	USA	3		
	SPONGE RUBBER				(BT-C)	RA0309700		4-		

Downloaded by
RadioManual.EU

CNTL Unit

Note

**Downloaded by
RadioManual.EU**