


RESISTANCE CHART

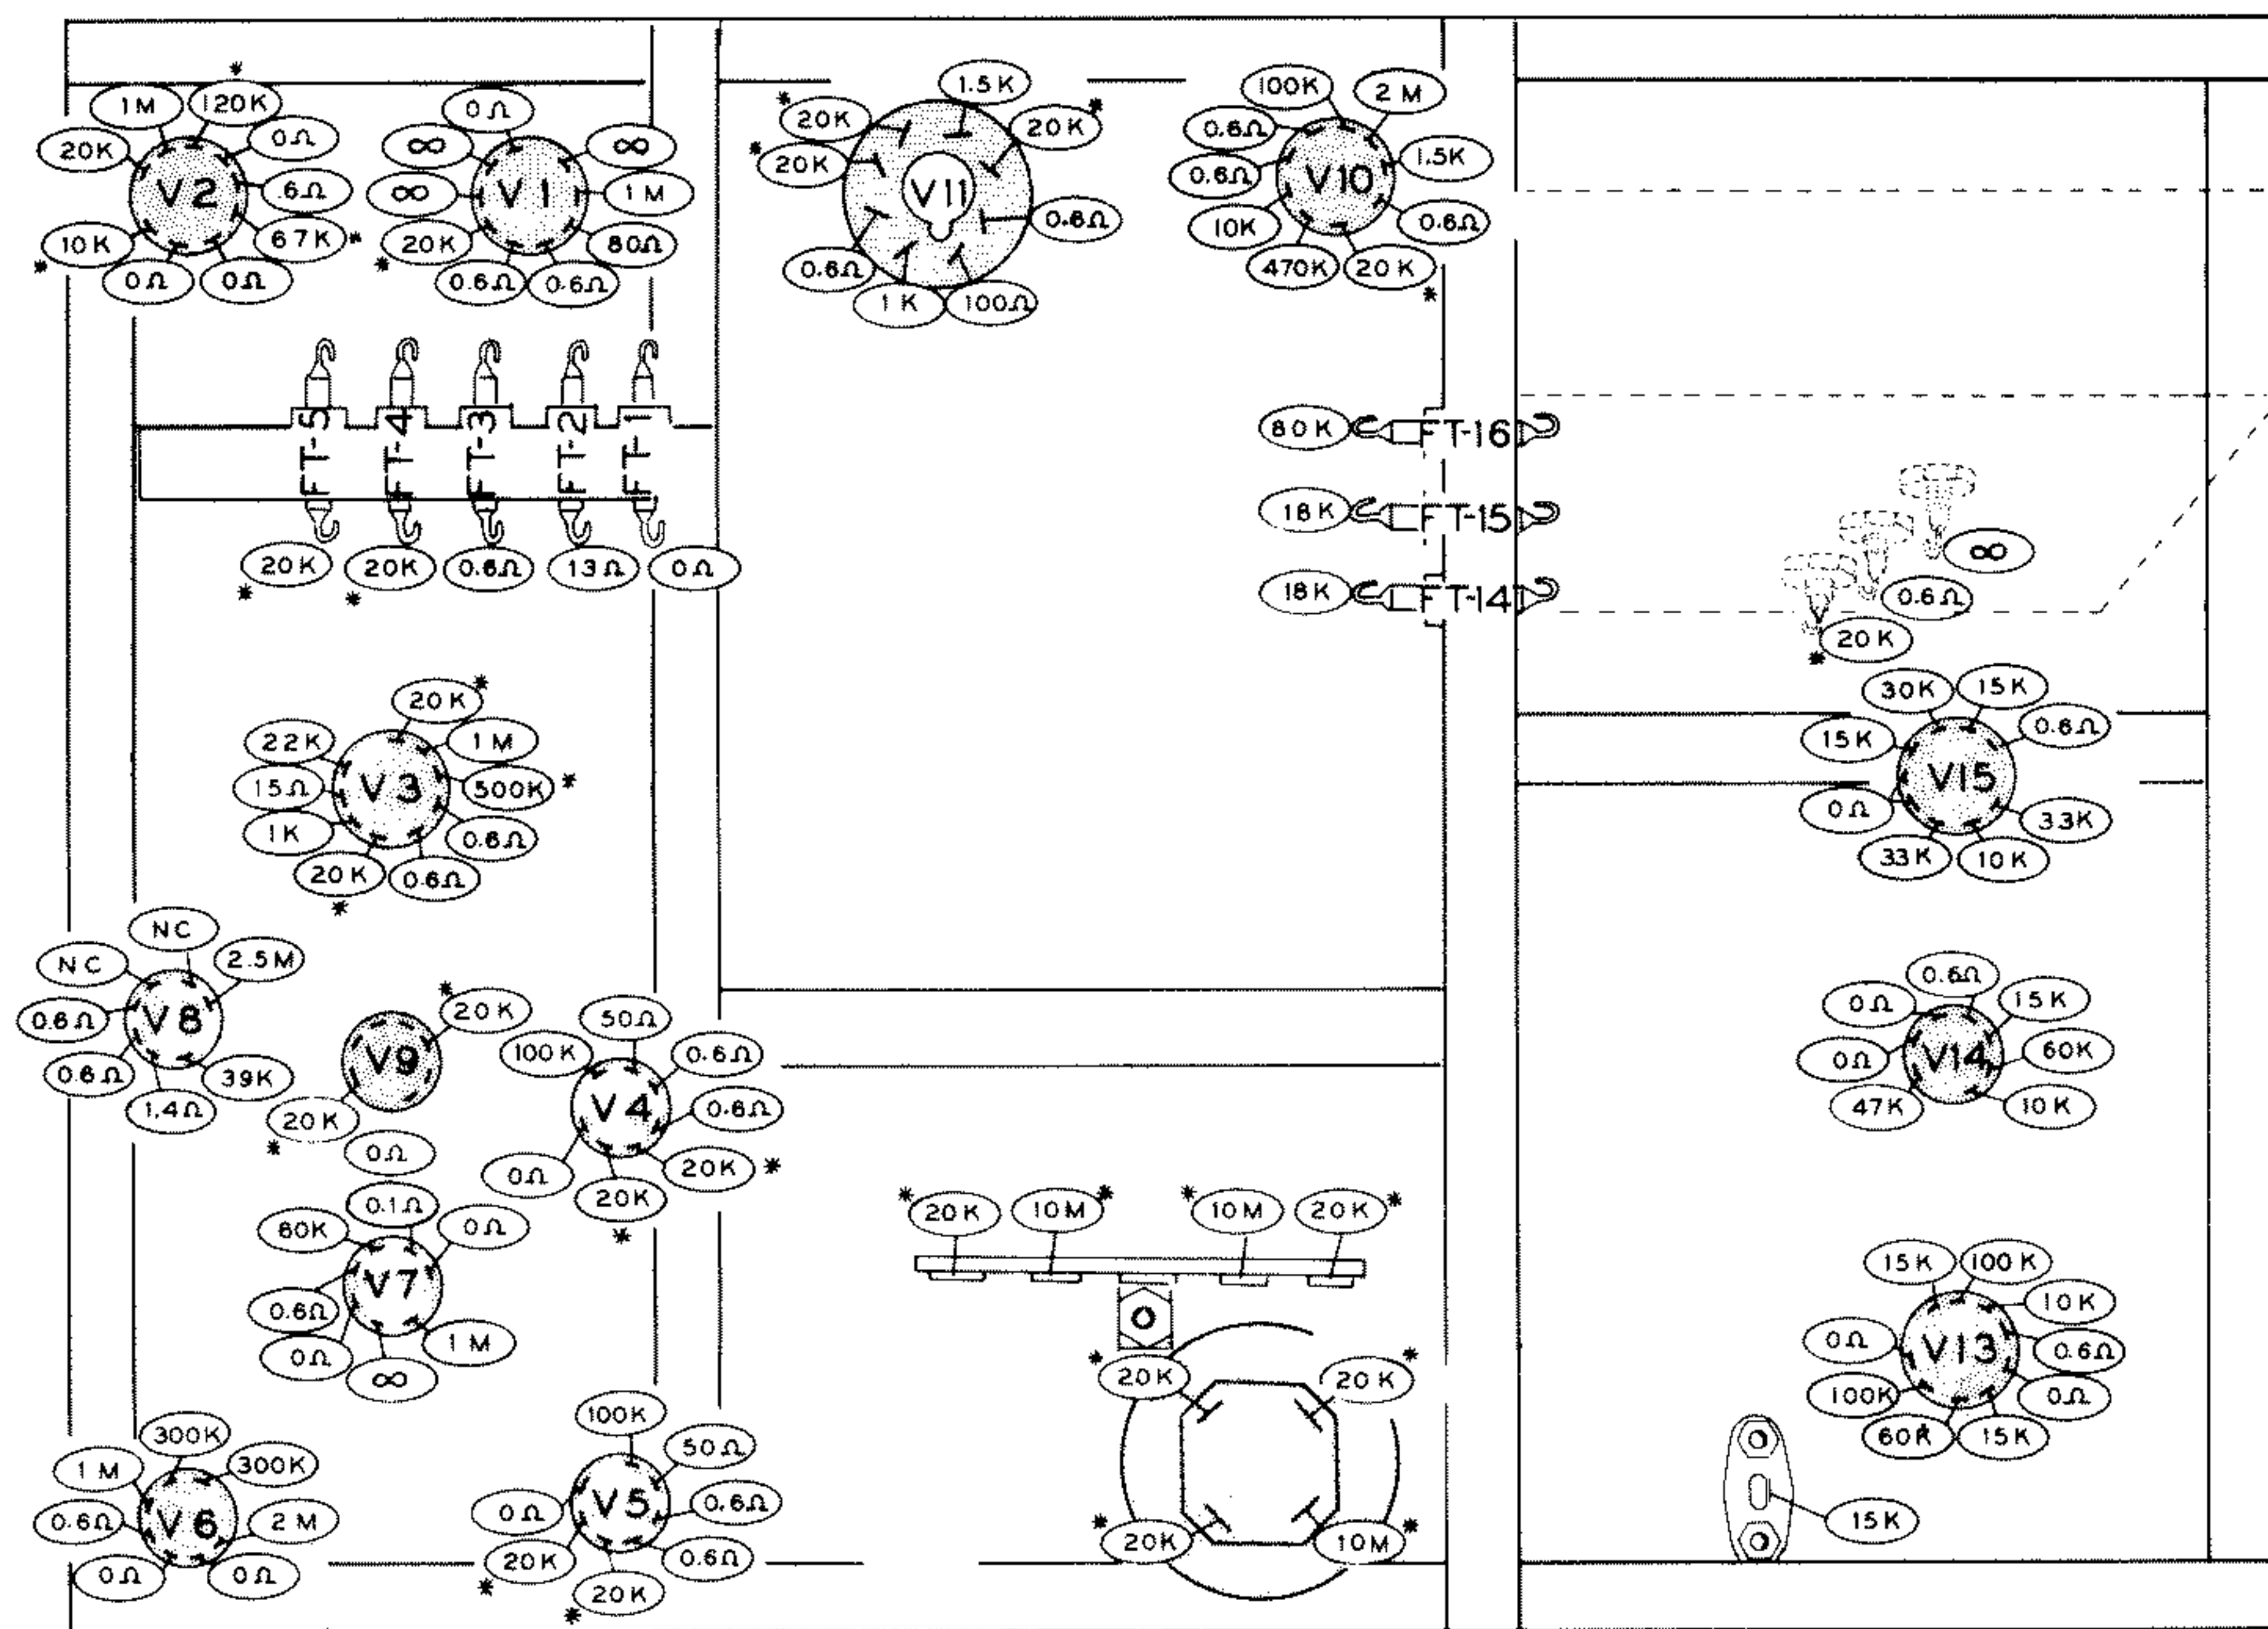

CONTROLS ARE SET AS FOLLOWS:

AVC : OFF
 RF GAIN : FULL CW
 BFO/PITCH : PUSHED IN AND FULL CCW
 ANL/SQUELCH : PUSHED IN AND FULL CCW
 FINAL TUNE : FULL CCW
 SPOT : OFF
 CW-AM : AM
 AUDIO : POWER OFF
 X2-X3-X4-VFO : X4
 RCVR TUNE : DIAL POINTER SET AT 50 MC
 TRANS. TUNE : DIAL POINTER SET AT 50 MC
 COUPLING : FULL CCW

LOADING : CAPACITOR PLATES FULL MESHED
 MOD. LEVEL : PUSHED IN AND FULL CCW
 MOD. MONITOR : OFF
 POWER CORD DISCONNECTED

**IF READING IS ABNORMALLY LOW - REVERSE METER PROBES.

M = Meg
 K = 1,000
 * MINIMUM READING AFTER 5 SECONDS.
 WITH ALL TUBES IN SOCKETS.

HEATHKIT DAYSTROM SHAWNEE MODEL HW-10

ALL RESISTORS ARE 1/2 WATT UNLESS OTHERWISE SPECIFIED.
 ALL CAPACITOR VALUES ARE IN μf UNLESS SHOWN OTHERWISE.
 CAPACITORS DESIGNATED WITH FT ARE FEED-THROUGH TYPE.
 RELAYS RL1 AND RL2 ARE SHOWN IN RECEIVE CONDITION.
 XTAL-VFO SWITCH SHOWN IN VFO POSITION.
 POWER SWITCH SHOWN IN ON POSITION.
 CW-AM SWITCH SHOWN IN AM POSITION.
 P.A. SWITCH SHOWN IN OFF POSITION.
 MODULATION MONITOR SWITCH SHOWN IN OFF POSITION.
 SPOT SWITCH SHOWN IN OFF POSITION.
 AVC SWITCH SHOWN IN ON POSITION.

