



Power cable



POWER SOURCE
DC 9-15V, 3A max

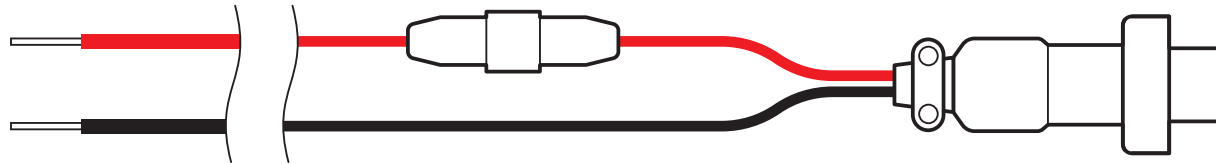



Lab599 TX-500
"DC 9-15V" socket

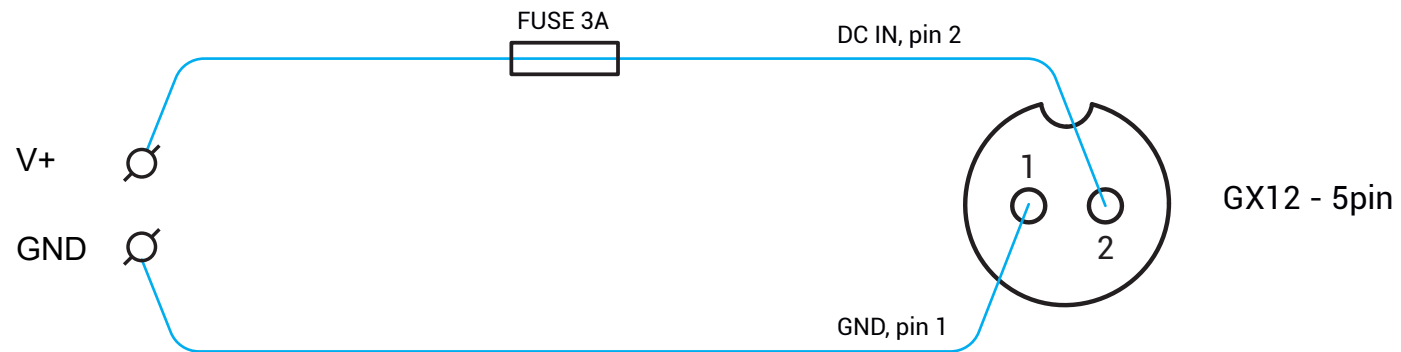



CW key adapter

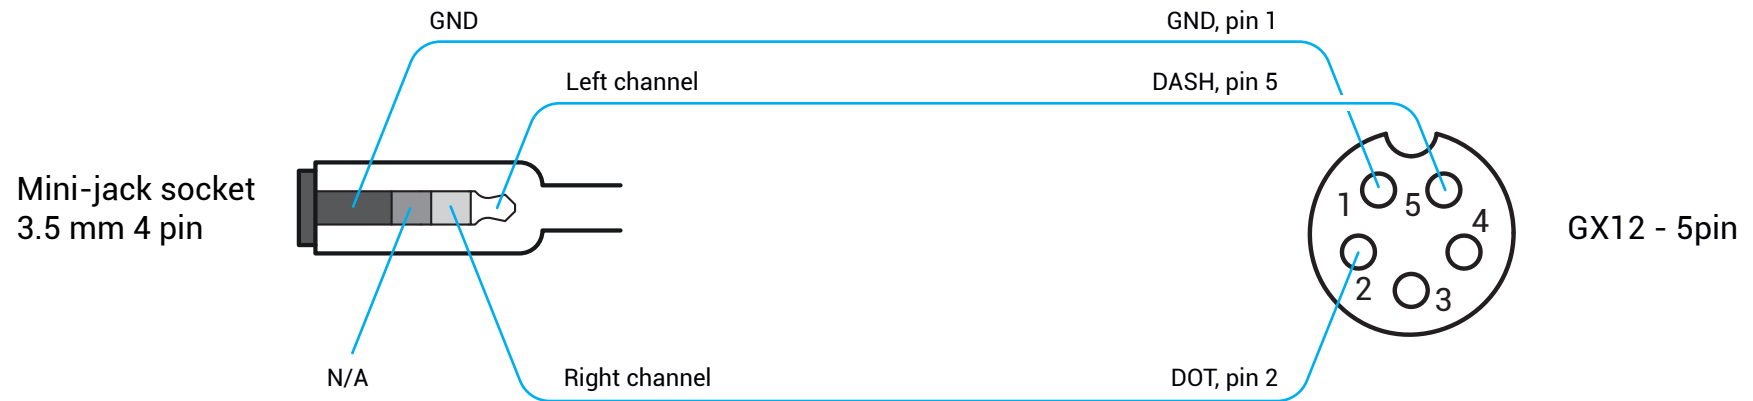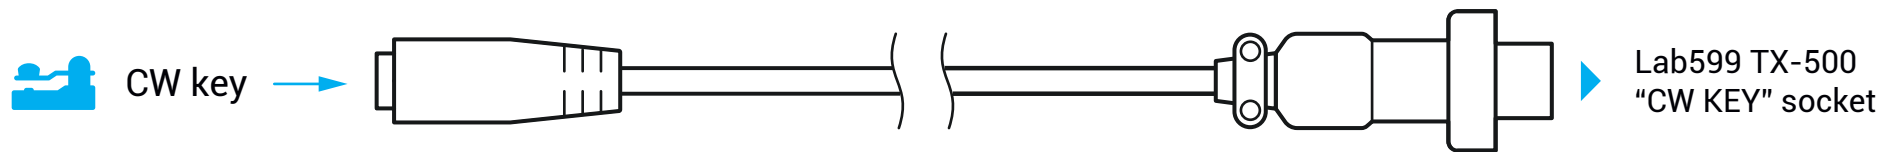

Remote Speaker Microphone

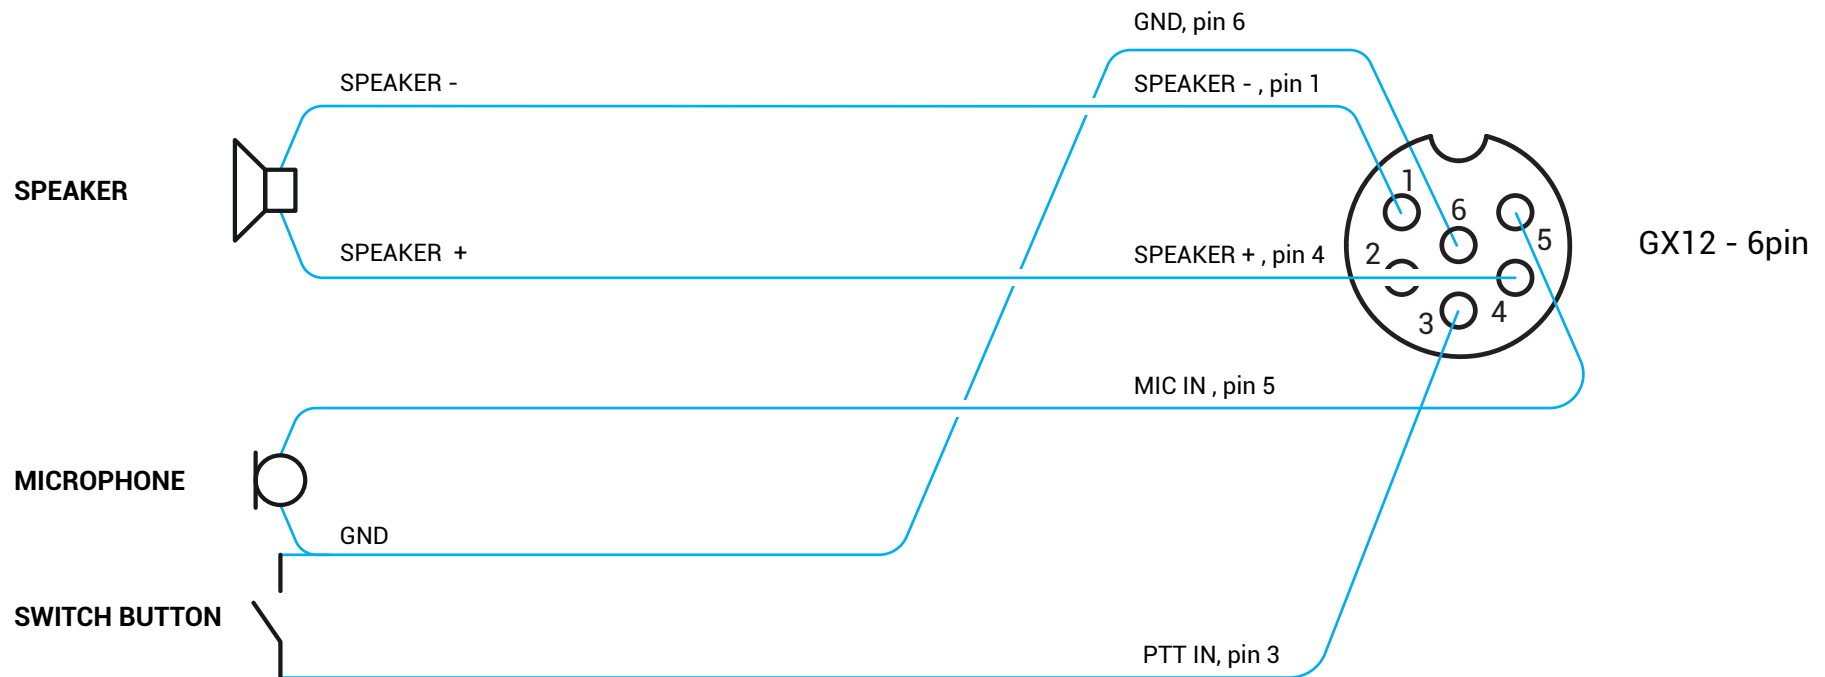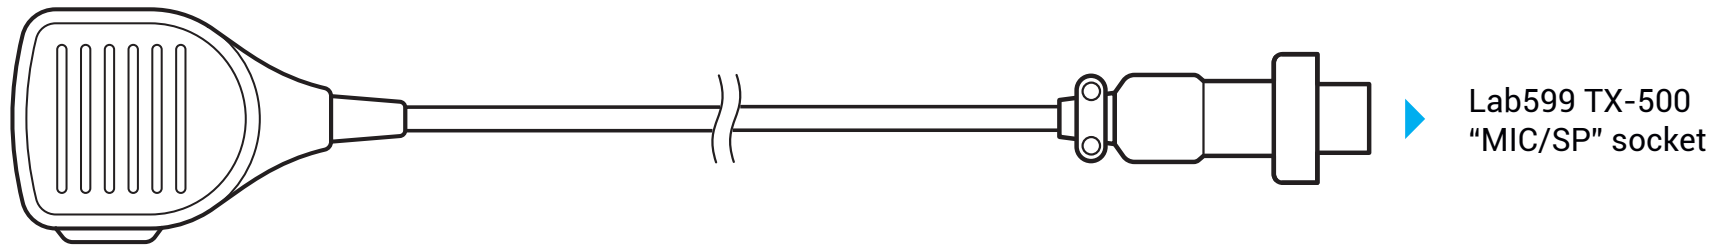


MIC/SP/PTT adapter

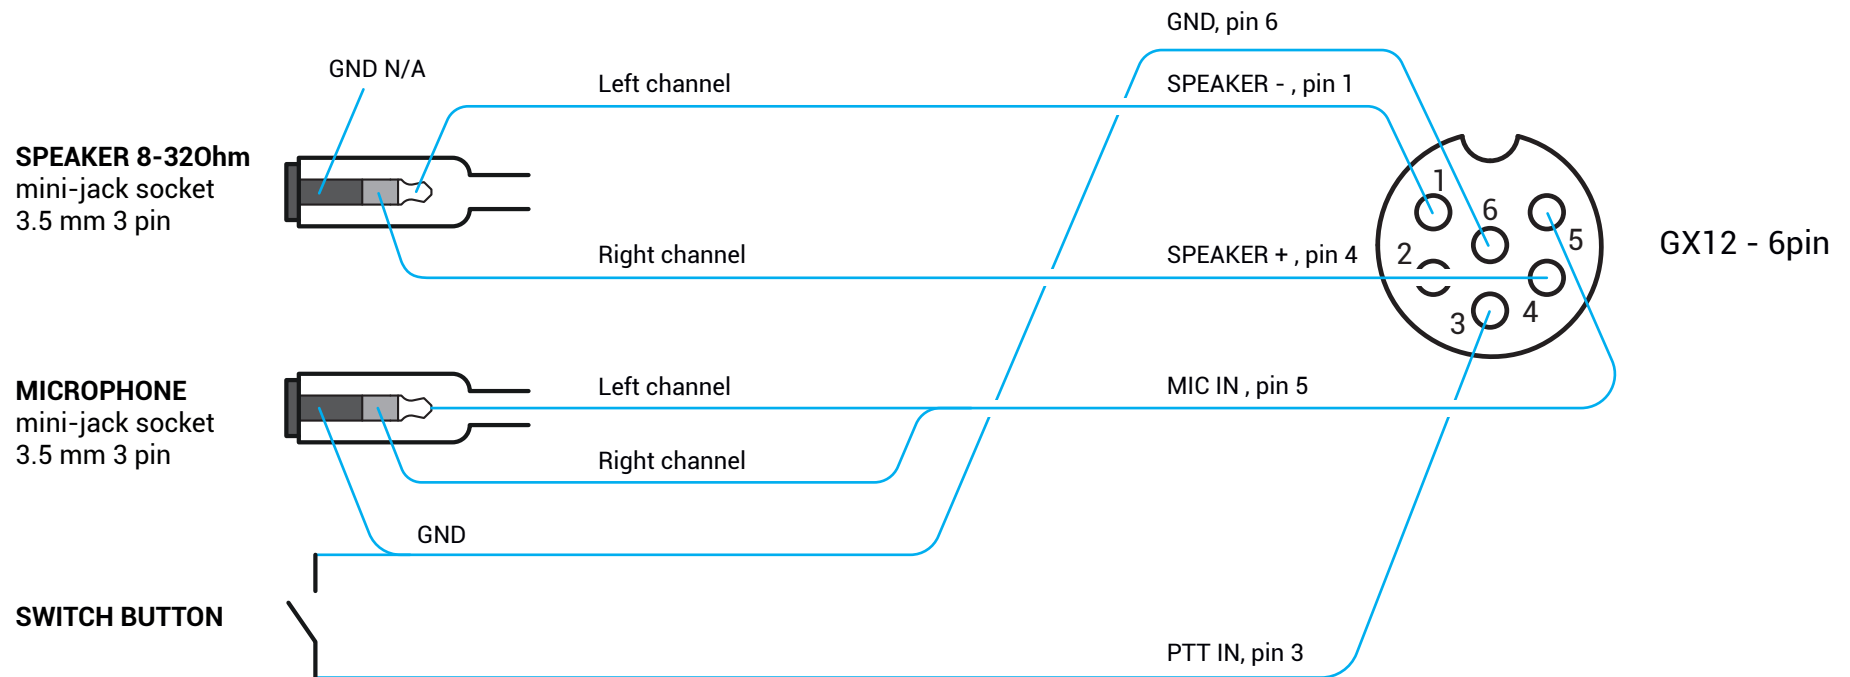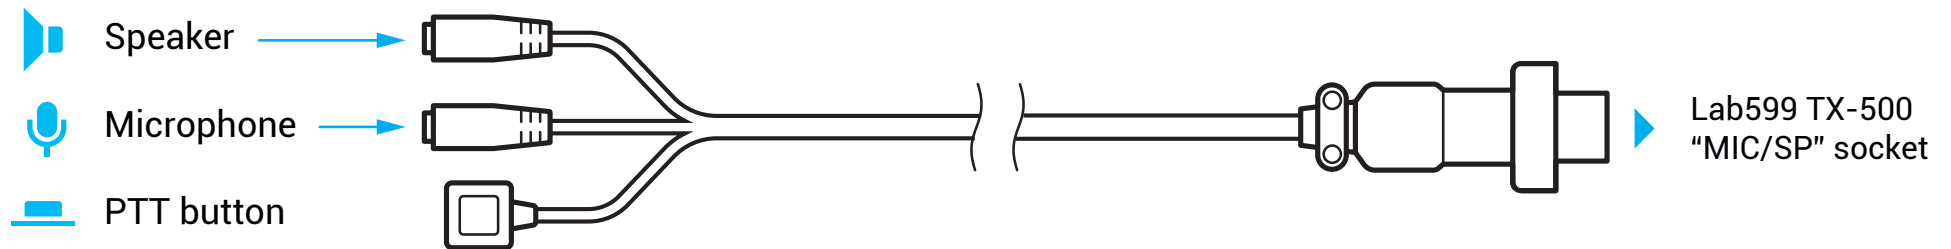

Dynamic microphone



Microphone

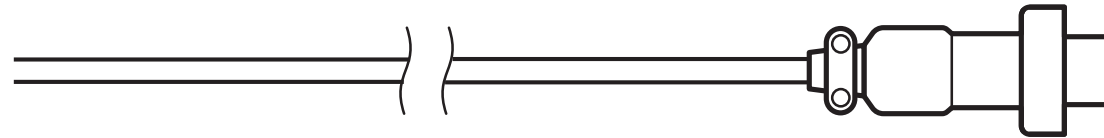


Lab599 TX-500
"MIC/SP" socket

MICROPHONE





GND, pin 6





GX12 - 6pin

MIC IN , pin 2

External Headset

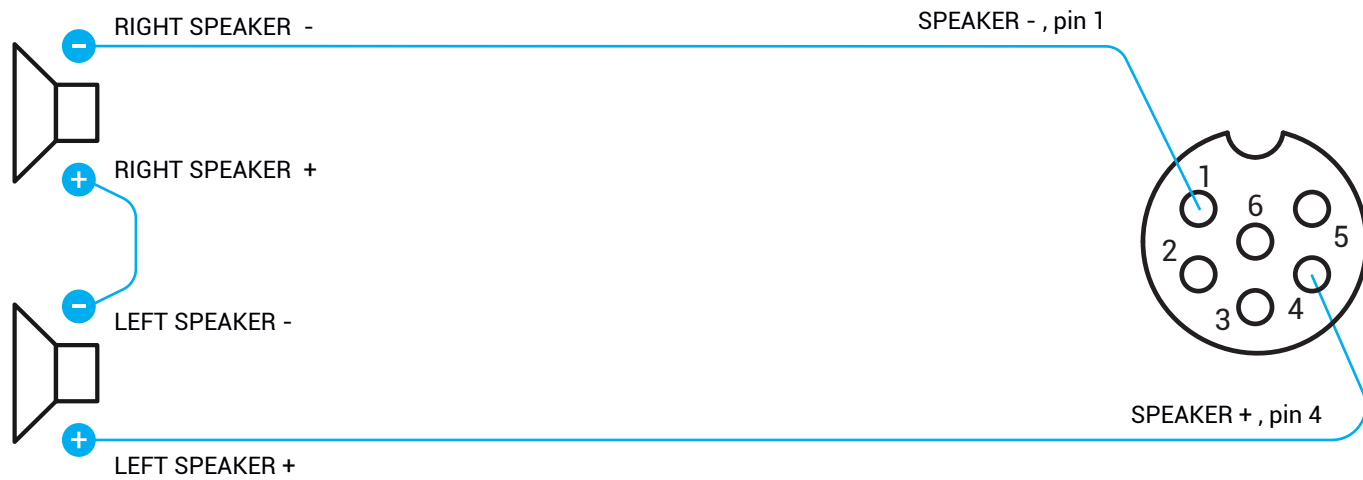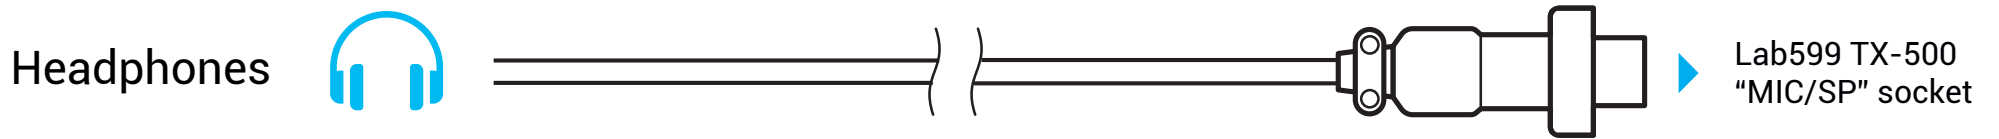

Audio data cable

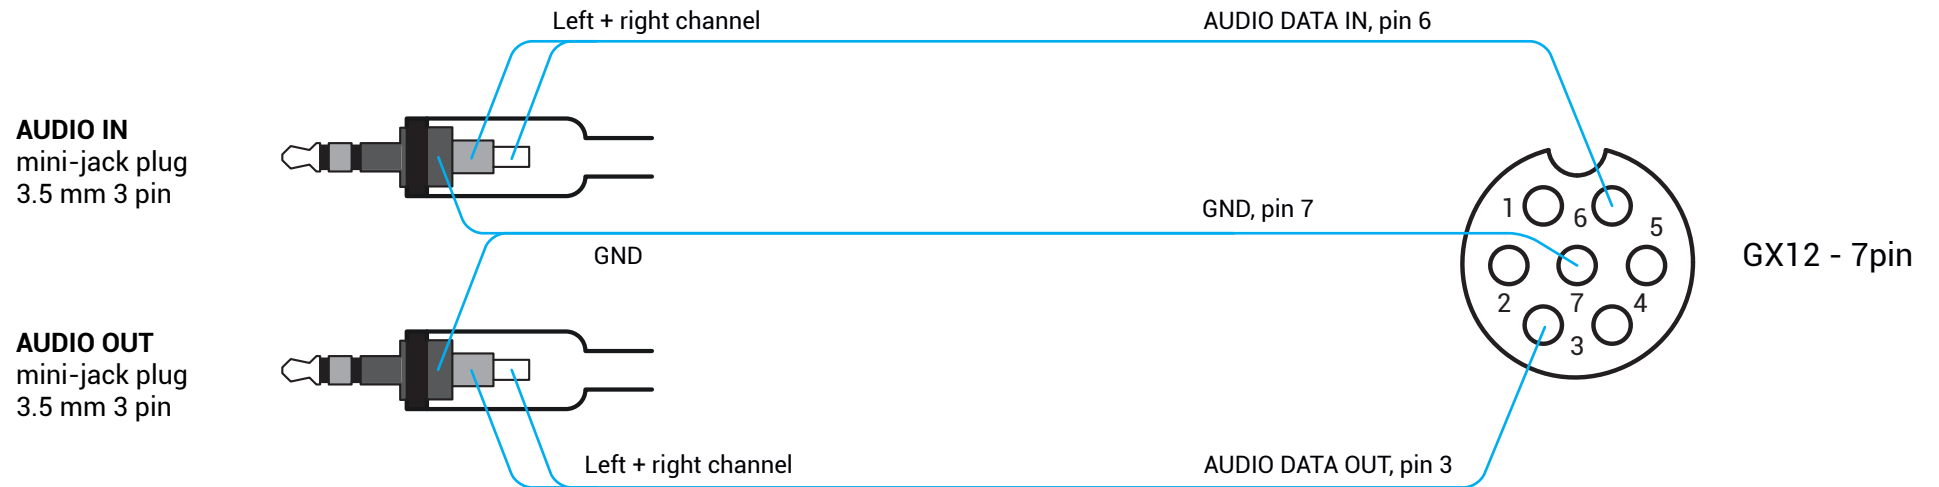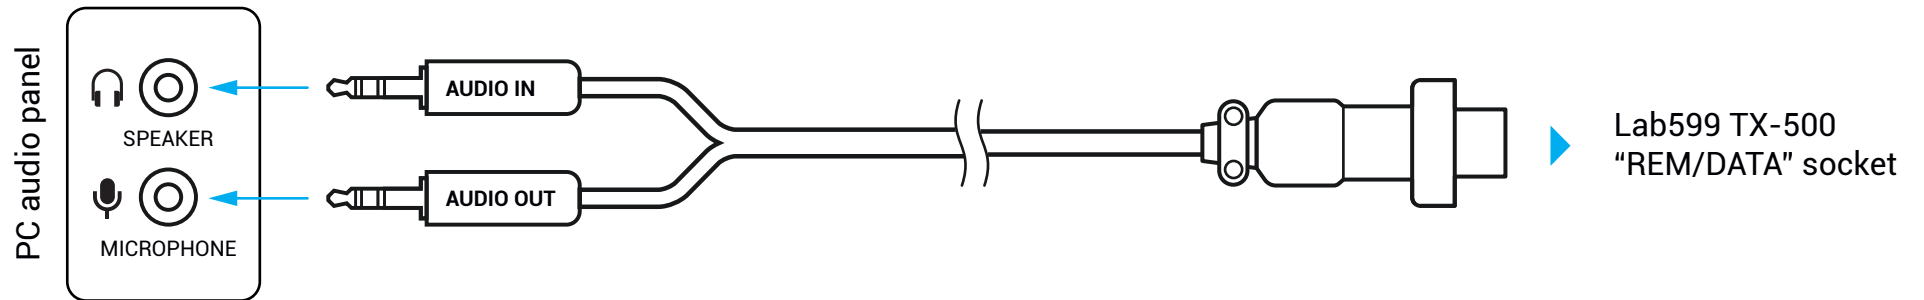


Audio data cable for smartphones

SMARTPHONE




SPEAKER / MIC
TRRS (CTIA)

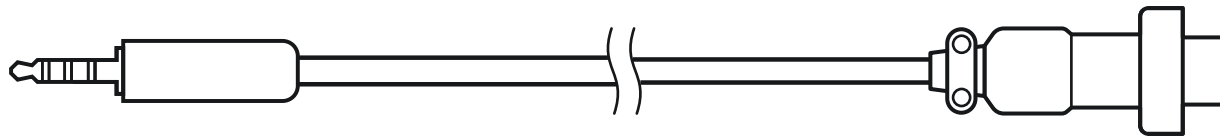

Lab599 TX-500
"REM/DATA" socket

TRRS (CTIA)
mini-jack plug
3.5 mm 4 pin

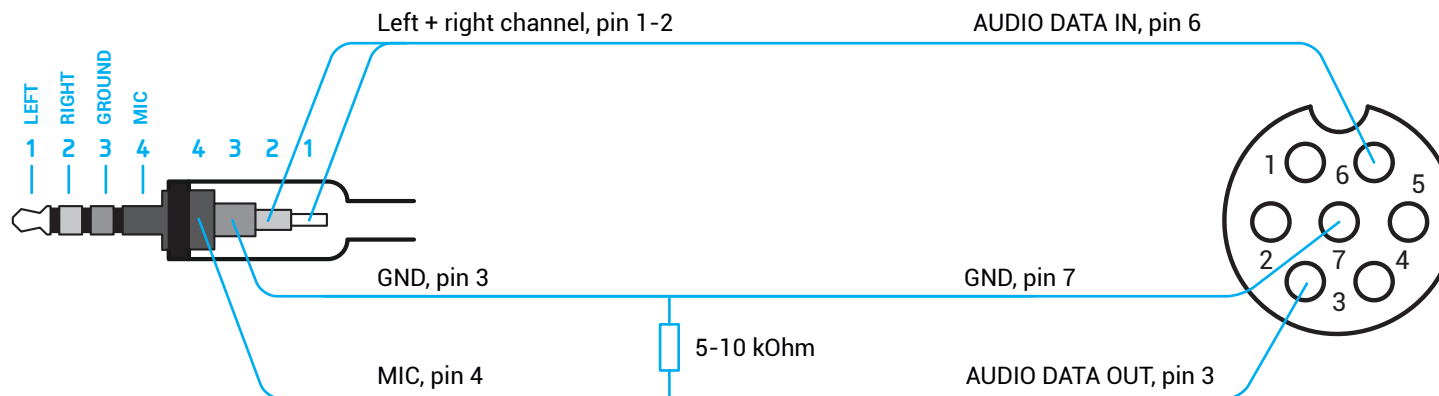

GX12 - 7pin

CAT-USB adapter

