



YAESU FEX-736-1.2


Separate Tx - Rx lines Mod

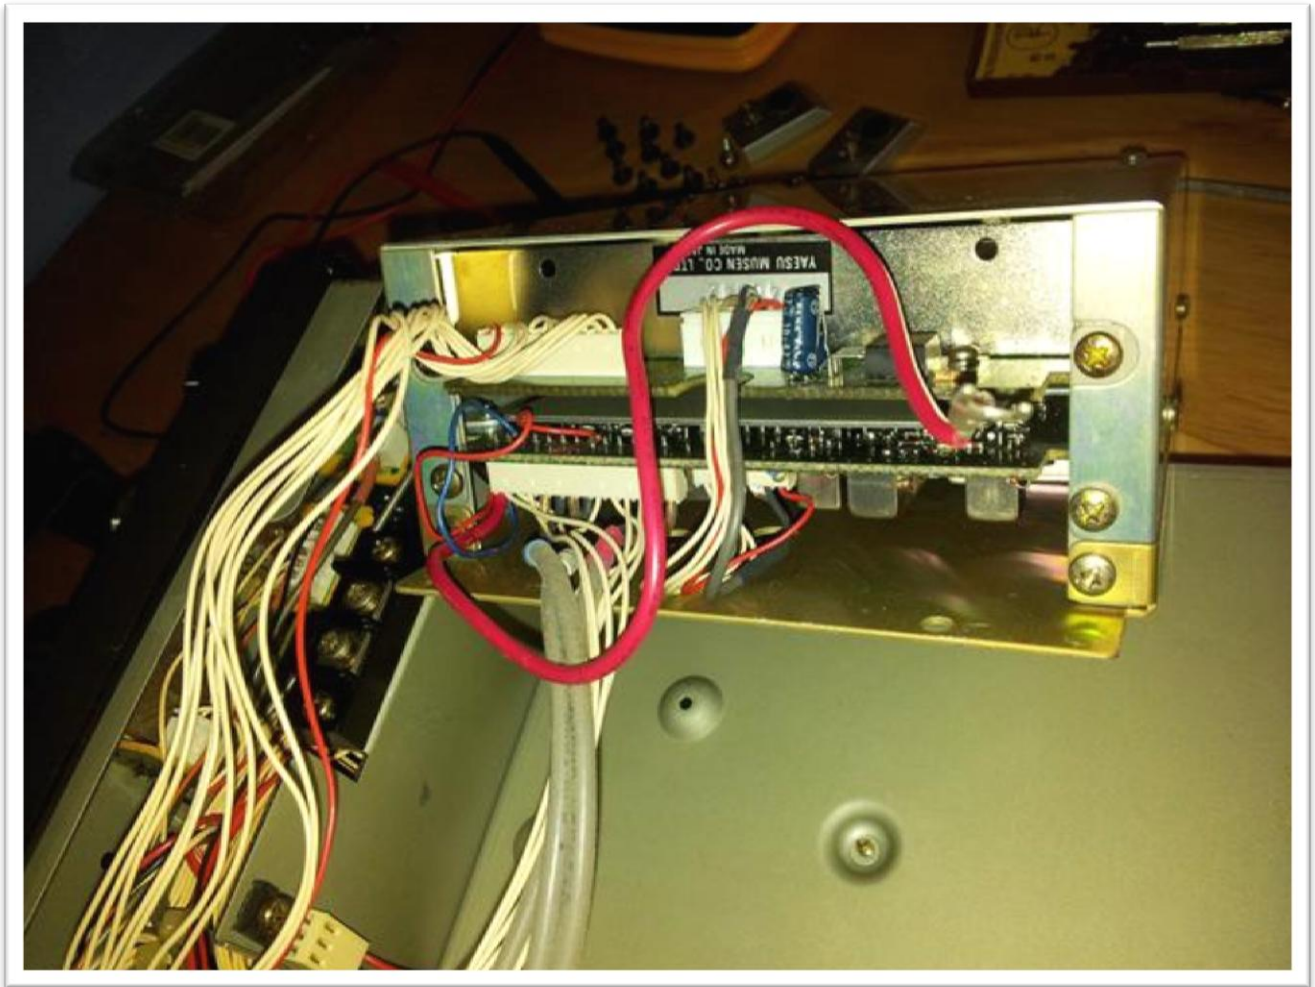


Open the radio and release the 1.2 module.
You only need to release a few cables, not all of them.

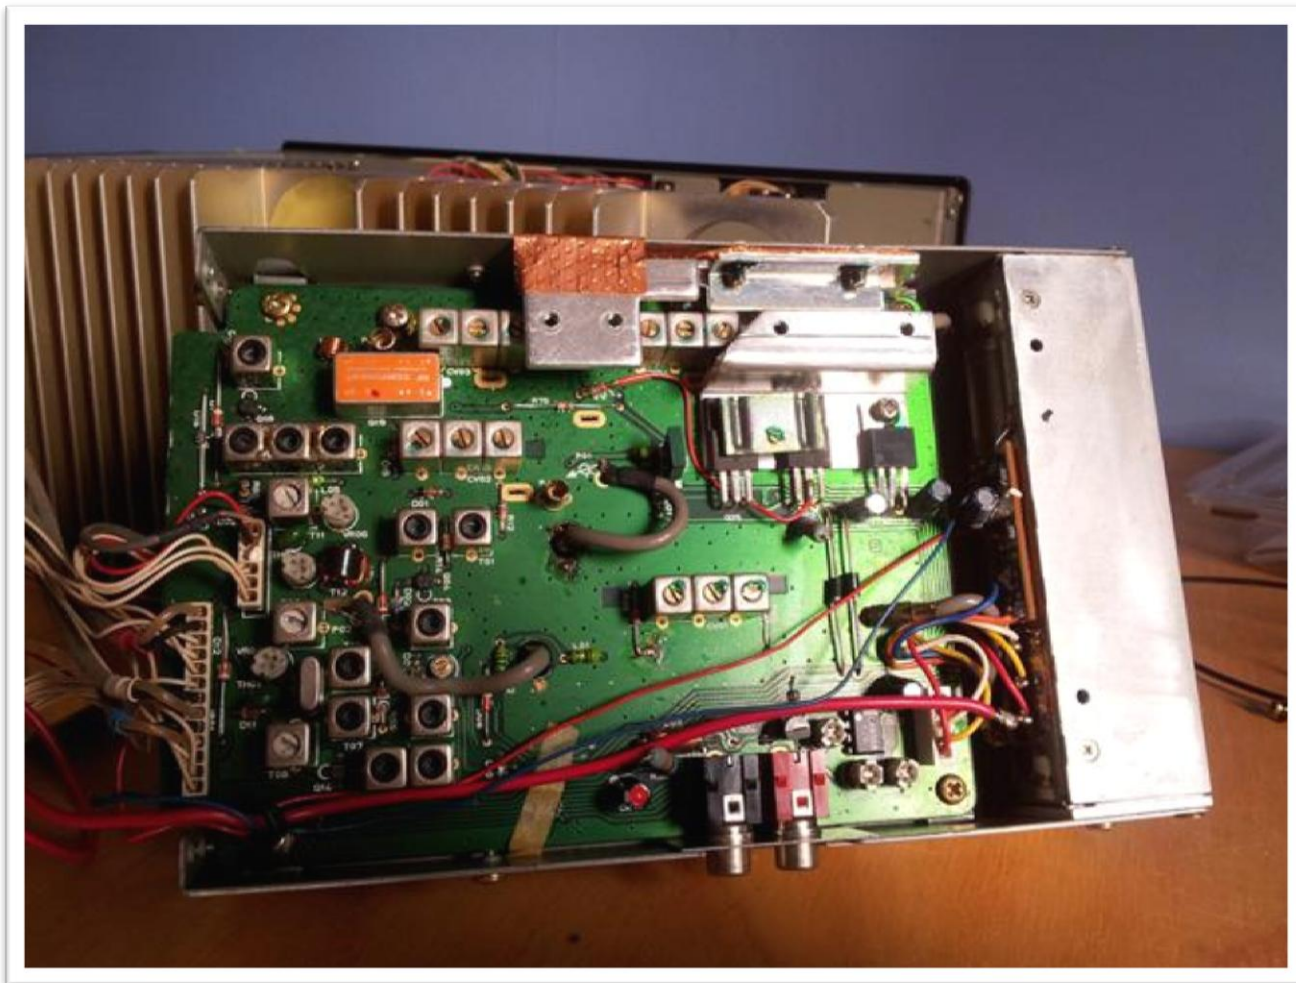

Open the top module cover

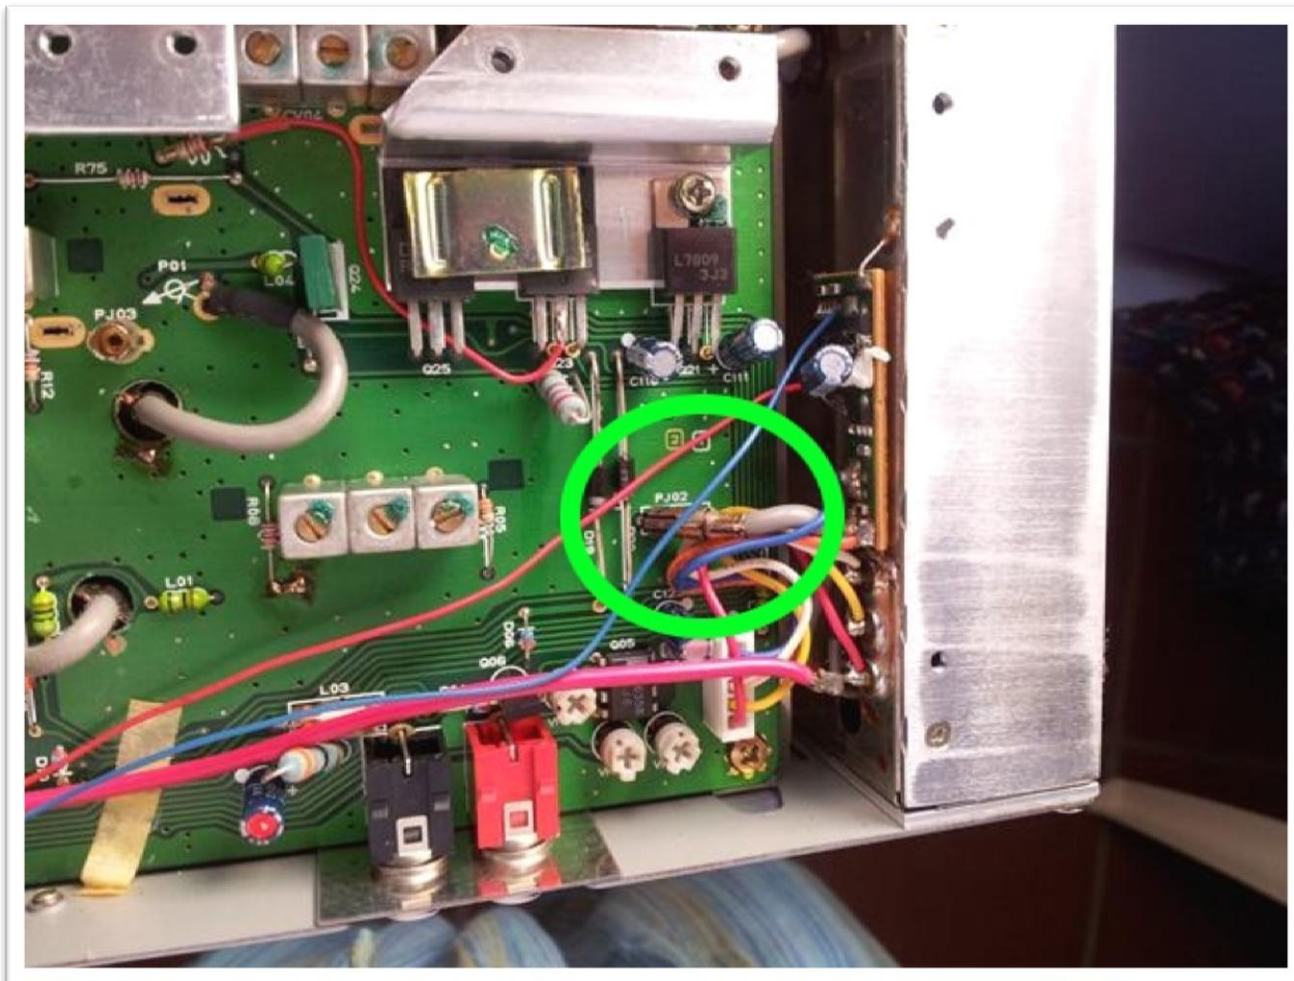


Locate the coax connection marked as **PJ02**

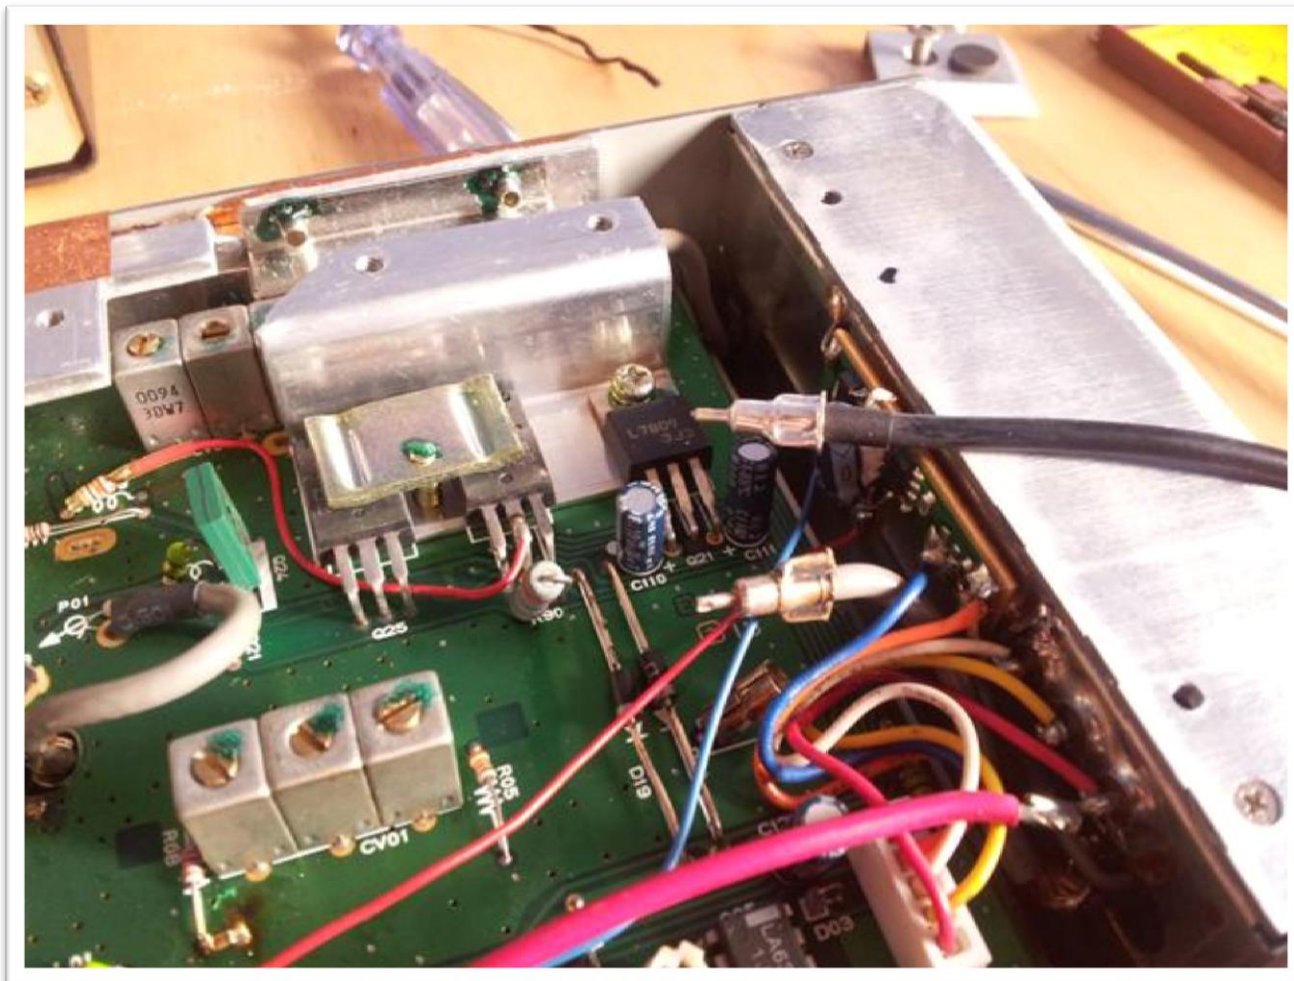

Remove the original coax and connect the new cable¹
with TMP connector

¹ http://www.box73.de/product_info.php?products_id=1990
<https://www.therfc.com/>

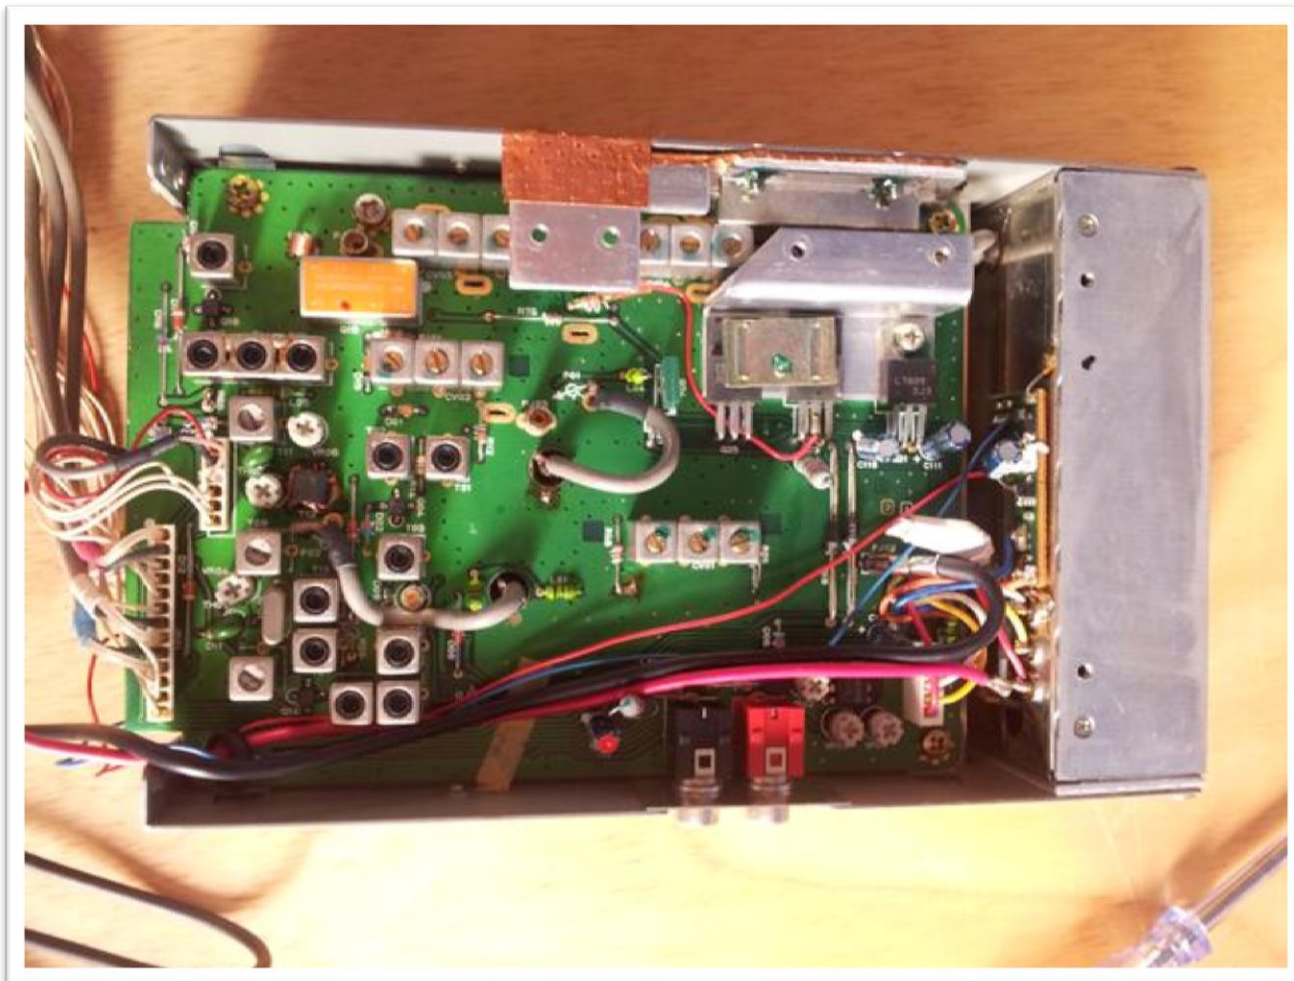

Apply some insulation tape to the old coax and fit the new coax.
New coax is getting out together with existing cables.



If the fourth module is not installed, you can use his space
as way out for new cables.

Now Tx is in the original connector and Rx in the new cable.

73, Maximo – EA1DDO

EA1DDO@HoTMaiL.com

<http://www.EA1DDO.es>