

AnyTone®

AT-779 MOBILE RADIO




- 199 programmable memorized channels
- Power Output: 15W/10W/5W
- Various scan functions
- CTCSS or DCS privacy tones
- PC programmable
- Keypad lockout




Specification

General		Transmitting Part			Receiving Part		
Frequency Range	VHF:66~88MHz		Wide band	Narrow band		Wide band	Narrow band
Number of Channels	199 Channels	Power Output	15W / 10W / 5W		Sensitivity (12dBm SINDA)	≤ 0.25 μ V	≤ 0.35 μ V
Channel Spacing	25K (Wide Band) 12.5K (Narrow band)	Modulation	16K Φ F3E	11K Φ F3E	Adjacent Channel Selectivity	≥ 60dB	≥ 60dB
Phase-locked Step	2.5K,5K,6.25K,10K,12.5K, 20K,25K,30K,50K	Adjacent Channel Power	≥ 70dB	≥ 60dB	Intermodulation	≥ 60dB	≥ 60dB
Operating Voltage	13.8V DC ± 15%	Hum & Noise	≥ 40dB	≥ 36dB	Spurious response	≥ 60dB	≥ 60dB
Squelch	Carrier/CTCSS/DCS	Spurious Emission	≥ 60dB	≥ 60dB	Audio Response	+1~-3dB (0.3~3KHz)	+1~-3dB (0.3~3KHz)
Frequency Stability	± 2.5ppm	Audio Response	+1~-3dB (0.3~3KHz)	+1~-3dB (0.3~3KHz)	Hum & Noise	≥ 45dB	≥ 40dB
Operating Temperature	-20℃~+60℃	Audio Distortion	≤ 5%		Audio distortion	≤ 5%	
Dimensions (WxDxH)	109 (W) x 104(D) x 25 (H)mm				Audio power output	>2W@16Ω	
Weight	about 0.45Kg						

Standard Accessories

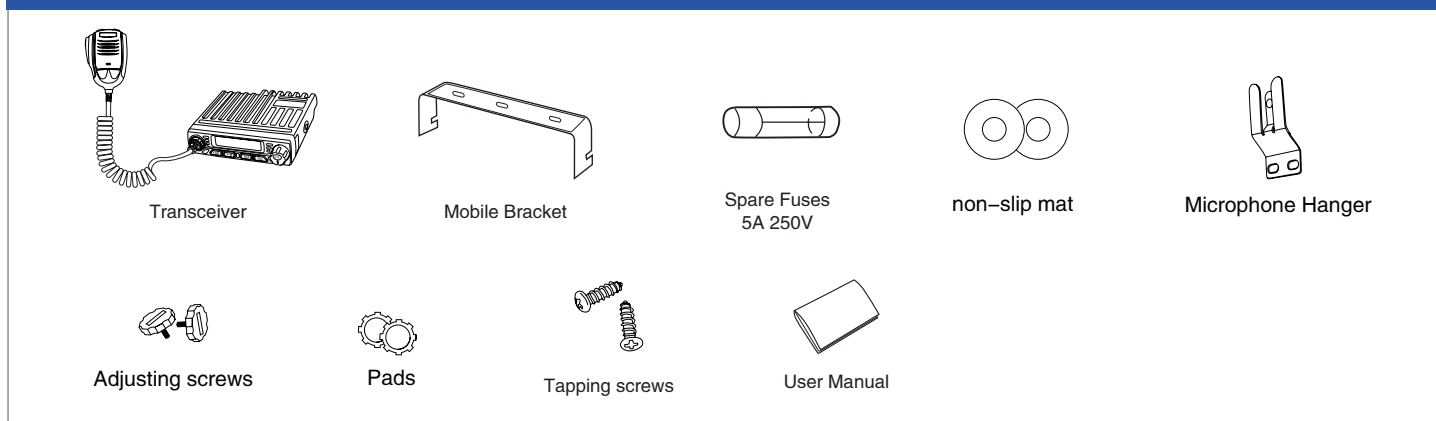

Optional Accessories

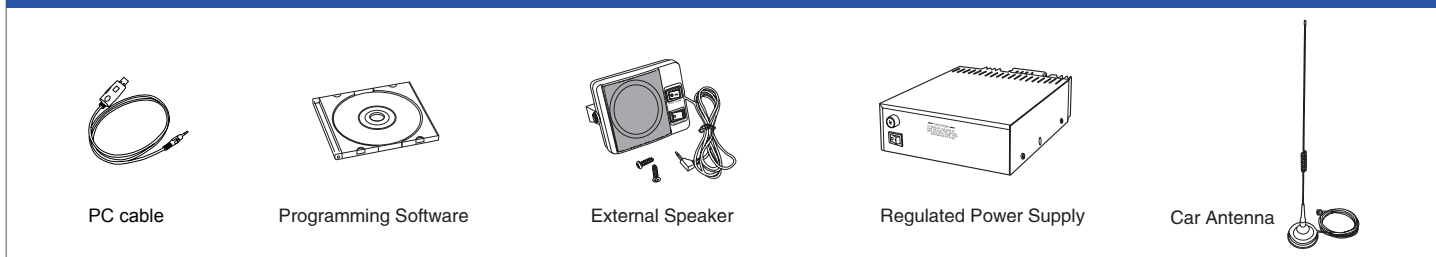

A1.190312



ISO 9001:14001

AnyTone®

Nevada

Address: • Unit 1 • Fitzherbert Spur • Farlington • Portsmouth • Hampshire • PO6 1TT
Phone: 023 9231 3090

Website: www.nevadaradio.co.uk